



Vehicle Standard (Australian Design Rule 98/02 – Advanced Emergency Braking for Passenger Vehicles and Light Goods Vehicles) 2026

I, XXX, XXX, determine this national road vehicle standard under section 12 of the *Road Vehicle Standards Act 2018*.

Dated

[DRAFT FOR CONSULTATION]

XXX

XXX

CONTENTS

1. LEGISLATIVE PROVISIONS.....3

2. FUNCTION.....3

3. APPLICABILITY3

4. DEFINITIONS5

5. REQUIREMENTS5

6. EXEMPTIONS AND ALTERNATIVE PROCEDURES5

7. ALTERNATIVE STANDARDS7

APPENDIX A8

1. LEGISLATIVE PROVISIONS

1.1. Name of Standard

1.1.1. This standard is the Vehicle Standard (Australian Design Rule 98/02 – Advanced Emergency Braking for Passenger Vehicles and Light Goods Vehicles) 2026.

1.1.2. This standard may also be cited as Australian Design Rule 98/02 – Advanced Emergency Braking for Passenger Vehicles and Light Goods Vehicles, Australian Design Rule 98/02, or ADR 98/02.

1.2. Commencement

1.2.1. This standard commences on the day after it is registered.

2. FUNCTION

2.1. The function of this standard is to specify requirements for Advanced Emergency Braking Systems fitted to passenger vehicles (other than omnibuses), and to light goods vehicles, to avoid or mitigate the severity of rear-end in lane collisions with a passenger car, and to avoid or mitigate the severity of an impact with a pedestrian or a bicycle.

3. APPLICABILITY

3.1. This standard applies to category MA, MB, MC and NA vehicles, from the dates set out in clauses 3.1.1 to 3.1.2 and the table under clause 3.3 below.

3.1.1. 1 November 2027 for all new model vehicles.

3.1.2. 1 November 2028 for all vehicles.

3.2. For the purposes of clause 3.1.1 above, a “new model” is a vehicle model first produced with a ‘*Date of Manufacture*’ on or after the date prescribed in that clause.

3.3. Applicability Table

Vehicle Category	ADR Category Code	UN Category Code*	Manufactured on or After**	Acceptable Prior Rules
Moped 2 wheels	LA	L ₁	Not Applicable	
Moped 3 wheels	LB	L ₂	Not Applicable	
Motor cycle	LC	L ₃	Not Applicable	
Motor cycle and sidecar	LD	L ₄	Not Applicable	
Motor tricycle	LE	L ₅		
	LEM		Not Applicable	
	LEP		Not Applicable	
	LEG		Not Applicable	
Passenger car	MA	M ₁	1 November 2027	Nil
Forward-control passenger vehicle	MB	M ₁	1 November 2027	Nil
Off-road passenger vehicle	MC	M ₁	1 November 2027	Nil
Light omnibus	MD	M ₂		
up to 3.5 tonnes 'GVM' and up to 12 seats	MD1		Not Applicable	
up to 3.5 tonnes 'GVM' and more than 12 seats	MD2		Not Applicable	
over 3.5 tonnes and up to 4.5 tonnes 'GVM'	MD3		Not Applicable	
over 4.5 tonnes and up to 5 tonnes 'GVM'	MD4		Not Applicable	
Heavy omnibus	ME	M ₃	Not Applicable	
Light goods vehicle	NA	N ₁	1 November 2027	Nil
Medium goods vehicle	NB	N ₂		
over 3.5 tonnes up to 4.5 tonnes 'GVM'	NB1		Not Applicable	
over 4.5 tonnes up to 12 tonnes 'GVM'	NB2		Not Applicable	
Heavy goods vehicle	NC	N ₃	Not Applicable	
Very light trailer	TA	O ₁	Not Applicable	
Light trailer	TB	O ₂	Not Applicable	
Medium trailer	TC	O ₃	Not Applicable	
Heavy trailer	TD	O ₄	Not Applicable	

* The category code may also be in the format L1, L2, L3 etc

** See clauses 3.1 to 3.2.

4. DEFINITIONS

- 4.1. For vehicle categories, definitions and meanings used in this Standard, refer to:
 - 4.1.1. Vehicle Standard (Australian Design Rule – Definitions and Vehicle Categories) 2005; and
 - 4.1.2. Definitions in Appendix A of this standard.

5. REQUIREMENTS

- 5.1. Vehicles must be equipped with an Advanced Emergency Braking System (AEBS) and meet the requirements of:
 - (a) Appendix A, as varied by clause 6 (Exemptions and Alternative Procedures); or
 - (b) the alternative standard under clause 7.1.

6. EXEMPTIONS AND ALTERNATIVE PROCEDURES

- 6.1. Compliance with the following paragraphs and annexes of Appendix A is not required for the purposes of this standard:

Paragraph 3	Application for approval
Paragraph 4	Approval
Paragraph 7	Modification of vehicle type and extension of approval
Paragraph 8	Conformity of production
Paragraph 9	Penalties for non-conformity of production
Paragraph 10	Production definitively discontinued
Paragraph 11	Names and addresses of the Technical Services responsible for conducting approval tests and of Type Approval Authorities
Paragraph 12	Transitional provisions

Annexes

Annex 1	Communication
Annex 2	Arrangements of approval marks

- 6.2. In paragraph 1 of Appendix A, omit footnote *.
- 6.3. In paragraph 5.1.1.2. of Appendix A, omit "for vehicles submitted to approval for car to car scenario", substitute "for all vehicles".
- 6.4. In paragraph 5.1.1.3. of Appendix A, omit "for vehicles submitted to approval for car to pedestrian scenario", substitute "for all vehicles".
- 6.5. In paragraph 5.1.1.4. of Appendix A, omit "for vehicles submitted to approval for car to bicycle scenario", substitute "for all vehicles".
- 6.6. Category MA vehicles may, as an alternative to the requirements in paragraph 5.1.7. of Appendix A, be equipped with a '*Brake System*' incorporating an '*Antilock System*', which meets the requirements of the Australian Design Rule 31/04 – Brake Systems for Passenger Cars.

- 6.7. Category MB, MC, and NA vehicles may, as an alternative to the requirements in paragraph 5.1.7. of Appendix A, be equipped with a ‘*Brake System*’ incorporating an ‘*Antilock System*’, which meets the requirements of the Australian Design Rule 31/04 – Brake Systems for Passenger Cars or the Australian Design Rule 35/07 – Commercial Vehicle Brake Systems.
- 6.8. In paragraphs 5.2.1.4., 5.2.2.4., 5.2.3.4., 6.1.6., 6.4., 6.5., 6.6.1., 6.7.1., 6.10.2. and 6.11.3. of Appendix A, omit “Technical Service” (wherever occurring), substitute “Testing Facility”.
- 6.9. In paragraphs 5.3.2. and 5.4.2.1. of Appendix A, omit “technical service at the time of type approval”, substitute “Testing Facility”.
- 6.10. In paragraph 5.5.2. of Appendix A, omit “at the time of type-approval,”.
- 6.11. In paragraph 5.6.1. of Appendix A, omit “At a Periodic Technical Inspection,”.
- 6.12. Omit paragraph 5.6.2. of Appendix A.
- 6.13. In paragraph 6.2.2.2. of Appendix A, omit “vehicle type approval”.
- 6.14. In paragraph 6.11.3. of Appendix A, omit “Type Approval Authority or its”.
- 6.15. Omit paragraph 6.11.3.1. of Appendix A.
- 6.16. In paragraphs 1., 3.1., 3.1.1., 3.4.3., 3.4.4., 4.1.1., 4.1.2. and 5. in Annex 3 of Appendix A, omit “Technical Service” (wherever occurring), substitute “Testing Facility”.
- 6.17. In paragraph 1. in Annex 3 of Appendix A, omit “, for type approval purposes”.
- 6.18. In paragraph 3.1. in Annex 3 of Appendix A, omit “For periodic technical inspections,”.
- 6.19. In paragraph 3.1.1. (a) in Annex 3 of Appendix A, omit “for the approval”, omit “at the time of submission of the type-approval application”, and omit “The Technical Service shall ensure that this documentation package remains available for a period determined in agreement with the Approval Authority. This period shall be at least 10 years counted from the time when production of the vehicle is definitely discontinued”.
- 6.20. In paragraph 3.1.1. (b) in Annex 3 of Appendix A, omit “at the time of type approval”, and omit “The manufacturer shall ensure that this material and analysis data remains available for a period of 10 years counted from the time when production of the vehicle is definitely discontinued”.
- 6.21. In paragraph 3.4.4. in Annex 3 of Appendix A, omit “at the time of the type-approval”.

- 6.22. In paragraph 5. in Annex 3 of Appendix A, omit “to the Type Approval Authority”.
- 6.23. In paragraph 3.11. in Annex 3 – Appendix 1 of Appendix A, omit “Technical Service”, substitute “Testing Facility”.
- 6.24. Omit paragraph 3.12. (including the footnote) in Annex 3 – Appendix 1 of Appendix A.
- 6.25. Under ‘False Reaction scenarios’ in Annex 3 – Appendix 2 of Appendix A, omit “Technical Service”, substitute “Testing Facility”.
- 6.26. In paragraphs 2.1.1., 2.5.1., 2.5.2., 2.5.7., 2.5.8. and 3.1. in Annex 4 of Appendix A, omit “Type Approval Authority or its”.
- 6.27. In paragraphs 2.1.1., 2.3., 2.5.1., 2.5.2., 2.5.7., 2.5.8. and 3.1. in Annex 4 of Appendix A, omit “Technical Service” (wherever occurring), substitute “Testing Facility”.
- 6.28. If there is a conflict between clause 6 (exemptions and alternative procedures) and Appendix A, clause 6 takes precedence.

7. ALTERNATIVE STANDARDS

- 7.1. For vehicles equipped with an Advanced Emergency Braking System, the technical requirements applicable to vehicles submitted for approval for car to car, car to pedestrian and car to bicycle scenarios, of the United Nations Regulation No. 152 – UNIFORM PROVISIONS CONCERNING THE APPROVAL OF MOTOR VEHICLES WITH REGARD TO THE ADVANCED EMERGENCY BRAKING SYSTEMS (AEBS) FOR M₁ AND N₁ VEHICLES, incorporating the 02 series of amendments, including at least supplements 1 to 5 to the 02 series of amendments.

APPENDIX A

Agreement

Concerning the Adoption of Harmonized Technical United Nations Regulations for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these United Nations Regulations*

(Revision 3, including the amendments which entered into force on 14 September 2017)

Addendum: 151 - UN Regulation. 152

Incorporating by the Department of Infrastructure, Transport, Regional Development, Communications, Sport and the Arts, all valid text up to:

Supplement 1 to the 01 series of amendments – Date of entry into force: 3 January 2021
Supplement 2 to the 01 series of amendments – Date of entry into force: 30 September 2021
02 series of amendments – Date of entry into force: 30 September 2021
Supplement 1 to the 02 series of amendments – Date of entry into force: 22 June 2022
Supplement 2 to the 02 series of amendments – Date of entry into force: 8 October 2022
Supplement 3 to the 02 series of amendments – Date of entry into force: 24 September 2023
Supplement 4 to the 02 series of amendments – Date of entry into force: 26 September 2025
Supplement 5 to the 02 series of amendments – Date of entry into force: XX January 2026

Uniform provisions concerning the approval of motor vehicles with regard to the Advanced Emergency Braking Systems (AEBS) for M₁ and N₁ vehicles

* Former titles of the Agreement:
Agreement concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958 (original version);
Agreement concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, done at Geneva on 5 October 1995 (Revision 2).

UN Regulation No. 152

Uniform provisions concerning the approval of motor vehicles with regard to the Advanced Emergency Braking Systems (AEBS) for M₁ and N₁ vehicles

Contents

Page

1.	Scope	11
2.	Definitions	11
3.	Application for approval	13
4.	Approval	13
5.	Specifications	14
6.	Test procedure	24
7.	Modification of vehicle type and extension of approval	3131
8.	Conformity of production	31
9.	Penalties for non-conformity of production	3131
10.	Production definitively discontinued	32
11.	Names and addresses of the Technical Services responsible for conducting approval tests and of Type Approval Authorities	32
12.	Transitional Provisions	32

Annexes

1	Communication	3434
2	Arrangement of approval markings	35
3	Special requirements to be applied to the safety aspects of electronic control systems	36
	Appendix 1 - Model assessment form for electronic systems	42
	Appendix 2 - False Reaction scenarios	44

Introduction

The intention of this Regulation is to establish uniform provisions for Advanced Emergency Braking Systems (AEBS) fitted to motor vehicles of the Categories M₁ and N₁ primarily used within urban driving conditions.

The system shall automatically detect an imminent forward collision, provide the driver with an appropriate warning and activate the vehicle braking system to decelerate the vehicle with the purpose of avoiding or mitigating the severity of a collision in the event that the driver does not respond to the warning.

In the case of a failure in the system, the safe operation of the vehicle shall not be endangered.

During any action taken by the system, the driver can, at any time through a conscious action, e.g. by a steering action or an accelerator kick-down, take control and override the system.

This Regulation cannot cover all the traffic conditions and infrastructure features in the type-approval process; this Regulation recognises that the performances required in this Regulation cannot be achieved in all conditions (vehicle condition, road adhesion, weather conditions, deteriorated road infrastructure and traffic scenarios etc. may affect the system performances). Actual conditions and features in the real world should not result in false warnings or false braking to the extent that they encourage the driver to switch the system off.

The Regulation provides the requirements for the approval for an AEBS designed to avoid collision either with cars or pedestrians or both.

This Regulation is an "if-fitted" regulation. It shall not prevent contracting parties from mandating the fitting of AEBS designed to avoid collision either with cars or pedestrians or both approved in accordance to this Regulation.

1. Scope

This Regulation applies to the approval of vehicles of Category M₁ and N₁¹ * with regard to an on-board system to

- (a) Avoid or mitigate the severity of a rear-end in lane collision with a passenger car;
- (b) Avoid or mitigate the severity of an impact with a pedestrian;
- (c) Avoid or mitigate the severity of an impact with a bicycle.

* This Regulation also offers an alternative set of requirements for vehicles of Category M₂, and for those of Categories M₃/N₂ with a maximum weight below or equal to 8 tons, equipped with hydraulic braking, to those contained in UN Regulation No. 131.

For the vehicles described above, Contracting Parties that apply both UN Regulation No. 131 and this Regulation recognise approvals to either regulation as equally valid.

2. Definitions

For the purposes of this Regulation:

- 2.1. "*Advanced Emergency Braking System (AEBS)*" means a system which can automatically detect an imminent forward collision and activate the vehicle braking system to decelerate the vehicle with the purpose of avoiding or mitigating-a collision.
- 2.2. "*Emergency Braking*" means a braking demand emitted by the AEBS to the service braking system of the vehicle.
- 2.3. "*Collision Warning* " means a warning emitted by the AEBS to the driver when the AEBS has detected an imminent forward collision.
- 2.4. "*Vehicle Type with Regard to its Advanced Emergency Braking System*" means a category of vehicles which do not differ in such essential aspects as:
 - (a) Vehicle features which significantly influence the performances of the Advanced Emergency Braking System;
 - (b) The type and design of the Advanced Emergency Braking System.
- 2.5. "*Subject Vehicle*" means the vehicle being tested.
- 2.6. "*Soft Target*" means a target that will suffer minimum damage and cause minimum damage to the subject vehicle in the event of a collision.
- 2.7. "*Vehicle Target*" means a target that represents a vehicle
- 2.8. "*Pedestrian Target*" means a soft target that represents a pedestrian
- 2.9. "*Bicycle Target*" means a soft target that represents a bicycle with cyclist
- 2.10. "*Common Space*" means an area on which two or more information functions (e.g. symbol) may be displayed, but not simultaneously.

¹ As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2 - <https://unece.org/transport/standards/transport/vehicle-regulations-wp29/resolutions>

- 2.11. "Self-Check" means an integrated function that checks for a system failure on a continuous basis at least while the system is active.
- 2.12. "Time To Collision (TTC)" means the value of time obtained by dividing the longitudinal distance (in the direction of travel of the subject vehicle) between the subject vehicle and the target by the longitudinal relative speed of the subject vehicle and the target, at any instant in time.
- 2.13. "Dry road affording good adhesion" means a road with a sufficient nominal² Peak Braking Coefficient (PBC) that would permit:
- (a) A mean fully developed deceleration of at least 9 m/s² ; or
 - (b) The design maximum deceleration of the relevant vehicle;
- Whichever is lower.
- 2.14. "Sufficient nominal Peak Braking Coefficient (PBC)": means a road surface friction coefficient of:
- (a) 0.9, when measured using the American Society for Testing and Materials (ASTM) of E1136-19 standard reference test tyre in accordance with ASTM Method E1337-19 at a speed of 40 mph;
 - (b) 1.017, when measured using either:
 - (i) The American Society for Testing and Materials (ASTM) of F2493-20 standard reference test tyre in accordance with ASTM Method E1337-19 at a speed of 40 mph; or
 - (ii) The k-test method specified in Appendix 2 to Annex 6 of UN Regulation No. 13-H.
 - (c) The required value to permit the design maximum deceleration of the relevant vehicle, when measured using the k-test method in Appendix 2 to Annex 13 of UN Regulation No. 13.
- 2.15. "Initialisation" means the process of setting-up the operation of the system after switching ON the vehicle until it is fully functioning.
- 2.16. "Mass of a vehicle in running order" means the mass of an unladen vehicle with bodywork, including coolant, oils, at least 90 per cent of fuel, 100 per cent of other liquids, driver (75 kg) but except used waters, tools, spare wheel.
- 2.17. "Maximum mass" means the maximum mass stated by the vehicle manufacturer to be technically permissible (this mass may be higher than the "permissible maximum mass" laid down by the national administration).
- 2.18. "The mean fully developed deceleration (d_m)" shall be calculated as the deceleration averaged with respect to distance over the interval v_b to v_e , according to the following formula:

$$d_m = \frac{v_b^2 - v_e^2}{25.92(s_e - s_b)}$$

Where:

v_o = initial vehicle speed in km/h,

v_b = vehicle speed at 0.8 v_o in km/h,

v_e = vehicle speed at 0.1 v_o in km/h,

² The "nominal" value is understood as being the theoretical target value.

s_b = distance travelled between v_o and v_b in metres,

s_e = distance travelled between v_o and v_e in metres.

The speed and distance shall be determined using instrumentation having an accuracy of ± 1 per cent at the prescribed speed for the test. The d_m may be determined by other methods than the measurement of speed and distance; in this case, the accuracy of the d_m shall be within ± 3 per cent

3. Application for approval

- 3.1. The application for approval of a vehicle type with regard to the AEBS shall be submitted by the vehicle manufacturer or by his authorised representative.
- 3.2. It shall be accompanied by the documents mentioned below in triplicate:
 - 3.2.1. A description of the vehicle type with regard to the items mentioned in paragraph 2.4., together with a documentation package which gives access to the basic design of the AEBS and the means by which it is linked to other vehicle systems or by which it directly controls output variables. The numbers and/or symbols identifying the vehicle type shall be specified.
- 3.3. A vehicle representative of the vehicle type to be approved shall be submitted to the Technical Service conducting the approval tests.

4. Approval

- 4.1. If the vehicle type submitted for approval pursuant to this Regulation meets the requirements of paragraph 5. below, approval of that vehicle shall be granted.
- 4.2. An approval number shall be assigned to each type approved; its first two digits (at present 00 corresponding to the 00 series of amendments) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same number to the same vehicle type equipped with another type of AEBS, or to another vehicle type.
- 4.3. Notice of approval or of refusal or withdrawal of approval pursuant to this Regulation shall be communicated to the Contracting Parties to the Agreement which apply this Regulation by means of a form conforming to the model in Annex 1 and documentation supplied by the applicant being in a format not exceeding A4 (210 × 297mm), or folded to that format, and on an appropriate scale or electronic format.
- 4.4. There shall be affixed, conspicuously and in a readily accessible place specified on the approval form, to every vehicle conforming to a vehicle type approved under this Regulation, an international approval mark conforming to the model described in Annex 2, consisting of:
 - 4.4.1. A circle surrounding the Letter "E" followed by the distinguishing number of the country which has granted approval;³

³ The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to the Consolidated Resolution on the Construction of Vehicles (R.E.3), document ECE/TRANS/WP.29/78/Rev.6, Annex 3 - <https://unece.org/transport/standards/transport/vehicle-regulations-wp29/resolutions>

- 4.4.2. The number of this Regulation, followed by the Letter "R", a dash and the approval number to the right of the circle prescribed in paragraph 4.4.1. above.
- 4.5. If the vehicle conforms to a vehicle type approved under one or more other Regulations, annexed to the Agreement, in the country which has granted approval under this Regulation, the symbol prescribed in paragraph 4.4.1. above need not be repeated; in such a case, the Regulation and approval numbers and the additional symbols shall be placed in vertical columns to the right of the symbol prescribed in paragraph 4.4.1. above.
- 4.6. The approval mark shall be clearly legible and be indelible.
- 4.7. The approval mark shall be placed close to or on the vehicle data plate.

5. Specifications

- 5.1. General requirements
 - 5.1.1. Any vehicle fitted with an AEBS complying with the definition of paragraph 2.1. above shall, when activated and operated within the prescribed speed ranges, meet the performance requirements:
 - 5.1.1.1. of paragraphs 5.1. and paragraphs 5.3. to 5.6. of this Regulation for all vehicles;
 - 5.1.1.2. of paragraph 5.2.1. of this Regulation for vehicles submitted to approval for Car to car scenario;
 - 5.1.1.3. of paragraph 5.2.2. of this Regulation for vehicles submitted to approval for Car to pedestrian scenario.
 - 5.1.1.4. Of paragraph 5.2.3. of this Regulation for vehicles submitted to approval for Car to bicycle scenario.
 - 5.1.2. The effectiveness of AEBS shall not be adversely affected by magnetic or electrical fields. This shall be demonstrated by fulfilling the technical requirements and respecting the transitional provisions of the 06 series of amendments to UN Regulation No. 10.
 - 5.1.3. Conformity with the safety aspects of electronic control systems shall be shown by meeting the requirements of Annex 3.
 - 5.1.4. Warnings and information
 - In addition to the collision warnings described in paragraphs 5.2.1.1. and 5.2.2.1., the system shall provide the driver with appropriate warning(s) as below:
 - 5.1.4.1. A failure warning when there is a failure in the AEBS that prevents the requirements of this Regulation of being met. The warning shall be as specified in paragraph 5.5.4.
 - 5.1.4.1.1. There shall not be an appreciable time interval between each AEBS self-check, and subsequently there shall not be a delay in illuminating the warning signal, in the case of an electrically detectable failure.
 - 5.1.4.1.2. Upon detection of any non-electrical failure condition (e.g. sensor blindness or sensor misalignment), the warning signal as defined in paragraph 5.1.4.1. shall be illuminated.
 - 5.1.4.2. If the system has not been initialised after a cumulative driving time of 15 seconds above a speed of 10km/h, information of this status shall be indicated

- to the driver. This information shall exist until the system has been successfully initialised.
- 5.1.4.3. A deactivation warning, if the vehicle is equipped with a means to deactivate the AEBS, shall be given when the system is deactivated. This shall be as specified in paragraph 5.4.3.
- 5.1.5. Emergency braking
- Subject to the provisions of paragraphs 5.3.1. and 5.3.2., the system shall provide emergency braking interventions described in paragraphs 5.2.1.2., 5.2.2.2. and 5.2.3.2. having the purpose of significantly decreasing the speed of the subject vehicle.
- 5.1.6. False reaction avoidance
- The system shall be designed to minimise the generation of collision warning signals and to avoid advanced emergency braking in situations where there is no risk of an imminent collision. This shall be demonstrated in the assessment carried out under Annex 3, and this assessment shall include in particular scenarios listed in Appendix 2 of Annex 3.
- 5.1.7. Any vehicle fitted with an AEBS shall meet the performance requirements of UN Regulation No. 13-H in its 01 series of amendments for vehicles of Category M₁ and N₁ or Regulation No. 13 in its 11 series of amendments for vehicles of Category N₁ and shall be equipped with an anti-lock braking function in accordance with the performance requirements of Annex 6 to UN Regulation No.13-H in its 01 series of amendments or of Annex 13 to UN Regulation No. 13 in its 11 series of amendments.
- 5.2. Specific Requirements
- 5.2.1. Car to car scenario
- 5.2.1.1. Collision warning
- When an imminent collision with a preceding vehicle of Category M₁, in the same lane is detected with a relative speed above that speed up to which the subject vehicle is able to avoid the collision (within the conditions specified in paragraph 5.2.1.4.), a collision warning shall be provided as specified in paragraph 5.5.1., and shall be triggered at the latest 0.8 seconds before the start of emergency braking.
- However, in case the collision cannot be anticipated in time to give a collision warning 0.8 seconds ahead of an emergency braking a collision warning shall be provided as specified in paragraph 5.5.1. and shall be provided no later than the start of emergency braking intervention.
- The collision warning may be aborted if the conditions prevailing a collision are no longer present.
- This shall be tested according to paragraphs 6.4. and 6.5.
- 5.2.1.2. Emergency braking
- When the system has detected the possibility of an imminent collision, there shall be a braking demand of at least 5.0 m/s² to the service braking system of the vehicle. This does not prohibit higher deceleration demand values than 5 m/s² during the collision warning for very short durations, e.g. as haptic warning to stimulate the driver's attention.

The emergency braking may be aborted or the deceleration demand may be reduced below the threshold above (as relevant), if the conditions prevailing a collision are no longer present or the risk of a collision has decreased.

This shall be tested in accordance with paragraphs 6.4. and 6.5. of this Regulation.

5.2.1.3. Speed range

The system shall be active at least within the vehicle speed range between 10 km/h and 60 km/h and at all vehicle load conditions, unless deactivated as per paragraph 5.4.

5.2.1.4. Speed reduction by braking demand

In absence of driver's input which would lead to interruption according to paragraph 5.3.2., the AEBS shall be able to achieve a relative impact speed that is less or equal to the maximum relative impact speed as shown in the following table, provided:

- (a) Vehicle external influences allow for the required deceleration, i.e.:
 - (i) The road is flat, horizontal and dry affording good adhesion;
 - (ii) The weather conditions do not affect the dynamic performance of the vehicle (e.g. no storm, not below 0°C);
- (b) The vehicle state itself allows for the required deceleration, e.g.:
 - (i) The tyres are in an appropriate state and properly inflated;
 - (ii) The brakes are properly operational (brake temperature, pads condition etc.);
 - (iii) There is no severe uneven load distribution;
 - (iv) No trailer is coupled to the motor vehicle and the mass of the motor vehicle is between maximum mass and mass in running order conditions;
- (c) There are no external influences affecting the physical sensing capabilities, i.e.:
 - (i) The ambient illumination conditions are at least 1000 Lux and there is no extreme blinding of the sensors (e.g. direct blinding sunlight, highly RADAR-reflective environment);
 - (ii) The target vehicle is not extreme with regard to the Radar Cross Section (RCS) or the shape/silhouette (e.g. below fifth percentile of RCS of all M₁ vehicles)
 - (iii) There are no significant weather conditions affecting the sensing capabilities of the vehicle (e.g. heavy rain, dense fog, snow, dirt);
 - (iv) There are no overhead obstructions close to the vehicle;
- (d) The situation is unambiguous, i.e.:
 - (i) The preceding vehicle belongs to Category M₁, is unobstructed, clearly separated from other objects in the driving lane and constantly travelling or stationary;
 - (ii) The vehicle longitudinal centre planes are displaced by not more than 0.2 m;

- (iii) The direction of travel is straight with no curve, and the vehicle is not turning at an intersection and following its lane.

When conditions deviate from those listed above, the system shall not deactivate or unreasonably switch the control strategy. This shall be demonstrated by the manufacturer in accordance with Annex 3 of this Regulation and, if deemed justified, may be followed by testing by the Technical Service in conditions deviating from those listed above or those in paragraph 6. The rationale for and the results of this verification testing shall be appended to the test report.

Maximum relative Impact Speed (km/h) for M₁ vehicle⁴

Relative Speed (km/h)	Stationary/ Moving	
	Maximum mass	Mass in running order
10	0.00	0.00
15	0.00	0.00
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00
35	0.00	0.00
40	0.00	0.00
42	10.00	0.00
45	15.00	15.00
50	25.00	25.00
55	30.00	30.00
60	35.00	35.00

All values in km/h

Maximum relative Impact Speed (km/h) for N₁ vehicles⁵

Relative Speed (km/h)	Stationary/Moving	
	Maximum mass	Mass in running order
10	0.00	0.00
15	0.00	0.00
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00
32	0.00	0.00

⁴ For relative speeds between the listed values (e.g. 53 km/h), the maximum relative impact speed (i.e. 30/30 km/h) assigned to the next higher relative speed (i.e. 55 km/h) shall apply. For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

⁵ For relative speeds between the listed values (e.g. 53 km/h), the maximum relative impact speed (i.e. 35/30 km/h) assigned to the next higher relative speed (i.e. 55 km/h) shall apply. For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

35	0.00	0.00
38	0.00	0.00
40	10.00	0.00
42	15.00	0.00
45	20.00	15.00
50	30.00	25.00
55	35.00	30.00
60	40.00	35.00

All values in km/h

5.2.2. Car to pedestrian scenario

5.2.2.1. Collision warning

When the AEBS has detected the possibility of a collision with a pedestrian crossing the road at a constant speed of 5 km/h (within the conditions specified in paragraph 5.2.2.4.) a collision warning shall be provided as specified in paragraph 5.5.1. and shall be provided no later than the start of emergency braking intervention.

The collision warning may be aborted if the conditions prevailing a collision are no longer present.

5.2.2.2. Emergency braking

When the system has detected the possibility of an imminent collision, there shall be a braking demand of at least 5.0 m/s^2 to the service braking system of the vehicle. This does not prohibit higher deceleration demand values than 5 m/s^2 during the collision warning for very short durations, e.g. as haptic warning to stimulate the driver's attention.

The emergency braking may be aborted or the deceleration demand may be reduced below the threshold above (as relevant), if the conditions prevailing a collision are no longer present or the risk of a collision has decreased.

This shall be tested in accordance with paragraph 6.6. of this Regulation.

5.2.2.3. Speed range

The system shall be active at least within the vehicle speed range between 20 km/h and 60 km/h and at all vehicle load conditions, unless deactivated as per paragraph 5.4.

5.2.2.4. Speed reduction by braking demand

In absence of driver's input which would lead to interruption according to paragraph 5.3.2., the AEBS shall be able to achieve an impact speed that is less or equal to the maximum relative impact speed as shown in the following table, provided:

- (a) Pedestrians are unobstructed and perpendicularly crossing with a lateral speed component of not more than 5 km/h;
- (b) Vehicle external influences allow for the required deceleration, i.e.:
 - (i) The road is flat, horizontal and dry affording good adhesion;
 - (ii) The weather conditions do not affect the dynamic performance of the vehicle (e.g. no storm, not below 0°C);
- (c) The vehicle state itself allows for the required deceleration, e.g.:

- (i) The tyres in an appropriate state and properly inflated;
- (ii) The brakes are properly operational (brake temperature, pads condition etc.);
- (iii) There is no severe uneven load distribution;
- (iv) No trailer is coupled to the motor vehicle and the mass of the motor vehicle is between maximum mass and mass in running order conditions;
- (d) There are no external influences affecting the physical sensing capabilities, i.e.:
 - (i) The ambient illumination conditions are at least 2000 Lux and there is no extreme blinding of the sensors (e.g. direct blinding sunlight, highly RADAR-reflective environment);
 - (ii) There are no significant weather conditions affecting the sensing capabilities of the vehicle (e.g. heavy rain, dense fog, snow, dirt);
 - (iii) There are no overhead obstructions close to the vehicle;
- (e) The situation is unambiguous, i.e.:
 - (i) There are not multiple pedestrians crossing in front of the vehicle.
 - (ii) The silhouette of the pedestrian and the type of movement relate to a human being.
 - (iii) The anticipated impact point is displaced by not more than 0.2 m compared to the vehicle longitudinal centre plane.
 - (iv) The direction of travel is straight with no curve, and the vehicle is not turning at an intersection and following its lane.
 - (v) There are no multiple objects close by to the pedestrian and an unambiguous object separation is given.

When conditions deviate from those listed above, the system shall not deactivate or unreasonably switch the control strategy. This shall be demonstrated by the manufacturer in accordance with Annex 3 of this Regulation and, if deemed justified, may be followed by testing by the Technical Service in conditions deviating from those listed above or those in paragraph 6. The rationale for and the results of this verification testing shall be appended to the test report

Maximum Impact Speed (km/h) for M₁⁶

<i>Subject vehicle speed (km/h)</i>	<i>Maximum mass</i>	<i>Mass in running order</i>
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00

⁶ For relative speeds between the listed values (e.g. 53 km/h), the maximum relative impact speed (i.e. 30/30 km/h) assigned to the next higher relative speed (i.e. 55 km/h) shall apply. For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

35	0.00	0.00
40	0.00	0.00
42	10.00	0.00
45	15.00	15.00
50	25.00	25.00
55	30.00	30.00
60	35.00	35.00

All values in km/h

Maximum Impact Speed (km/h) for N₁ vehicles⁷

<i>Subject vehicle speed (km/h)</i>	<i>Maximum mass</i>	<i>Mass in running order</i>
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00
35	0.00	0.00
38	0.00	0.00
40	10.00	0.00
42	15.00	0.00
45	20.00	15.00
50	30.00	25.00
55	35.00	30.00
60	40.00	35.00

All values in km/h

5.2.3. Car to bicycle scenario

5.2.3.1. Collision warning

When the AEBS has detected the possibility of a collision with a bicycle crossing the road at a constant speed of 15 km/h (within the conditions specified in paragraph 5.2.3.4.) a collision warning shall be provided as specified in paragraph 5.5.1. and shall be provided no later than the start of emergency braking intervention.

The collision warning may be aborted if the conditions prevailing a collision are no longer present.

5.2.3.2. Emergency braking

When the system has detected the possibility of an imminent collision, there shall be a braking demand of at least 5.0 m/s² to the service braking system of the vehicle. This does not prohibit higher deceleration demand values than

⁷ For subject vehicle speeds between the listed values (e.g. 53 km/h), the maximum impact speed (i.e. 35/30 km/h) assigned to the next higher subject vehicle speed (i.e. 55 km/h) shall apply. For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

5 m/s² during the collision warning for very short durations, e.g. as haptic warning to stimulate the driver's attention.

The emergency braking may be aborted or the deceleration demand may be reduced below the threshold above (as relevant), if the conditions prevailing a collision are no longer present or the risk of a collision has decreased.

This shall be tested in accordance with paragraph 6.7. of this Regulation.

5.2.3.3. Speed range

The system shall be active at least within the vehicle speed range between 20 km/h and 60 km/h and at all vehicle load conditions., unless deactivated as per paragraph 5.4.

5.2.3.4. Speed reduction by braking demand

In absence of driver's input which would lead to interruption according to paragraph 5.3.2., the AEBS shall be able to achieve an impact speed that is less or equal to the maximum relative impact speed as shown in the following table, provided:

- (a) Cyclists are unobstructed and perpendicularly crossing with constant speeds between 10 and 15 km/h;
- (b) Vehicle external influences allow for the required deceleration, i.e.:
 - (i) The road is flat, horizontal and dry affording good adhesion;
 - (ii) The weather conditions do not affect the dynamic performance of the vehicle (e.g. no storm, not below 0°C);
- (c) The vehicle state itself allows for the required deceleration, e.g.:
 - (i) The tyres in an appropriate state and properly inflated;
 - (ii) The brakes are properly operational (brake temperature, pads condition etc.);
 - (iii) There is no severe uneven load distribution;
 - (iv) No trailer is coupled to the motor vehicle and the mass of the motor vehicle is between maximum mass and mass in running order conditions;
- (d) There are no external influences affecting the physical sensing capabilities, i.e.:
 - (i) The ambient illumination conditions are at least 2000 Lux and there is no extreme blinding of the sensors (e.g. direct blinding sunlight, highly RADAR-reflective environment);
 - (ii) There are no significant weather conditions affecting the sensing capabilities of the vehicle (e.g. heavy rain, dense fog, snow, dirt);
 - (iii) There are no overhead obstructions close to the vehicle;
- (e) The situation is unambiguous, i.e.:
 - (i) There are not multiple cyclists crossing in front of the vehicle.

- (ii) The silhouette of the cyclist and the type of movement relate to a human being.
- (iii) The anticipated impact point of the crankshaft of the bicycle is displaced by not more than 0.2 m compared to the vehicle longitudinal centre plane.
- (iv) The direction of travel is straight with no curve, and the vehicle is not turning at an intersection and following its lane.
- (v) There are no multiple objects close to the cyclist and an unambiguous object separation is given.

When conditions deviate from those listed above, the system shall not deactivate or unreasonably switch the control strategy. This shall be demonstrated by the manufacturer in accordance with Annex 3 of this Regulation and, if deemed justified, may be followed by testing by the Technical Service in conditions deviating from those listed above or those in paragraph 6. The rationale for and the results of this verification testing shall be appended to the test report

Maximum Impact Speed (km/h) for M₁⁸

<i>Subject vehicle speed (km/h)</i>	<i>Maximum mass</i>	<i>Mass in running order</i>
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00
35	0.00	0.00
38	0.00	0.00
40	10.00	0.00
45	25.00	25.00
50	30.00	30.00
55	35.00	35.00
60	40.00	40.00

All values in km/h

Maximum Impact Speed (km/h) for N₁⁹

<i>Subject vehicle speed (km/h)</i>	<i>Maximum mass</i>	<i>Mass in running order</i>
20	0.00	0.00
25	0.00	0.00
30	0.00	0.00
35	0.00	0.00
36	0.00	0.00
38	15.00	0.00

⁸ For subject vehicle speeds between the listed values (e.g. 53 km/h), the maximum relative impact speed (i.e. 35/35 km/h) assigned to the next higher relative speed (i.e. 55 km/h) shall apply.

For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

⁹ For subject vehicle speeds between the listed values (e.g. 53 km/h), the maximum relative impact speed (i.e. 40/35 km/h) assigned to the next higher relative speed (i.e. 55 km/h) shall apply.

For masses above the mass in running order, the maximum relative impact speed assigned to the maximum mass shall apply.

40	25.00	0.00
45	30.00	25.00
50	35.00	30.00
55	40.00	35.00
60	45.00	40.00

All values in km/h

5.3. Interruption by the Driver

5.3.1. The AEBS shall provide the means for the driver to interrupt the collision warning and the emergency braking.

5.3.2. In both cases above, this interruption may be initiated by any positive action (e.g. kick-down, operating the direction indicator control) that indicates that the driver is aware of the emergency situation. The vehicle manufacturer shall provide a list of these positive actions to the technical service at the time of type approval and it shall be annexed to the test report.

5.4. Deactivation

5.4.1. When a vehicle is equipped with a means to manually deactivate the AEBS function, the following conditions shall apply as appropriate:

5.4.1.1 The AEBS function shall be automatically reinstated at each initiation of the powertrain¹⁰. A new engine start (or run cycle) which is performed automatically, e.g. the operation of a stop/start system, shall not be considered an “initiation of the powertrain” wherever that term is used in this Regulation.

5.4.1.2. The AEBS control shall be designed in such a way that manual deactivation shall not be possible with less than two deliberate actions.

5.4.1.3. The AEBS control shall be installed so as to comply with the relevant requirements and transitional provisions of UN Regulation No. 121 in its 01 series of amendments or any later series of amendments.

5.4.1.4. It shall not be possible to manually deactivate the AEBS at a speed above 10 km/h.

5.4.2. When the vehicle is equipped with a means to automatically deactivate the AEBS function, for instance in situations such as off-road use, being towed, being operated on a dynamometer, being operated in a washing plant, the following conditions shall apply as appropriate:

5.4.2.1. The vehicle manufacturer shall provide a list of situations and corresponding criteria where the AEBS function is automatically deactivated to the technical service at the time of type approval and it shall be annexed to the test report.

5.4.2.2. The AEBS function shall be automatically reactivated as soon as the conditions that led to the automatic deactivation are not present anymore.

5.4.2.3. Where automatic deactivation of the AEBS function is a consequence of the driver manually switching off the ESC function of the vehicle, this deactivation of the AEBS shall require at least two deliberate actions by the driver.

5.4.3. A constant optical warning signal shall inform the driver that the AEBS function has been deactivated. The yellow warning signal specified in paragraph 5.5.4. below may be used for this purpose.

5.4.4. While automated driving functions are in longitudinal control of the vehicle (e.g. ALKS is active) the AEBS function may be suspended or its control

¹⁰ As defined in Mutual Resolution No. 2 (M.R.2) of the 1958 and the 1998 Agreements containing vehicle propulsion system definitions, see document ECE/TRANS/WP.29/1121.

strategies (i.e. braking demand, warning timing) adapted without indication to the driver, as long as it remains ensured that the vehicle provides at least the same collision avoidance capabilities as the AEBS function during manual operation.

5.5. Warning Indication

5.5.1. The collision warning referred to in paragraphs 5.2.1.1., 5.2.2.1. and 5.2.3.1. shall be provided by at least two modes selected from acoustic, haptic or optical.

5.5.2. A description of the warning indication and the sequence in which the collision warning signals are presented to the driver shall be provided by the vehicle manufacturer at the time of type-approval and recorded in the test report.

5.5.3. Where an optical means is used as part of the collision warning, the optical signal may be the flashing of the failure warning signal specified in paragraph 5.5.4.

5.5.4. The failure warning referred to in paragraph 5.1.4.1. shall be a constant yellow optical warning signal.

5.5.5. Each AEBS optical warning signal shall be activated either when the ignition (start) switch is turned to the "on" (run) position or when the ignition (start) switch is in a position between the "on" (run) and "start" position that is designated by the manufacturer as a check position (initial system (power-on)). This requirement does not apply to warning signals shown in a common space.

5.5.6. The optical warning signals shall be visible even by daylight; the satisfactory condition of the signals must be easily verifiable by the driver from the driver's seat.

5.5.7. When the driver is provided with an optical warning signal to indicate that the AEBS is temporarily not available, for example due to inclement weather conditions, the signal shall be constant. The failure warning signal specified in paragraph 5.5.4. above may be used for this purpose.

5.6. Provisions for the Periodic Technical Inspection

5.6.1. At a Periodic Technical Inspection, it shall be possible to confirm the correct operational status of the AEBS by a visible observation of the failure warning signal status, following a "power-ON" and any bulb check.

In the case of the failure warning signal being in a common space, the common space must be observed to be functional prior to the failure warning signal status check.

5.6.2. At the time of type approval, the means to protect against simple unauthorised modification of the operation of the failure warning signal chosen by the manufacturer shall be confidentially outlined.

Alternatively, this protection requirement is fulfilled when a secondary means of checking the correct operational status of the AEBS is available.

6. Test procedure

6.1. Test Conditions

6.1.1. Test surface

- 6.1.1.1. The test shall be performed on a flat, dry, concrete or asphalt, road affording good adhesion.
- 6.1.1.2. The test surface shall have a consistent slope between level and 1 per cent.
- 6.1.2. The ambient temperature shall be between 0°C and 45°C.
- 6.1.3. The horizontal visibility range shall allow the target to be observed throughout the test.
- 6.1.4. The tests shall be performed when there is no wind liable to affect the results.
- 6.1.5. Natural ambient illumination must be homogeneous in the test area and in excess of 1000 lux in the case of car to car scenario as stipulated in paragraph 5.2.1. and of 2000 lux in the case of car to pedestrian scenario as stipulated in paragraph 5.2.2. and of 2000 lux in the case of car to bicycle scenario as stipulated in paragraph 5.2.3. It should be ensured that testing is not performed whilst driving towards, or away from the sun at a low angle.
- 6.1.6. At the request of the manufacturer and with the agreement of the Technical Service tests may be conducted under deviating test conditions (suboptimal conditions, e.g. on a not dry surface; below the specified minimum ambient temperature), whilst the performance requirements are still to be met.
- 6.2. Vehicle Conditions
 - 6.2.1. Test mass

The vehicle shall be tested:

 - (a) At the mass in running order with an additional mass of maximum 125 kg where this additional mass includes the measuring equipment and a possible second person who is responsible for noting the results in order to demonstrate compliance with the requirements referring to the mass in running order, and
 - (b) At the maximum mass

The load distribution shall be according to the manufacturer's recommendation and be annexed to the test report. No alteration shall be made once the test procedure has begun.

During the series of test runs, the fuel level may decrease but shall never fall below 50 per cent.
 - 6.2.2. Pre-Test Conditioning
 - 6.2.2.1. If requested by the vehicle manufacturer:
 - (a) The vehicle can be driven a maximum of 100 km on a mixture of urban and rural roads with other traffic and roadside furniture to initialise the sensor system.
 - (b) The vehicle can undergo a sequence of brake activations in order to ensure the service brake system is bedded in prior to the test.
 - (c) The average temperature of the service brakes on the hottest axle of the vehicle, measured inside the brake linings or on the braking path of the disc or drum, is between 65 and 100°C prior to each test run.
 - 6.2.2.2. Details of the pre-test condition strategy requested by the vehicle manufacturer shall be identified and recorded in the vehicle type approval documentation.

- 6.2.3. The mounted tyres shall be identified and recorded in the vehicle type approval documentation.
- 6.2.4. The vehicle may be fitted with protective equipment that does not affect the results of the tests."
- 6.3. Test Targets
- 6.3.1. The target used for the vehicle detection tests shall be a regular high-volume series production passenger car of Category M1 or alternatively a "soft target" representative of a passenger vehicle in terms of its identification characteristics applicable to the sensor system of the AEBS under test according to ISO 19206-3:2021. The reference point for the location of the vehicle shall be the most rearward point on the centreline of the vehicle.
- 6.3.2. The target used for the pedestrian detection tests shall be a child "articulated soft target" and be representative of the human attributes applicable to the sensor system of the AEBS under test according to ISO 19206-2:2018.
- 6.3.3. The targets used for the bicycle detection tests shall be a "soft target" and be representative of the bicycle with an adult cyclist attributes applicable to the sensor system of the AEBS under test according to ISO 19206-4:2020.
- 6.3.4. Details that enable the target(s) to be specifically identified and reproduced shall be recorded in the vehicle type approval documentation.
- 6.4. Warning and Activation Test with a Stationary Vehicle Target
- The subject vehicle shall approach the stationary target in a straight line for at least two seconds prior to the functional part of the test with a subject vehicle to target centreline offset of not more than 0.2 m.
- Tests shall be conducted with a vehicle travelling at speeds shown in tables below for respectively M₁ and N₁ Categories. If this is deemed justified, the technical service may test any other speeds listed in the tables in paragraph 5.2.1.4. and within the prescribed speed range as defined in paragraph 5.2.1.3.

Subject vehicle test speed for M₁ category in stationary target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
40	42	+0/-2
60	60	+0/-2

All values in km/h

Subject vehicle test speed for N₁ category in stationary target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
38	42	+0/-2
60	60	+0/-2

All values in km/h

The functional part of the test shall start with:

- The subject vehicle travelling at the required test speed within the tolerances and within the lateral offset prescribed in this paragraph, and
- A distance corresponding to a Time To Collision (TTC) of at least 4 seconds from the target.

The tolerances shall be respected between the start of the functional part of the test and the system intervention..

6.5. Warning and Activation Test with a Moving Vehicle Target

The subject vehicle and the moving target shall travel in a straight line, in the same direction, for at least two seconds prior to the functional part of the test. with a subject vehicle to target centreline offset of not more than 0.2m.

Tests shall be conducted with a vehicle travelling at speeds shown in tables below for respectively M₁ and N₁ categories and target travelling at 20 km/h (with a tolerance of +0/-2 km/h for the target vehicles). If this is deemed justified, the Technical Service may test any other speeds for subject vehicle and target vehicle within the speed range as defined in paragraph 5.2.1.3.

Subject vehicle test speed for M₁ category in moving target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
30	30	+2/-0
60	60	+0/-2

All values in km/h

Subject vehicle test speed for N₁ category in moving target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
30	30	+2/-0
58	60	+0/-2

All values in km/h

The functional part of the test shall start with:

- (a) The subject vehicle travelling at the required test speed within the tolerances and within the lateral offset prescribed in this paragraph, and
- (b) A distance corresponding to a TTC of at least 4 seconds from the target.

The tolerances shall be respected between the start of the functional part of the test and the system intervention.

6.6. Warning and Activation Test with a Pedestrian Target

- 6.6.1. The subject vehicle shall approach the impact point with the pedestrian target in a straight line for at least two seconds prior to the functional part of the test with an anticipated subject vehicle to impact point centreline offset of not more than 0.1 m.

The functional part of the test shall start with:

- (a) The subject vehicle travelling at the required test speed within the tolerances and within the lateral offset prescribed in this paragraph, and
- (b) A distance corresponding to a Time To Collision (TTC) of at least 4 seconds from the target.

The tolerances shall be respected between the start of the functional part of the test and the system intervention.

The pedestrian target shall travel in a straight line perpendicular to the subject vehicle's direction of travel at a constant speed of 5 km/h $\pm$ 0.2 km/h, starting not before the functional part of the test has started. The pedestrian target's positioning shall be coordinated with the subject vehicle in such a way that the impact point of the pedestrian target on the front of the subject vehicle is on

the longitudinal centreline of the subject vehicle, with a tolerance of not more than 0.1 m, if the subject vehicle would remain at the prescribed test speed throughout the functional part of the test and does not brake.

Tests shall be conducted with a vehicle travelling at speeds shown in the tables below for respectively M₁ and N₁ categories. If this is deemed justified, the Technical Service may test any other speeds listed in the table in paragraph 5.2.2.4, and within the prescribed speed range as defined in paragraph 5.2.2.3.

Subject vehicle test speed for M₁ category in pedestrian target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
40	42	+0/-2
60	60	+0/-2

All values in km/h

Subject vehicle test speed for N₁ category in pedestrian target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
38	42	+0/-2
60	60	+0/-2

All values in km/h

The test prescribed above shall be carried out with a child pedestrian "soft target" defined in 6.3.2.

6.6.2. The assessment of the impact speed shall be based on the actual contact point between the target and the vehicle, taking into account the vehicle shape without additional protective equipment as permitted per paragraph 6.2.4.

6.7. Warning and Activation Test with a Bicycle Target

6.7.1. The subject vehicle shall approach the impact point with the bicycle target in a straight line for at least two seconds prior to the functional part of the test with an anticipated subject vehicle to crankshaft of the bicycle impact point centreline offset of not more than 0.1 m.

The functional part of the test shall start when the subject vehicle is travelling at a constant speed and is at a distance corresponding to a TTC of at least 4 seconds from the collision point.

The bicycle target shall travel in a straight line perpendicular to the subject vehicle's direction of travel at a constant speed of 15 km/h +0/-1 km/h, starting not before the functional part of the test has started. During the acceleration phase of the bicycle prior to the functional part of the test the bicycle target shall be obstructed. The bicycle target's positioning shall be coordinated with the subject vehicle in such a way that the impact point of the bicycle target on the front of the subject vehicle is on the longitudinal centreline of the subject vehicle, with a tolerance of not more than 0.1 m, if the subject vehicle would remain at the prescribed test speed throughout the functional part of the test and does not brake.

Tests shall be conducted with a vehicle travelling at speeds shown in tables below for respectively M₁ and N₁ Categories. If this is deemed justified, the Technical Service may test any other speeds listed in the table in paragraph 5.2.3.4, and within the prescribed speed range as defined in paragraph 5.2.3.3.

Subject vehicle test speed for M₁ category in bicycle target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
38	40	+0/-2
60	60	+0/-2

All values in km/h

Subject vehicle test speed for N₁ category in bicycle target scenario

<i>Maximum mass</i>	<i>Mass in running order</i>	<i>Tolerance</i>
20	20	+2/-0
36	40	+0/-2
60	60	+0/-2

All values in km/h

From the start of the functional part until the subject vehicle has avoided the collision or the subject vehicle has passed the impact point with the bicycle target there shall be no adjustment to any control of the subject vehicle by the driver other than slight adjustments to the steering control to counteract any drifting.

The test prescribed above shall be carried out with a bicycle "soft target" defined in paragraph 6.3.3.

The functional part of the test shall start with

- (a) The subject vehicle travelling at the required test speed within the tolerances and within the lateral offset prescribed in this paragraph,
- (b) The bicycle target travelling at the required test speed within the tolerances specified in this paragraph and
- (c) A distance corresponding to a TTC of at least 4 seconds from the target.

The tolerances shall be respected between the start of the functional part of the test and the system intervention.

- 6.7.2. The assessment of the impact speed shall be based on the actual contact point between the target and the vehicle, taking into account the vehicle shape.

6.8. Failure Detection Test

- 6.8.1 Simulate an electrical failure, for example, by disconnecting the power source to any AEBS component or disconnecting any electrical connection between AEBS components. When simulating an AEBS failure, neither the electrical connections for the driver warning signal of paragraph 5.5.4. above nor the optional manual AEBS deactivation control of paragraph 5.4.1. shall be disconnected.

- 6.8.2. The failure warning signal mentioned in paragraph 5.5.4. above shall be activated and remain activated not later than 10 s after the vehicle has been driven at a speed greater than 10 km/h and be reactivated immediately after a subsequent ignition "off" ignition "on" cycle with the vehicle stationary as long as the simulated failure exists.

6.9. Deactivation Test

- 6.9.1. For vehicles equipped with means to manually deactivate the AEBS, turn the ignition (start) switch to the "on" (run) position and deactivate the AEBS. The warning signal mentioned in paragraph 5.4.3. above shall be activated. Turn

the ignition (start) switch to the "off" position. Again, turn the ignition (start) switch to the "on" (run) position and verify that the previously activated warning signal is not reactivated, thereby indicating that the AEBS has been reinstated as specified in paragraph 5.4.1. above. If the ignition system is activated by means of a "key", the above requirement shall be fulfilled without removing the key.

- 6.10. Robustness of the system
 - 6.10.1. Any of the above test scenarios, where a scenario describes one test setup at one subject vehicle speed at one load condition of one category (Car to Car, Car to Pedestrian, Car to Bicycle), shall be performed two times. If one of the two test runs fails to meet the required performance, the test may be repeated once. A test scenario shall be accounted as passed if the required performance is met in two test runs. The number of failed tests runs within one category shall not exceed:
 - (a) 10.0 per cent of the performed test runs for the Car to Car tests;
 - (b) 10.0 per cent of the performed test runs for the Car to Pedestrian tests; and
 - (c) 20.0 per cent of the performed test runs for the Car to Bicycle tests.
 - 6.10.2. The root cause of any failed test run shall be analyzed together with the Technical Service and annexed to the test report. If the root cause cannot be linked to a deviation in the test setup, the technical service may test any other speeds within the speed range as defined in paragraphs 5.2.1.3., 5.2.1.4., 5.2.2.3., 5.2.2.4., 5.2.3.3. or 5.2.3.4. as relevant.
 - 6.10.3. During the assessment as per Annex 3, the manufacturer shall demonstrate, via appropriate documentation, that the system is capable of reliably delivering the required performances.
- 6.11. Virtual testing of dynamic tests
 - 6.11.1. Virtual testing may be used by request of the vehicle manufacturer as an alternative for some of the tests described in paragraphs 6.4. to 6.6. The virtual testing shall be verified and validated according to Annex 4 and used in accordance with Annex 4.
 - 6.11.2. Virtual testing may be used in the evaluation of the warning and activation tests in accordance with paragraph 1.8. of Schedule 3 and Schedule 8 of Revision 3 of the 1958 Agreement.
 - 6.11.3. In order to demonstrate that the complete physical system can reliably deliver the required performance, at least 30 per cent* of required tests shall be performed physically including at least one test of each scenario variant described in paragraphs 6.4 to 6.6 relevant for the approval. The tests to be performed shall be agreed between the manufacturer and Type Approval Authority or its Technical Service. Those tests already performed as part of the model validation, and corresponding to the vehicle type approval, can be considered as part of the 30 per cent of required tests.
 - 6.11.3.1 Notwithstanding paragraph 6.11.3, in the case of modification of the vehicle type and extension of the approval according to paragraph 7, the proportion of physical tests required to demonstrate that the complete physical system

* The value of 30 per cent is considered as a first step for this regulation. It is expected that this value will be reduced in the future. Therefore, this value should be reviewed regularly in GRVA to take practical experience into account.

continues to reliably deliver the required performance, may be less than 30 per cent of the required tests and shall be agreed between the manufacturer and Type Approval Authority or its Technical Service.

- 6.11.4. Where virtual testing is used by the manufacturer, a separate report including at least the additional information specified in Annex 4 shall be annexed to the test report.

7. Modification of vehicle type and extension of approval

- 7.1. Every modification of the vehicle type as defined in paragraph 2.4. above shall be notified to the Type Approval Authority which approved the vehicle type. The Type Approval Authority may then either:
- 7.1.1. Consider that the modifications made do not have an adverse effect on the conditions of the granting of the approval and grant an extension of approval;
- 7.1.2. Consider that the modifications made affect the conditions of the granting of the approval and require further tests or additional checks before granting an extension of approval.
- 7.2. Confirmation or refusal of approval, specifying the alterations, shall be communicated by the procedure specified in paragraph 4.3. above to the Contracting Parties to the Agreement which apply this Regulation.
- 7.3. The Type Approval Authority shall inform the other Contracting Parties of the extension by means of the communication form which appears in Annex 1 to this Regulation. It shall assign a serial number to each extension to be known as the extension number.

8. Conformity of production

- 8.1. Procedures concerning conformity of production shall comply with those set out in the 1958 Agreement, Schedule 1 (E/ECE/TRANS/505/Rev.3) and meet the following requirements:
- 8.2. A vehicle approved pursuant to this Regulation shall be so manufactured as to conform to the type approved by meeting the requirements of paragraph 5. above;
- 8.3. The Type Approval Authority which has granted approval may at any time verify the conformity of control methods applicable to each production unit. The normal frequency of such inspections shall be once every two years.

9. Penalties for non-conformity of production

- 9.1. The approval granted in respect of a vehicle type pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 8, above are not complied with.
- 9.2. If a Contracting Party withdraws an approval it had previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation by sending them a communication form conforming to the model in Annex 1 to this Regulation.

10. Production definitively discontinued

If the holder of the approval completely ceases to manufacture a type of vehicle approved in accordance with this Regulation, he shall so inform the Type Approval Authority which granted the approval, which in turn shall forthwith inform the other Contracting Parties to the Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

11. Names and addresses of the Technical Services responsible for conducting approval tests and of Type Approval Authorities

The Contracting Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat¹¹ the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval are to be sent.

12. Transitional provisions

12.1. Transitional provisions applicable to the 01 series of amendments

12.1.1. As from the official date of entry into force of the 01 series of amendments, no Contracting Party applying this Regulation shall refuse to grant or refuse to accept type approvals under this Regulation as amended by the 01 series of amendments.

12.1.2. As from 1 May 2024, Contracting Parties applying this Regulation shall not be obliged to accept type approvals to the original version of this Regulation, first issued after 1 May 2024.

12.1.3. Until 1 May 2026, Contracting Parties applying this Regulation shall accept type approvals to the original version of this Regulation, first issued before 1 May 2024.

12.1.4. As from 1 May 2026, Contracting Parties applying this Regulation shall not be obliged to accept type approvals issued to the original version of this Regulation.

12.1.5. Notwithstanding paragraph 12.1.4., Contracting Parties applying this Regulation shall continue to accept type approvals issued according to the original version of this Regulation, for vehicles which are not affected by the changes introduced by the 01 Series of amendments.

12.2. Transitional provisions applicable to the 02 series of amendments

12.2.1. As from the official date of entry into force of the 02 series of amendments, no Contracting Party applying this Regulation shall refuse to grant or refuse to accept type approvals under this Regulation as amended by the 02 series of amendments.

¹¹ The UNECE secretariats provides the online platform (“/343 Application”) for exchange of such information with the secretariat: <https://www.unece.org/trans/main/wp29/datasharing.html>

- 12.2.2. As from 1 May 2024, Contracting Parties applying this Regulation shall not be obliged to accept type approvals to the preceding series of amendments of this Regulation, first issued after 1 May 2024.
- 12.2.3. Until 1 July 2026, Contracting Parties applying this Regulation shall accept type approvals to the preceding series of this Regulation, first issued before 1 May 2024.
- 12.2.4. As from 1 July 2026, Contracting Parties applying this Regulation shall not be obliged to accept type approvals issued to the preceding series of this Regulation.
- 12.2.5. Notwithstanding paragraph 12.2.4., Contracting Parties applying this Regulation shall continue to accept type approvals issued according to the preceding series of amendments to this Regulation, for vehicles which are not affected by the changes introduced by the 02 series of amendments (i.e. car-to-car and/or car-to-pedestrian approvals are not affected by this new 02 series).
- 12.3. General transitional provisions
 - 12.3.1. Contracting Parties applying this Regulation may grant type approvals according to any preceding series of amendments to this Regulation or extensions thereof.
 - 12.3.2. Contracting Parties applying this Regulation shall continue to grant extensions of existing approvals to any preceding series of amendments to this Regulation.

Annex 1

Communication

(Maximum format: A4 (210 x 297 mm))



issued by : (Name of administration)

.....
.....
.....

Concerning: ² Approval granted
Approval extended
Approval refused
Approval withdrawn
Production definitively discontinued

of a type of vehicle with regard to the advanced emergency braking system pursuant to UN Regulation No. 152

Approval No.:

1. Trademark:
2. Type and trade name(s):
3. Name and address of manufacturer:
4. If applicable, name and address of manufacturer's representative:
5. Brief description of vehicle:
6. Date of submission of vehicle for approval:
7. Technical Service performing the approval tests:
8. Date of report issued by that Service:
9. Number of report issued by that Service:
10. Approval
 - 10.1. to car to car scenario granted/refused/extended/withdrawn:²
 - 10.2. to car to pedestrian scenario granted/refused/extended/withdrawn:²
 - 10.3. to car to bicycle scenario granted/refused/extended/withdrawn:²
11. Place:
12. Date:
13. Signature:
14. Annexed to this communication are the following documents, bearing the approval number indicated above:
15. Any remarks:


¹ Distinguishing number of the country which has granted/extended/refused/withdrawn an approval (see approval provisions in the Regulation).

² Strike out what does not apply.

Annex 2

Arrangements of approval marks

(see paragraphs 4.4. to 4.4.2. of this Regulation)

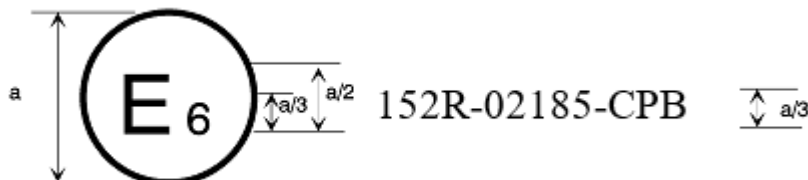

$a = 8 \text{ mm min}$

The above approval mark affixed to a vehicle shows that the vehicle type concerned has been approved in Belgium (E 6) with regard to the Advanced Emergency Braking Systems (AEBS) pursuant to UN Regulation No. 152 (marked with C for Car to Car, P for Car to Pedestrian, B for Car to Bicycle). The first two digits of the approval number indicate that the approval was granted in accordance with the requirements of UN Regulation No. 152as amended by the 02 series of amendments.

Annex 3

Special requirements to be applied to the safety aspects of electronic control systems

1. General

This annex defines the special requirements for documentation, fault strategy and verification with respect to the safety aspects of Complex Electronic Vehicle Control Systems (paragraph 2.4. below) as far as this Regulation is concerned.

This annex shall also apply to safety related functions identified in this Regulation which are controlled by electronic system(s) (paragraph 2.3.) as far as this Regulation is concerned.

This annex does not specify the performance criteria for "The System" but covers the methodology applied to the design process and the information which must be disclosed to the Technical Service, for type approval purposes.

This information shall show that "The System" respects, under non-fault and fault conditions, all the appropriate performance requirements specified elsewhere in this Regulation and that it is designed to operate in such a way that it does not induce safety critical risks.

2. Definitions

For the purposes of this annex,

- 2.1. *The System*" means an electronic control system or complex electronic control system that provides or forms part of the control transmission of a function to which this Regulation applies. This also includes any other system covered in the scope of this Regulation, as well as transmission links to or from other systems that are outside the scope of this Regulation, that acts on a function to which this Regulation applies."
- 2.2. *"Safety Concept"* is a description of the measures designed into the system, for example within the electronic units, so as to address system integrity and thereby ensure safe operation under fault and non-fault conditions, including in the event of an electrical failure. The possibility of a fall-back to partial operation or even to a back-up system for vital vehicle functions may be a part of the safety concept.
- 2.3. *"Electronic Control System"* means a combination of units, designed to co-operate in the production of the stated vehicle control function by electronic data processing. Such systems, often controlled by software, are built from discrete functional components such as sensors, electronic control units and actuators and connected by transmission links. They may include mechanical, electro-pneumatic or electro-hydraulic elements.
- 2.4. *"Complex Electronic Vehicle Control Systems"* are those electronic control systems in which a function controlled by an electronic system or the driver may be over-ridden by a higher-level electronic control system/function. A function which is over-ridden becomes part of the complex system, as well as any overriding system/function within the scope of this Regulation. The transmission links to and from overriding systems/function outside of the scope of this Regulation shall also be included.

- 2.5. *"Higher-Level Electronic Control"* systems/functions are those which employ additional processing and/or sensing provisions to modify vehicle behaviour by commanding variations in the function(s) of the vehicle control system. This allows complex systems to automatically change their objectives with a priority which depends on the sensed circumstances.
- 2.6. *"Units"* are the smallest divisions of system components which will be considered in this annex, since these combinations of components will be treated as single entities for purposes of identification, analysis or replacement.
- 2.7. *"Transmission links"* are the means used for inter-connecting distributed units for the purpose of conveying signals, operating data or an energy supply. This equipment is generally electrical but may, in some part, be mechanical, pneumatic or hydraulic.
- 2.8. *"Range of control"* refers to an output variable and defines the range over which the system is likely to exercise control.
- 2.9. *"Boundary of functional operation"* defines the boundaries of the external physical limits within which the system is able to maintain control.
- 2.10. *"Safety Related Function"* means a function of "The System" that is capable of changing the dynamic behaviour of the vehicle. "The System" may be capable of performing more than one safety related function.

3. Documentation

3.1. Requirements

The manufacturer shall provide a documentation package which gives access to the basic design of "The System" and the means by which it is linked to other vehicle systems or by which it directly controls output variables. The function(s) of "The System" and the safety concept, as laid down by the manufacturer, shall be explained. Documentation shall be brief, yet provide evidence that the design and development has had the benefit of expertise from all the system fields which are involved. For periodic technical inspections, the documentation shall describe how the current operational status of "The System" can be checked.

The Technical Service shall assess the documentation package to show that "The System":

- (a) Is designed to operate, under non-fault and fault conditions, in such a way that it does not induce safety critical risks;
- (b) Respects, under non-fault and fault conditions, all the appropriate performance requirements specified elsewhere in this Regulation; and,
- (c) Was developed according to the development process/method declared by the manufacturer.

3.1.1. Documentation shall be made available in two parts:

- (a) The formal documentation package for the approval, containing the material listed in paragraph 3. (with the exception of that of paragraph 3.4.4.) which shall be supplied to the Technical Service at the time of submission of the type approval application. This documentation package shall be used by the Technical Service as the basic reference for the verification process set out in paragraph 4. of this annex. The Technical Service shall ensure that this documentation package remains available for a period determined in agreement with the Approval Authority. This period shall be at least 10 years counted from the time when production of the vehicle is definitely discontinued.

- (b) Additional material and analysis data of paragraph 3.4.4. which shall be retained by the manufacturer, but made open for inspection at the time of type approval. The manufacturer shall ensure that this material and analysis data remains available for a period of 10 years counted from the time when production of the vehicle is definitely discontinued.
- 3.2. Description of the functions of "The System"

A description shall be provided which gives a simple explanation of all the control functions of "The System" and the methods employed to achieve the objectives, including a statement of the mechanism(s) by which control is exercised.

Any described function that can be over-ridden shall be identified and a further description of the changed rationale of the function's operation provided.
- 3.2.1. A list of all input and sensed variables shall be provided and the working range of these defined.
- 3.2.2. A list of all output variables which are controlled by "The System" shall be provided and an indication given, in each case, of whether the control is direct or via another vehicle system. The range of control (paragraph 2.8.) exercised on each such variable shall be defined.
- 3.2.3. Limits defining the boundaries of functional operation (paragraph 2.9.) shall be stated where appropriate to system performance.
- 3.3. System layout and schematics
- 3.3.1. Inventory of components.

A list shall be provided, collating all the units of "The System" and mentioning the other vehicle systems which are needed to achieve the control function in question.

An outline schematic showing these units in combination, shall be provided with both the equipment distribution and the interconnections made clear.
- 3.3.2. Functions of the units

The function of each unit of "The System" shall be outlined and the signals linking it with other units or with other vehicle systems shall be shown. This may be provided by a labelled block diagram or other schematic, or by a description aided by such a diagram.
- 3.3.3. Interconnections

Interconnections within "The System" shall be shown by a circuit diagram for the electric transmission links, by a piping diagram for pneumatic or hydraulic transmission equipment and by a simplified diagrammatic layout for mechanical linkages. The transmission links both to and from other systems shall also be shown
- 3.3.4. Signal flow, operating data and priorities

There shall be a clear correspondence between these transmission links and the signals and/or operating data carried between units. Priorities of signals and/or operating data on multiplexed data paths shall be stated wherever priority may be an issue affecting performance or safety as far as this Regulation is concerned.
- 3.3.5. Identification of units

Each unit shall be clearly and unambiguously identifiable (e.g. by marking for hardware and marking or software output for software content) to provide corresponding hardware and documentation association.

Where functions are combined within a single unit or indeed within a single computer, but shown in multiple blocks in the block diagram for clarity and ease of explanation, only a single hardware identification marking shall be used. The manufacturer shall, by the use of this identification, affirm that the equipment supplied conforms to the corresponding document.

- 3.3.5.1. The identification defines the hardware and software version and, where the latter changes such as to alter the function of the unit as far as this Regulation is concerned, this identification shall also be changed.

3.4. Safety concept of the manufacturer

- 3.4.1. The Manufacturer shall provide a statement which affirms that the strategy chosen to achieve "The System" objectives will not, under non-fault conditions, prejudice the safe operation of the vehicle.

- 3.4.2. In respect of software employed in "The System", the outline architecture shall be explained and the design methods and tools used shall be identified. The manufacturer shall show evidence of the means by which they determined the realisation of the system logic, during the design and development process.

- 3.4.3. The Manufacturer shall provide the Technical Service with an explanation of the design provisions built into "The System" so as to generate safe operation under fault conditions. Possible design provisions for failure in "The System" are for example:

- (a) Fall-back to operation using a partial system.
- (b) Change-over to a separate back-up system.
- (c) Removal of the high level function.

In case of a failure, the driver shall be warned for example by warning signal or message display. When the system is not deactivated by the driver, e.g. by turning the ignition (run) switch to "off", or by switching off that particular function if a special switch is provided for that purpose, the warning shall be present as long as the fault condition persists.

- 3.4.3.1. If the chosen provision selects a partial performance mode of operation under certain fault conditions, then these conditions shall be stated and the resulting limits of effectiveness defined.

- 3.4.3.2. If the chosen provision selects a second (back-up) means to realise the vehicle control system objective, the principles of the change-over mechanism, the logic and level of redundancy and any built in back-up checking features shall be explained and the resulting limits of back-up effectiveness defined.

- 3.4.3.3. If the chosen provision selects the removal of the Higher Level Function, all the corresponding output control signals associated with this function shall be inhibited, and in such a manner as to limit the transition disturbance.

- 3.4.4. The documentation shall be supported, by an analysis which shows, in overall terms, how the system will behave on the occurrence of any individual hazard or fault which will have a bearing on vehicle control performance or safety.

The chosen analytical approach(es) shall be established and maintained by the Manufacturer and shall be made open for inspection by the Technical Service at the time of the type approval.

The Technical Service shall perform an assessment of the application of the analytical approach(es). The audit shall include:

- (a) Inspection of the safety approach at the concept (vehicle) level with confirmation that it includes consideration of interactions with other

vehicle systems. This approach shall be based on a Hazard / Risk analysis appropriate to system safety.

- (b) Inspection of the safety approach at the system level. This approach shall be based on a Failure Mode and Effect Analysis (FMEA), a Fault Tree Analysis (FTA) or any similar process appropriate to system safety.
- (c) Inspection of the validation plans and results. This validation shall use, for example, Hardware in the Loop (HIL) testing, vehicle on-road operational testing, or any means appropriate for validation.

The assessment shall consist of checks of hazards and faults chosen by the Technical Service to establish that the manufacturer's explanation of the safety concept is understandable, logical and that the validation plans are suitable and have been completed.

The Technical Service may perform or may require to perform tests as specified in paragraph 4. to verify the safety concept.

3.4.4.1. This documentation shall itemize the parameters being monitored and shall set out, for each fault condition of the type defined in paragraph 3.4.4. of this annex, the warning signal to be given to the driver and/or to service/technical inspection personnel.

3.4.4.2. This documentation shall describe the measures in place to ensure the "The System" does not prejudice the safe operation of the vehicle when the performance of "The System" is affected by environmental conditions e.g. climatic, temperature, dust ingress, water ingress, ice packing.

4. Verification and test

4.1. The functional operation of "The System", as laid out in the documents required in paragraph 3., shall be tested as follows:

4.1.1. Verification of the function of "The System"

The Technical Service shall verify "The System" under non-fault conditions by testing a number of selected functions from those declared by the manufacturer in paragraph 3.2. above.

For complex electronic systems, these tests shall include scenarios whereby a declared function is overridden.

4.1.2. Verification of the safety concept of paragraph 3.4.

The reaction of "The System" shall be checked under the influence of a failure in any individual unit by applying corresponding output signals to electrical units or mechanical elements in order to simulate the effects of internal faults within the unit. The Technical Service shall conduct this check for at least one individual unit, but shall not check the reaction of "The System" to multiple simultaneous failures of individual units.

The Technical Service shall verify that these tests include aspects that may have an impact on vehicle controllability and user information (HMI aspects)."

4.1.2.1. The verification results shall correspond with the documented summary of the failure analysis, to a level of overall effect such that the safety concept and execution are confirmed as being adequate.

5. Reporting by Technical Service

Reporting of the assessment by the Technical Service shall be performed in such a manner that allows traceability, e.g. versions of documents inspected are coded and listed in the records of the Technical Service.

An example of a possible layout for the assessment form from the Technical Service to the Type Approval Authority is given in Appendix 1 to this Annex.

Annex 3 - Appendix 1

Model assessment form for electronic systems

Test report No:

1. Identification

1.1. Vehicle make:

1.2. Type:

1.3. Means of identification of type if marked on the vehicle:

1.4. Location of that marking:

1.5. Manufacturer's name and address:

1.6. If applicable, name and address of manufacturer's representative:

1.7. Manufacturer's formal documentation package:

Documentation reference No:

Date of original issue:

Date of latest update:

2. Test vehicle(s)/system(s) description

2.1. General description:

2.2. Description of all the control functions of "The System", and methods of operation: ..

2.3. Description of the components and diagrams of the interconnections within "The System":

3. Manufacturer's safety concept

3.1. Description of signal flow and operating data and their priorities:

3.2. Manufacturer's declaration:

The manufacturer(s) affirm(s) that the strategy chosen to achieve "The System", objectives will not, under non-fault conditions, prejudice the safe operation of the vehicle.

3.3. Software outline architecture and the design methods and tools used:

3.4. Explanation of design provisions built into "The System" under fault conditions:

3.5. Documented analyses of the behaviour of "The System" under individual hazard or fault conditions:

3.6. Description of the measures in place for environmental conditions:

3.7. Provisions for the periodic technical inspection of "The System":

3.8. Results of "The System" verification test, as per para. 4.1.1. of Annex 3 to UN Regulation No. 152:

3.9. Results of safety concept verification test, as per para. 4.1.2. of Annex 3 to UN Regulation No. 152:

3.10. Date of test:

- 3.11. This test has been carried out and the results reported in accordance with to UN Regulation No. 152 as last amended by the series of amendments.

Technical Service¹ carrying out the test

Signed:

Date:

- 3.12. Type Approval Authority¹

Signed:

Date:

- 3.13. Comments:

¹ To be signed by different persons even when the Technical Service and Type Approval Authority are the same or alternatively, a separate Type Approval Authority authorization is issued with the report.

Annex 3 - Appendix 2

False Reaction scenarios

The following scenarios shall be used to assess the system's strategies implemented in order to minimize the generation of false reactions. For each type of scenario the vehicle manufacturer shall explain the principle strategies implemented to ensure safety.

The manufacturer shall provide evidence (e.g. simulation results, real-world test data, track test data) of the system's behaviour in the described types of scenarios. The parameters described in subparagraph 2 of each scenario shall be used as guidance if the Technical Service deems a demonstration of the scenario necessary.

- (a) Definition of overlap ratio between the subject vehicle and the related vehicle

Overlap ratio between the subject vehicle and the related vehicle is calculated by the following formula.

$$R_{\text{overlap}} = L_{\text{overlap}} / W_{\text{vehicle}} * 100$$

Where:

R_{overlap} : Overlap ratio [%]

L_{overlap} : Amount of overlap between extended lines of the width of the subject vehicle and the related vehicle [m]

W_{vehicle} : Width of the subject vehicle [m] (sensors, devices for indirect vision, door handles and connections for tyre-pressure gauges are not included when measuring the width of the vehicle)

- (b) Definition of offset ratio between the subject vehicle and the stationary object

Offset ratio between the subject vehicle and the stationary object is calculated by the following formula.

$$R_{\text{offset}} = L_{\text{offset}} / (0.5 * W_{\text{vehicle}}) * 100$$

R_{offset} : Offset ratio [%]

L_{offset} : Amount of offset between the centre of the subject vehicle and the centre of the stationary object, and the direction of offset to the driver's seat side is defined as plus (+) [m]

W_{vehicle} : Width of the subject vehicle [m] (sensors, devices for indirect vision, door handles and connections for tyre-pressure gauges are not included when measuring the width of the vehicle)

Scenario 1

Left turn or Right turn at the intersection


- 1.1. In this scenario, the subject vehicle passes by a left turn or right turn in front of an oncoming vehicle that is stopped to make a left turn or right turn at an intersection.
- 1.2. An example of the detail scenario:

The subject vehicle drives at a speed of 30 km/h (with a tolerance of +0/-2 km/h) toward the intersection, and decelerates by braking to a speed of not less than 16 km/h at a point where the subject vehicle begins to steer left / right, and the Time To Collision (TTC) to the oncoming vehicle is not more than 2.8 seconds. When the subject vehicle turns left or right in the intersection, the speed is reduced to not less than 10 km/h, and then drives at a constant speed. The TTC to the oncoming vehicle is not more than 1.7 seconds at when the overlap ratio between the subject vehicle and the oncoming vehicle becomes 0 per cent.


Figure 1

Left turn or right turn at the intersection

(A) Driving on right side of the road

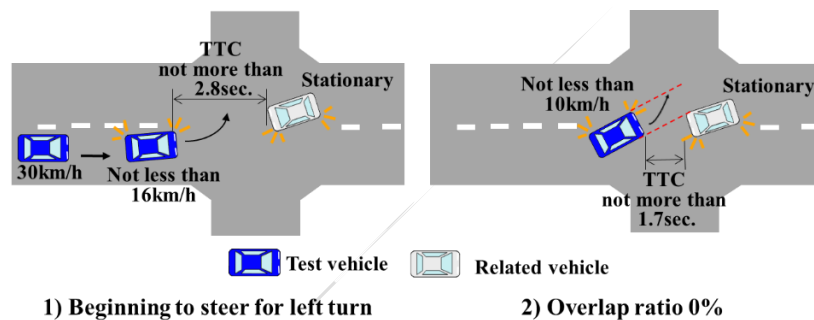

(B) Driving on left side of the road

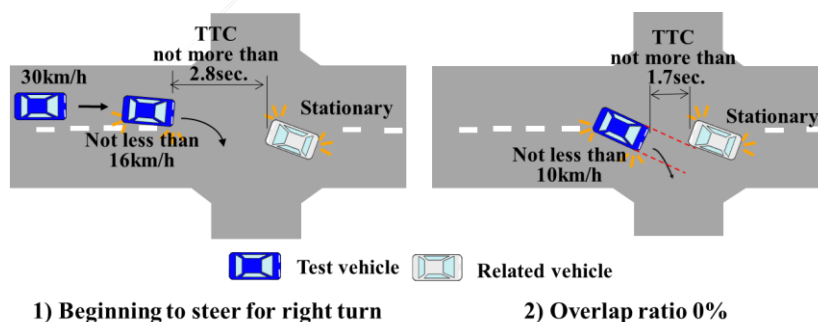

Scenario 2


Right turn or Left turn of a forward vehicle

- 2.1. In this scenario, the subject vehicle follows a forward vehicle. After that, the forward vehicle turns right or left at a corner, and the subject vehicle goes straight.
- 2.2. An example of the detail scenario:
- Both the forward vehicle and the subject vehicle drive at a speed of 40 km/h (with a tolerance of +0/-2 km/h) on the straight road. The forward vehicle decelerates by braking to a speed of 10 km/h (with a tolerance of +0/-2 km/h) in order to turn right or left at the corner, and the subject vehicle also decelerates by braking to keep appropriate distance with the forward vehicle. At when the forward vehicle begins to turn right or left, the speed of the subject vehicle is not less than 26 km/h and the TTC to the frontal vehicle is not more than 4.7 seconds. After that, the subject vehicle decelerates to a speed of not less than 20 km/h, and then drives at a constant speed. The TTC to the forward vehicle is not more than 2.5 seconds at when the overlap ratio between the subject vehicle and the forward vehicle becomes 0 per cent.


Figure 2

Right turn or left turn of a forward vehicle

(A) Driving on right side of the road

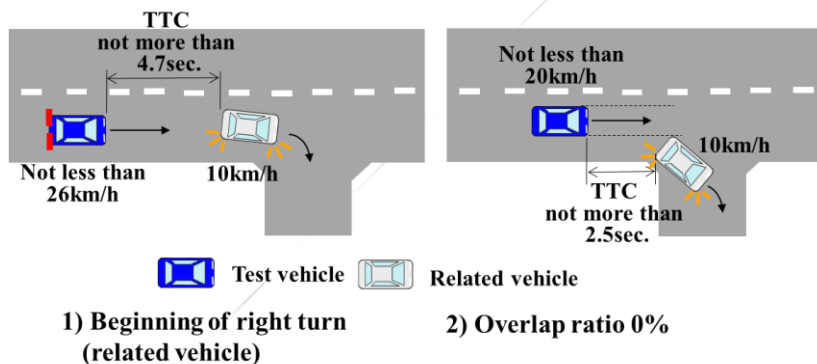

(B) Driving on left side of the road

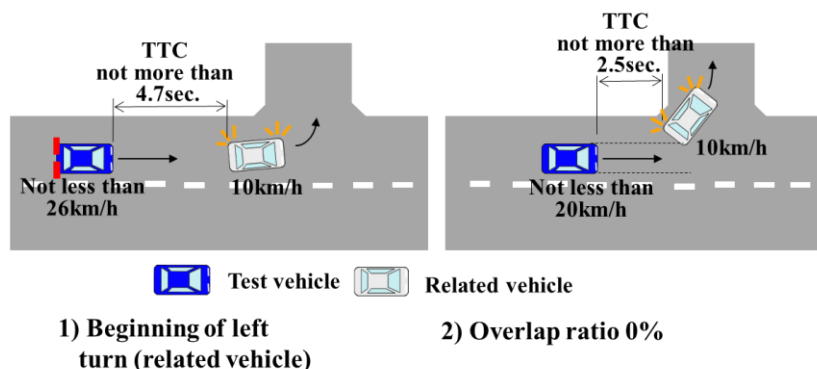

Scenario 3

Curved road with guard pipes and a stationary object

- 3.1. In this scenario, the subject vehicle drives a small radius curved road of which the guard pipes are constructed to the outer side, and a stationary vehicle (M₁ category), a stationary pedestrian target or a stationary bicycle target is positioned just outside of the guard pipes and where on the extension of the centre of the lane.


- 3.2. An example of the detail scenario:

The subject vehicle drives at a speed of 30 (with a tolerance of +0/-2 km/h) km/h toward the curve of which the radius is not more than 25 m at the outer side of the road, and decelerates by braking to a speed of not less than 22 km/h at a point where the subject vehicle enters the curve. The TTC to the stationary object is not more than 1.6 seconds at when the subject vehicle begins to turn in the curve. In the curve, the subject vehicle drives outer lane than the centre of the road. After that, the subject vehicle continue to turn in the curve at a constant speed of not less than 21 km/h. The TTC to the stationary object is not more than 1.1 second at when the overlap ratio between the subject vehicle and the stationary vehicle becomes 0 per cent, or at when the offset ratio between the subject vehicle and the centre of the stationary pedestrian target or the stationary bicycle target becomes -100 per cent.


Figure 3

Curved road with guard pipes and a stationary object

(A) Driving on right side of the road

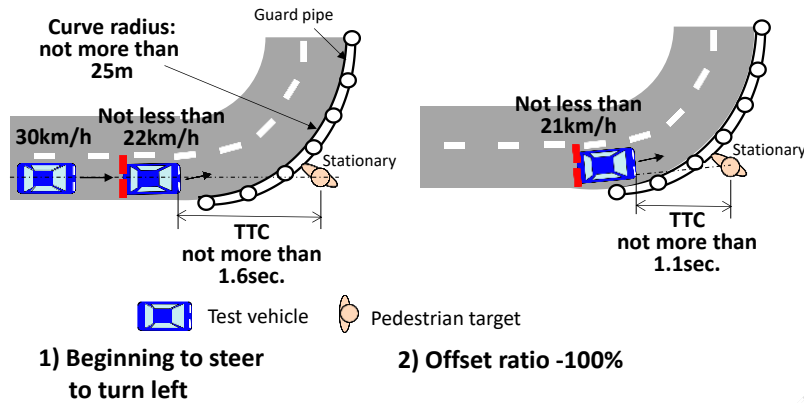

(B) Driving on left side of the road

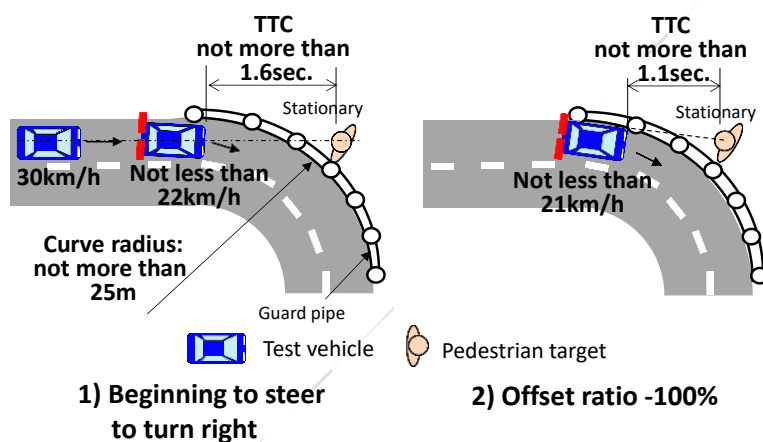

Scenario 4

Lane change due to road construction


- 4.1. In this scenario, the subject vehicle changes the lane in front of the signboard which is positioned in the centre of the lane and notifies the driver that the lane is reduced.
- 4.2. An example of the detail scenario:
The subject vehicle drives a straight road at a speed of 40 km/h (with a tolerance of +0/-2 km/h) and begins to steer in order to change the lane in front of the signboard which notifies reducing the lane. No other vehicles approach the subject vehicle. The TTC to the signboard is not more than 4.2 seconds at when the subject vehicle begins to steer. During changing the lane, the speed of the subject vehicle is constant, and the TTC to the signboard is not more

than 3.3 seconds at when the offset ratio between the subject vehicle and the centre of the signboard becomes -100 per cent.


Figure 4

Lane change due to road construction

(A) Driving on right side of the road

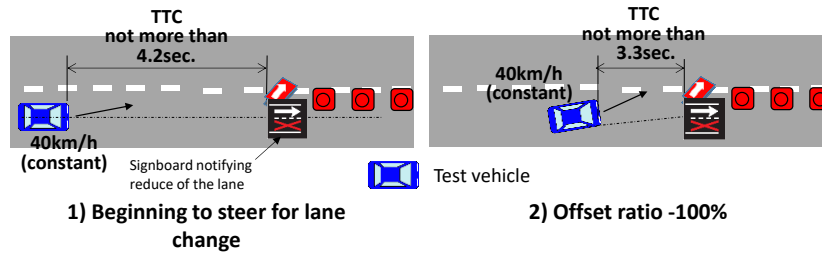

(B) Driving on left side of the road

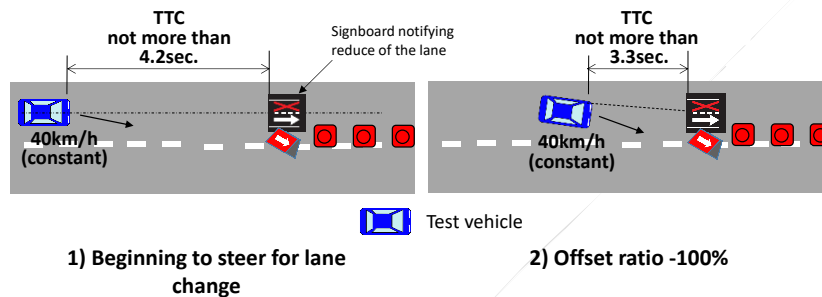

Annex 4

Virtual testing of dynamic tests

0. Introduction (for information only) This annex describes the method that can be used to consider virtual testing as an alternative to physical testing, based on the manufacturer request. This method is mainly based on two separate activities:
 - (a) Activity 1: The development, management, verification and validation of the toolchain; and,
 - (b) Activity 2: The use of virtual testing results to conduct testing required for approval process.
1. Definitions
 - 1.1 “*Virtual testing*” is the process of testing a system using one or more simulation models.
 - 1.2 “*Model*” is a description or representation of a system, entity, phenomenon, or process.
 - 1.3 “*Toolchain*” is the combination of simulation model implementations as tools that emulate a vehicle function.
 - 1.4 “*Validity domain*” is the domain of applicability of the toolchain.
2. Activity 1: The development, management, verification and validation of the toolchain
 - 2.1. General specifications
 - 2.1.1. Credibility of the toolchain that is used for the virtual testing shall be demonstrated by the vehicle manufacturer to the satisfaction of the Type Approval Authority or its Technical Service.

For this, the following five criteria shall be considered:

 - (a) Capability – what the toolchain can do, and what the associated risks are;
 - (b) Accuracy – how well the toolchain reproduces the target data recorded in physical tests;
 - (c) Correctness – how sound and robust are the data and the algorithms in the tools;
 - (d) Fit for Purpose – how suitable the toolchain is for the assessment (e.g. vehicle dynamic model, sensor model, system control model, environment model, scenario model, targets model, ...) within its validity domain;
 - (e) Usability – The training and experience, which is needed and the quality of the processes that manage the toolchain’s use.
 - 2.2. Development of the virtual testing method
 - 2.2.1. Developing and using the toolchain is the responsibility of the vehicle manufacturer. The toolchain shall reflect the vehicle, system and components that are to be tested.

- 2.3. Toolchain management

The following information shall be provided by the manufacturer to the Technical Service:
- 2.3.1 A description of the models and tools which constitute the toolchain and the method used to trace input data, parameters and output data back to the corresponding toolchain version.
- 2.3.2. The processes which ensure that the personnel developing, testing and validating the toolchain and its components have appropriate experience, expertise, and training and evidence that these processes are implemented and effective. If there are any activities not directly controlled by the manufacturer, there must be an explanation of measures taken to ensure confidence in the quality and integrity of these activities.
- 2.3.3. A description of the input parameters, along with any uncertainties in the model parameters, which have been used to validate the models included in the tools and toolchain. The manufacturer shall also provide documentation demonstrating that the data used to validate the models covers the intended scope and functionality of the toolchain.
- 2.3.4. A description of the overall approach to data management.
- 2.3.5. A description of the management activities which describe the modifications between toolchain releases, version control and the review processes to ensure those modifications result in a toolchain that is still suitable.
- 2.3.6. Description and analysis of toolchain and components
 - 2.3.6.1. All parts of the toolchain, tools and models shall be described by the manufacturer.
 - 2.3.6.2. The vehicle manufacturer shall define the validity domain on which the toolchain will be applicable and how the validity domain has been derived including any AEBS performance influencing factors, parameter ranges, assumptions, limitations and tolerances.
 - 2.3.6.3. The documentation shall include a description of the key performance indicators which will be assessed during validation, such as time to collision, remaining distance or impact speed.
 - 2.3.6.4. The documentation shall include a description of the accuracy requirements for the toolchain and its components, including comparison with physical tests.
 - 2.3.6.5. The documentation of the toolchain shall include assumptions, limitations, uncertainties and the necessary levels of fidelity.
 - 2.3.6.6. The manufacturer shall provide a description of the toolchain assessment methodology, including the impact of any errors and uncertainties on the results and the subsequent consequences for the compliance of the system with this regulation.
- 2.3.7. The manufacturer shall review the information produced in addressing the requirements of paragraph 2.3.6.2. and document any implications for the use of the toolchain.
- 2.4. Verification

- 2.4.1. The toolchain and its components shall be capable of accurately representing the relevant aspects of the physical AEBS that is being modelled.
- 2.4.2. The manufacturer shall provide documentation on the verification activity of the modelling that implements the AEBS function in the toolchain and its components. This shall include a description of the models, their implementation, how they represent the AEBS function and a description of the activities that have been performed to confirm that the models have been correctly implemented.
- 2.4.3. The manufacturer shall provide an estimation of the numerical errors affecting the toolchain and its components and analysis that the errors remain sufficiently bounded.
- 2.4.4. The manufacturer shall demonstrate the effect of variations of the model parameters on the output values and identification of the most critical parameters which will influence the results. This shall also include a robust calibration procedure for these parameters.
- 2.45. Validation
- 2.5.1 The vehicle manufacturer shall describe their overall approach to validation including performance measures and a validation strategy. The validation strategy shall be agreed by the Type Approval Authority or its Technical Service, including physical tests performed to demonstrate that the toolchain is an accurate representation of the physical system. The tests performed shall ensure a statistical comparison between physical and simulation results is possible.
- 2.5.2. The validation strategy shall be defined by the manufacturer and presented to the Type Approval Authority or its Technical Service for review and agreement.
- 2.5.3. The manufacturer shall demonstrate how the toolchain achieves the key performance indicators defined in paragraph 2.3.6.3. and accuracy requirements defined in paragraph 2.3.6.4. This shall include justification for the choice of key performance indicators and accuracy requirements, and what the criteria is for satisfying these indicators and requirements.
- 2.5.4. The manufacturer shall provide the list of validation scenarios. The manufacturer shall provide the parameter descriptions and accuracy requirements that were needed to perform the validation tests.
- 2.5.5. The manufacturer shall provide documentation describing the validation that was performed to establish the credibility of the toolchain. This shall include information related to the processes that were followed, physical tests that were performed and models and tools that were used.
- 2.5.6. The manufacturer shall provide documentation that demonstrates how they have characterised the uncertainty in the input data and evaluated the model parameters. The overall uncertainty of the results shall be quantified based on the toolchain structure and from the data and its flow through the toolchain. This uncertainty quantification shall allow estimates of the likely errors and the required safety margins that shall be applied to the results when the toolchain is used for virtual testing.
- 2.5.7. At the request of the Type Approval Authority or its Technical Service, in addition to the documentation provided by the vehicle manufacturer, additional

- confirmatory validation, which shall include physical tests, shall be performed or witnessed. These tests may be relevant to the entire toolchain, specific parts of the toolchain or any of its components.
- 2.5.8. The number of physical tests shall be defined in agreement between the manufacturer and the Type Approval Authority or its the Technical Service. They shall be sufficient to cover the validity domain specified by the vehicle manufacturer.
- 2.5.9. The methodology used to generate physical validation data, such as data recording equipment, data processing, calculation of scalar values shall be documented as part of the validation documentation.
3. Activity 2: The use of virtual testing results to conduct testing required for approval process
- 3.1. Compliance of the Advanced Emergency Braking System with the performance requirements as defined in paragraphs 5.2.1 to 5.2.2. of this Regulation may be demonstrated by the vehicle manufacturer to the Type Approval Authority or its Technical Service by making use of virtual testing of the dynamic maneuvers described in the paragraph(s) 6.4. to 6.6. of this Regulation.
- 3.2. All virtual testing results provided by the manufacturer in applying for an approval in accordance with paragraph 4. of this regulation shall refer to the toolchain evaluated and validated according to paragraph 1. of this annex.
- 3.3. For each approval application the manufacturer shall provide a confirmation that the virtual testing:
- (a) Was conducted using a validated toolchain;
 - (b) Was performed by staff with appropriate competences and skills;
 - (c) Has been performing using by a toolchain that has a unique identifier and sufficient information including scope, regulatory applicability and validation history to ensure that there is traceability and assurance that the toolchain is suitable and fit for purpose; and
 - (d) Has been performed using a toolchain within its scope and in accordance with any restrictions.
-