



COMMONWEALTH OF AUSTRALIA

AUSTRALIAN DESIGN RULE 23A
FOR
NEW PNEUMATIC PASSENGER CAR TYRES

As Endorsed by the
Australian Transport Advisory Council

The intention of this Australian Design Rule is to specify standards of strength, construction and standard pressure/load relationships for tyres of particular size designations to facilitate the choice of tyres for passenger cars and derivatives thereof.

The Australian Transport Advisory Council has recommended to Commonwealth, State and Territory Governments that all motor vehicles specified below, except those tyres on passenger car derivatives, forward control passenger vehicles and multi-purpose passenger cars which are labelled as suitable for light trucks by the designation L.T. or similar, shall comply with Australian Design Rule 23A - New Pneumatic Passenger Car Tyres.

VEHICLE CATEGORY	RULE AMENDMENT		
	MANUFACTURED ON OR AFTER		
	23A		
Passenger Cars			
Forward Control Passenger Vehicles up to 8 seats	1 Jan 1985		
9 seats	N/A		
Other Passenger Cars	1 Jan 1984		
Passenger Car Derivatives	1 Jan 1984		
Multi-Purpose Passenger Cars	1 Jan 1984		
Omnibuses up to 3.5 tonnes GVM			
up to 12 seats	N/A		
over 12 seats	N/A		
up to 4.5 tonnes GVM	N/A		
over 4.5 tonnes GVM	N/A		
Motorcycles	N/A		
Mopeds	N/A		
Specially Constructed Vehicles	N/A		
Other Vehicles not listed above			
up to 4.5 tonnes GVM	N/A		
over 4.5 tonnes GVM	N/A		

N/A - Not Applicable

GROSS VEHICLE MASS - Abbreviated to 'GVM'

The Australian Transport Advisory Council has also recommended to Commonwealth, State and Territory Governments that motor vehicles which comply with the requirements of ADR 23B - New Pneumatic Passenger Car Tyres need not comply with the requirements of ADR 23A.

Issued By: Department of Transport
PO Box 594
CIVIC SQUARE ACT 2608
AUSTRALIA

Issued: February 1984

AUSTRALIAN DESIGN RULE NO. 23A - NEW PNEUMATIC PASSENGER CAR TYRES

23A.1 Definitions

- 23A.1.1 'Asymmetrical Tyre' means a pneumatic tyre which, through tread pattern or construction, is required to be fitted to a vehicle such that one particular sidewall faces outwards. A symmetrical tyre is one which can be fitted to a vehicle without directional reference and is not asymmetrical.
- 23A.1.2 'Bead' means that part of the tyre usually made of steel wires, wrapped or reinforced by ply cords, that is shaped to fit the rim.
- 23A.1.3 'Bead Separation' means a breakdown of bond between components in the bead area.
- 23A.1.4 'Bias-Belted or Belted-Bias Tyre' means a pneumatic tyre in which the cords in the tyre carcass are laid at alternate angles which are substantially less than 90 deg. to the centreline of the tread. In addition cord reinforcing strips are incorporated into the tyre under the tread such that these cords make an included angle with the tyre centreline not greater than the same angle made by the carcass cords.
- 23A.1.5 'Carcass' means the tyre structure, except tread and sidewall rubber.
- 23A.1.6 'Chunking' means the breaking away of pieces of the tread.
- 23A.1.7 'Cord' means the strands forming the plies in the tyre.
- 23A.1.8 'Cord separation' means cord parting away from adjacent rubber compounds.
- 23A.1.9 'Cross Ply Tyre, or Bias Ply Tyre, or Diagonal Ply Tyre', means a pneumatic tyre in which the cords in the tyre carcass are laid at alternate angles which are substantially less than 90 deg. to the centreline of the tread.
- 23A.1.10 'Groove' means the space between two adjacent tread ribs.
- 23A.1.11 'Load Capacity Index' means an index corresponding to the maximum load rating as specified in Table 6.
- 23A.1.12 'Load Range' means an identification of a given size tyre with its load and inflation limits, and shall be designated as load range NL, ML and HL for tyres in Table 1.0 and as Standard Load (SL) and Extra Load (EL) for tyres in Table 1.1 and is used for reference purposes only in this Rule.

- 23A.1.13 'Maximum Load Rating' means the maximum load which the tyre is rated to carry, as specified in Tables 1 or approved supplement.
- 23A.1.14 'Overall Width' means the linear distance between the exteriors of the sidewalls of an inflated tyre, including elevations due to labelling, decoration, or protective bands or ribs.
- 23A.1.15 'Ply' means a layer of rubber-coated substantially parallel cords forming the tyre body.
- 23A.1.16 'Ply Separation' means a parting of rubber compound between adjacent plies.
- 23A.1.17 'Pneumatic Tyre' means a mechanical device made of rubber, chemicals, fabric and steel or other materials, which, when mounted on an automotive rim provides the traction and contains the gas or fluid that sustains the load.
- 23A.1.18 'Radial Ply Tyre' means a pneumatic tyre in which the ply cords which extend to the beads are laid at substantially 90 degrees to the centreline of the tread.
- 23A.1.19 'Rim' means a support for a tyre or a tyre and tube assembly upon which the tyre beads are seated.
- 23A.1.20 'Section Width' means the linear distance between the exteriors of the sidewalls of an inflated tyre, excluding elevations due to labelling, decoration, or protective bands.
- 23A.1.21 'Service description' means the combination of load capacity index and speed category symbols as defined in 23A.1.11 and 23A.1.24.
- 23A.1.22 'Sidewall' means that portion of a tyre between the tread and the bead.
- 23A.1.23 'Size Factor' means the sum of the section width and the outer diameter of a tyre determined on the test rim.
- 23A.1.24 'Speed Category' means a category assigned to a tyre by a tyre manufacturer which denotes the maximum vehicle speed for which the use of the tyre is rated (Table 4 refers).

23A.1.25 'Test Rim' means any rim of the applicable rim width specified in Table 1 for a particular tyre size designation with the rim bead seat and flange dimensions shown in one or more of the following or earlier editions:

- (i) the Tyre and Rim Standards Manual of the Tyre and Rim Association of Australia, 1981 Edition
- (ii) the 1981 Tyre and Rim Association Inc Year Book
- (iii) the British Standard, BS AU 50, Part 2A September 1973
- (iv) the Japan Automobile Tyre Manufacturers Association 1974 Edition
- (v) the Japanese Industrial Standards (JIS-04202) dated 1977, and (JIS-04218) dated 1975
- (vi) the European Tyre and Rim Technical Organisation Data Book (E.T.R.T.O.) dated 1981
- (vii) the Deutsche Industrie Norm (DIN) 7818, dated December 1979 and,
- (viii) Deutsche Industrie Norm (DIN) 7817, dated March 1979.

23A.1.26 'Test Wheel Speed' means the peripheral speed of the steel test wheel.

23A.1.27 'Tread' means the portion of a tyre that comes into contact with the road.

23A.1.28 'Tread Separation' means pulling away of the tread from the tyre carcass.

23A.1.29 'Treadwear Indicator' means an indicator incorporated into the tread of a tyre which gives a visual indication when the tread has worn down to leave a pre-determined minimum groove depth.

23A.1.30 'Tyre Carcass Construction Symbol' means a symbol relating to the type of carcass construction used in the manufacture of the tyre, viz:

- D - Bias or cross or diagonal ply,
- B - Belted Bias or Bias belted,
- R - Radial Ply.

23A.1.31 'Winter Tread' means a tread design intended for occasional operation in snow or mud and consisting essentially of a lug or block configuration incorporating numerous reinforcement tie bars between the tread elements.

23A.2 Requirements

23A.2.1 Tyres shall meet the requirements of Clause 23A.2.3 to 23A.3.5.2 inclusive except that tyres meeting the requirements of Clauses 23B.2.1 to 23B.3.5.2.6 shall be deemed to meet these requirements also. *

23A.2.2 Size and Construction

Tyre manufacturers shall nominate the rim alternatives for which the tyre is designed and these alternatives shall include at least all the approved rims specified for its size designation in the appropriate Part A of Table 2.

23A.2.3 Performance Requirements

23A.2.3.1 General

Each tyre shall conform to each of the following:

- (a) It shall meet the requirements specified in 23A.2.3.2 for its size designation, type, load and speed category or service description;
- (b) The permissible loading recommended by the tyre manufacturer for the various inflation pressures shall not depart from those indicated in Table I or approved supplement for that particular tyre;
- (c) Except where the tyre has a winter tread, it shall incorporate at least four treadwear indicators approximately equally spaced, each of which provides for a visual indication when the tread in the vicinity of the indicator has a depth of 0.063 ± 0.010 inch.

23A.2.3.2 Test Requirements

23A.2.3.2.1 Test Sample

Three tyres having identical characteristics when described according to requirements of Clause 23A.2.4 shall comprise a test sample:

- (a) one tyre shall be used for physical dimensions, resistance to bead unseating, and strength, in sequence;
- (b) a second tyre shall be used for tyre endurance; and
- (c) a third tyre for high speed performance.

23A.2.3.2.2 In the appropriate tests, pressures shall be established within 1 psi or 10 kPa (as appropriate) of the values specified for each appropriate test.

23A.2.3.2.3 Physical Dimensions

Each tyre shall conform to each of the following when measured in accordance with 23A.3.1

- (a) Its actual section width and overall width shall not exceed by more than 7% the section width specified in Table 1 or approved supplement for its size, designation and type.
- (b) Its size factor shall be at least as large as that specified in Table 1 or approved supplement for its size, designation and type.

23A.2.3.2.4 Resistance to Bead Unseating (For Tubeless Tyres only)

When tested in accordance with 23A.3.2 the applied force required to unseat the tyre bead at the point of contact shall not be less than:

- (a) 1,500 pounds for tyres with a section width of less than 6.3 inches for tyres in Table 1.0 and 160 mm for tyres in Table 1.1;
- (b) 2,000 pounds for tyres with a section width of 6.3 inches or more but less than 8 inches for tyres in Table 1.0 and 160 mm or more but less than 204 mm for tyres in Table 1.1;
- (c) 2,500 pounds for tyres with a section width of 8 inches or more for tyres in Table 1.0 or 204 mm or more for tyres in Table 1.1

For the purpose of this Clause the section width is that specified in Table 1 or approved supplement for the applicable size designation and type.

23A.2.3.2.5 Tyre Strength

Each tyre shall meet the requirements for minimum breaking energy specified in Table 3 when tested in accordance with 23A.3.3.

23A.2.3.2.6 Tyre Endurance

After completion of the laboratory test wheel endurance test specified in 23A.3.4 no tyre shall have tread, ply, cord, or bead separation, chunking, or broken cords.

23A.2.3.2.7 High Speed Test

After completion of the laboratory speed test specified in 23A.3.5 no tyre shall have tread, ply, cord, or bead separation, chunking, or broken cords.

23A.2.4 Labelling Requirements

Each tyre shall be conspicuously labelled on both sidewalls in the case of symmetrical tyres and on the outward sidewall in the case of asymmetrical tyres, with each of the following permanently moulded into or on to the tyre in letters and figures at least 0.150 inches high and depth at least 0.010 inches if below the background surface or 0.015 inches if above the background surface.

(a) Tyre size designation, which includes the speed category symbol, (as determined from Table 4) either within, or adjacent to the size designation, and tyre carcass construction symbol for radial ply and belted bias or bias belted tyres. In the case of bias tyres, diagonal ply tyres or cross ply tyres, labelling of each tyre with the Tyre Carcass Construction symbol shall be optional.

(b) For tyres in Table 1.0 the maximum load rating for the tyre expressed in pounds, followed by the word 'pounds' or the abbreviation 'lbs'; for tyres in Table 1.1 the maximum load rating for the tyre expressed in kilograms followed by the word 'kilograms' or the abbreviation 'kg'; or the load capacity index as determined from Table 6, in cases where the service description is marked adjacent to the tyre size designation.

- (c) Identification of manufacturer by
 - (1) Name; or
 - (2) Brand Name and an approved code mark.
- (d) The word 'tubeless' if applicable.
- (e) The word 'radial' if applicable.
- (f) The words 'belted bias' or 'bias belted' if applicable.

23A.3

Test Procedures

23A.3.1

Physical Dimensions

Determine tyre physical dimensions under uniform ambient conditions as follows:

- (a) Mount the tyre on a test rim and inflate it to the applicable pressure specified in Table 5.
- (b) Condition it at ambient room temperature for at least 24 hours.
- (c) Readjust pressure to that specified in (a).
- (d) Calliper the section width and overall width at 6 points approximately equally spaced around the tyre circumference.
- (e) Record the average of these measurements as the section width and overall width, respectively.
- (f) Determine tyre outer diameter by measuring the maximum circumference of the tyre and dividing this dimension by π .

23A.3.2

Tubeless Tyre Bead Unseating Resistance

23A.3.2.1

Preparation of Tyre-Test Rim Assembly

23A.3.2.1.1

Wash the tyre, dry it at the beads, and mount it without lubrication or adhesives on a clean, painted test rim.

23A.3.2.1.2

Adjust the inflation to the applicable pressure specified in Table 5 at ambient room temperature.

23A.3.2.1.3. Mount the tyre and test rim in the fixture shown in Figure 1, and force the standard block shown in Figure 2 against the tyre sidewall as required by the geometry of the fixture, or by any other approved test procedure.

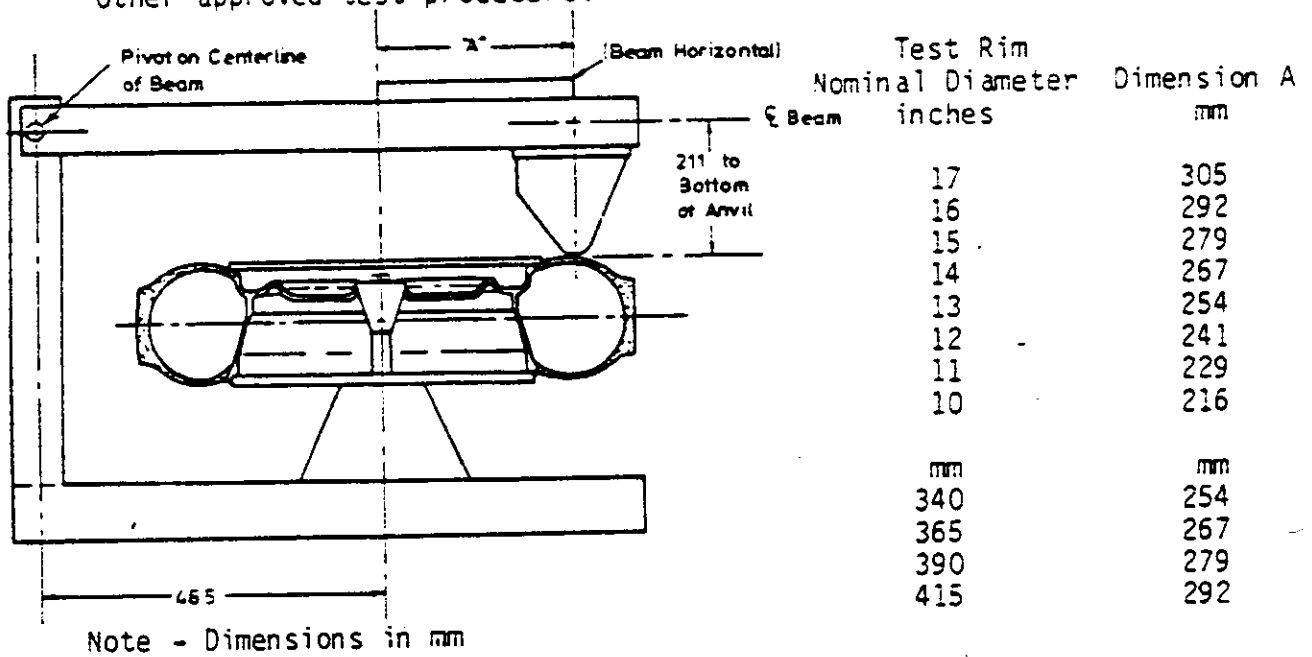


Figure 1 - Bead Unseating Fixture

23A.3.2.2. Test Procedure

23A.3.2.2.1. Apply a load through the block to the tyre outer sidewall at a distance no less than that specified in Figure 1 for the applicable test rim at a rate of 50-10 mm per minute, with the load arm substantially parallel to the tyre and rim assembly at time of engagement.

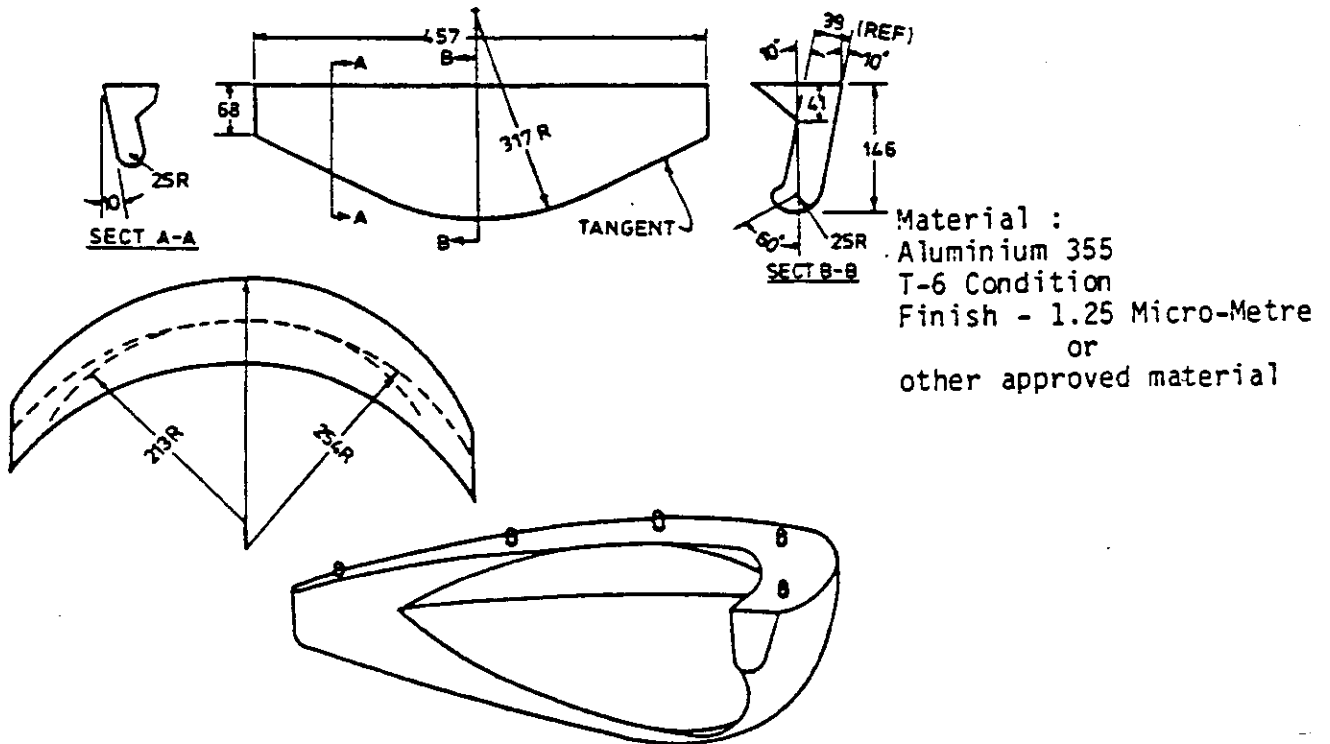


Figure 2 - Diagram of Bead Unseating Block (Dimensions in mm)

23A.3.2.2.2 Increase the load until the bead unseats or the applicable value specified in 23A.2.3.2.4 is reached.

23A.3.2.2.3 This test shall be repeated at least four times at locations approximately equally spaced around the tyre circumference.

23A.3.3 Tyre Strength.

23A.3.3.1 Preparation of tyre.

23A.3.3.1.1 Mount the tyre on a test rim and inflate it to the applicable pressure specified in Table 5.

23A.3.3.1.2 Condition it at test room temperature for at least 3 hours.

23A.3.3.1.3 Readjust its pressure to that specified in 23A.3.3.1.1.

23A.3.3.2 Test procedure.

23A.3.3.2.1 Force a cylindrical steel plunger with a hemispherical end and a diameter of $3/4 \pm 1/16$ inch perpendicularly into the tread as near to the centreline as possible, avoiding penetration into the tread groove, at the rate of $2 \pm \frac{1}{2}$ inches per minute.

23A.3.3.2.2 Record the force and penetration at five test points approximately equally spaced around the circumference of the tyre. If the tyre fails to break before the plunger is stopped by reaching the rim, record the force and penetration as the rim is reached and use these values in 23A.3.3.2.3.

23A.3.3.2.3 Compute the breaking energy for each test point by means of the following formula:

$$W = \frac{F \times P}{2}$$

where W = Energy, inch pounds;

F = Force, pounds; and

P = Penetration, inches.

23A.3.3.2.4 Determine the breaking energy value for the tyre by computing the average of the five values obtained in accordance with 23A.3.3.2.3.

23A.3.4 Tyre endurance.

23A.3.4.1 Preparation of tyre.

23A.3.4.1.1 Mount a new tyre on a test rim and inflate it to the applicable pressure specified in Table 5.

23A.3.4.1.2 Condition the tyre assembly at a temperature not less than 95°F for at least three hours.

23A.3.4.1.3 Readjust tyre pressure to that specified in 23A.3.4.1.1 immediately before testing.

23A.3.4.2 Test Procedure.

23A.3.4.2.1 Mount the tyre and test rim assembly on a test axle and press it against a flat-faced steel test wheel of an outside diameter not greater than 67.23 inches and at least as wide as the section width of the tyre to be tested, or an approved equivalent test wheel, with the load not less than that specified in Table 1 or approved supplement for the tyre's size designation and type, and the applicable pressure specified in Column (i) of the Table shown under 23A.3.4.2.3.

23A.3.4.2.2 During the test the ambient temperature at a distance of not less than 6 inches and not more than 3 feet from the tyre shall be at least 95°F. No provision shall be made for cooling the tyre during the test, with air at a lower temperature than 95°F.

23A.3.4.2.3 Conduct the test at not less than 50 miles per hour test wheel speed with a load on the tyre not less than that shown in Table 1 or approved supplement as appropriate to the pressure shown in the following schedule:

Load Range	Load from Table 1 (or approved supplement)		
	Column (i)	Column (ii)	Column (iii)
	for 4 hours	for 6 hours	for 24 hours
NL (Table 1.0)	24 p.s.i. column*	28 p.s.i. column	32 p.s.i. column
ML (Table 1.0)	28 p.s.i. column	32 p.s.i. column	36 p.s.i. column
HL (Table 1.0)	32 p.s.i. column	36 p.s.i. column	40 p.s.i. column
Standard load (Table 1.1)	180 kPa column	220 kPa column	240 kPa column
Extra load (Table 1.1)	220 kPa column	260 kPa column	280 kPa column

*'Column' refers to relevant column of Table 1 or approved Supplement.

23A.3.5 High Speed Test

23A.3.5.1 Preparation of Tyre

23A.3.5.1.1 Mount a new tyre on a test rim and inflate it to a pressure not greater than the applicable pressure as shown in the following schedule.

TEST INFLATION PRESSURES

Speed Category	Rim. Dia if applicable	Table 1.0 tyres						Metric Series Tyres (Table 1.0)			
		Bias, Bias Belted Belted Bias			Radial Ply			Bias, Belted Bias		Radial Ply	
		NL	ML (P.S.I.)	HL	NL	ML (P.S.I.)	HL	SL (kPa)	EL	SL (kPa)	EL
(-) or unmarked	10" & 12"	34	40	44	34	38	44	290	330	260	300
	13" & over	38	44	48							
L,M,N	NA	34	40	44	-	-	-	260	300	-	-
P,Q,R,S	NA	38	44	48	34	38	44	290	330	260	300
T,U,H,V	NA	42	48	52	38	42	48	310	350	280	320

23A.3.5.1.2 Condition the tyre assembly at a temperature not less than 20°C for at least three hours.

23A.3.5.1.3 Readjust tyre pressure to that specified in 23A.3.5.1.1 immediately before testing.

23A.3.5.2 Test Procedure

23A.3.5.2.1 Mount the tyre and test rim assembly on a test axle and press it against a flat faced steel test wheel of an outside diameter not greater than 2 metres with the load not less than 80% of the maximum load rating of the tyre.

23A.3.5.2.2 Operate the equipment to bring the test wheel speed from zero up to the initial test wheel speed in a period of at least 10 minutes.

23A.3.5.2.3 During the test, the ambient temperature at a distance of not less than 6 inches and not more than 3 feet from the tyre shall be at least 20°C. No provision shall be made for cooling the tyre during the test with air of a lower temperature than 20°C.

23A.3.5.2.4 The initial test wheel speed is equal to 40 km/h less than the maximum vehicle speed specified in Table 4 for the speed category symbol marked on the sidewall.

In the case where a tyre has a speed category 'V' the initial test wheel speed is 170 km/h.

23A.3.5.2.5 Operate the equipment with the test wheel speed not less than the initial test speed for at least 10 minutes, then at not less than the initial test speed plus 10 km/h for at least a further 10 minutes, then at not less than the initial test speed plus 20 km/h for at least a further 10 minutes and finally at not less than the initial test speed plus 30 km/h for at least a further 20 minutes.

TABLE 3

MINIMUM BREAKING ENERGY VALUES (INCH POUNDS)

TABLE 3.1. FOR BIAS OR BELTED BIAS PLY TYRES WITH A SECTION WIDTH OF 6.30 INCHES AND/OR ABOVE. (REFER TABLE 1 OR APPROVED SUPPLEMENT)

Cord Material	Load Range				
	NL	ML	HL	Standard Load	Extra Load
Rayon	1650 in-lbs	2475 in-lbs	3300 in-lbs	1650 in-lbs	3300 in-lbs
Other Material	2600 in-lbs	3900 in-lbs	5200 in-lbs	2600 in-lbs	5200 in-lbs

TABLE 3.2 FOR BIAS OR BELTED BIAS PLY TYRES WITH A SECTION WIDTH BELOW 6.30 INCHES (REFER TABLE 1 OR APPROVED SUPPLEMENT)

Cord Material	Load Range				
	NL	ML	HL	Standard Load	Extra Load
Rayon	1000 in-lbs	1875 in-lbs	2500 in-lbs	1000 in-lbs	2500 in-lbs
Other Material	1950 in-lbs	2925 in-lbs	3900 in-lbs	1950 in-lbs	3900 in-lbs

TABLE 3.3. FOR RADIAL PLY TYRES

Section Width (Refer Table 1) #	Load Range				
	NL	ML	HL	Standard Load	Extra Load
Below 6.30 inches for tyres in Table 1.0 or below 160 mm for tyres in Table 1.1;	1950 in-lbs	2925 in-lbs	3900 in-lbs	1950 in-lbs	3900 in-lbs
6.30 inches and above for tyres in Table 1.0 or 160 mm and above for Tyres in Table 1.1	2600 in-lbs	3900 in-lbs	5200 in-lbs	2600 in-lbs	5200 in-lbs

or approved supplement

TABLE 4 SPEED CATEGORY FOR TYRES

SPEED CATEGORY SYMBOL	L	M	N	P	Q	R	S	T	U	H	V
Maximum Vehicle Speed for which tyre is rated (km/h)	120	130	140	150	160	170	180	190	200	210	over 210

FOR TYRES MARKED WITH A '-' AS THE SPEED CATEGORY SYMBOL THE FOLLOWING SHALL APPLY

TYRE CONSTRUCTION	MAXIMUM VEHICLE SPEED FOR WHICH TYRE IS RATED (km/h)		
	RIM DIAMETERS (INCHES)		
	10"	12"	13" & over
Diagonal, or bias, or cross ply, or bias belted or belted bias	120	140	150
Radial Ply	170		

NOTE: The absence of any of the above speed category symbols shall imply that the speed category symbol of the tyre is the same as one marked with a '-' designation.

TABLE 5
TEST INFLATION PRESSURES

TABLE 5.1

TYRES IN TABLE 1.0	LOAD RANGE		
	NL	ML	HL
Pressure (in psi) to be used in tests for physical dimensions, bead unseating, tyre strength and tyre endurance	24	28	32

TABLE 5.2

TYRES IN TABLE 1.1	LOAD RANGE	
	STANDARD LOAD	EXTRA LOAD
Pressure (in kPa) to be used in tests for physical dimensions, bead unseating, tyre strength and tyre endurance	180	220

TABLE 6

LIST OF LOAD-CAPACITY-INDEX SYMBOLS

Load-capacity index	Corresponding maximum load (Kg)
0	45
1	46.2
2	47.5
3	48.7
4	50
5	51.5
6	53
7	54.5
8	56
9	58
10	60
11	61.5
12	63
13	65
14	67
15	69
16	71
17	73
18	75
19	77.5
20	80
21	82.5
22	85
23	87.5
24	90
25	92.5
26	95
27	97.5
28	100
29	103

TABLE 6 (CONTINUED)

Load-capacity index	Corresponding maximum load (kg)
30	106
31	109
32	112
33	115
34	118
35	121
36	125
37	128
38	132
39	136
40	140
41	145
42	150
43	155
44	160
45	165
46	170
47	175
48	180
49	185
50	190
51	195
52	200
53	206
54	212
55	218
56	224
57	230
58	236
59	243
60	250
61	257

TABLE 6 (CONTINUED)

Load-capacity index	Corresponding maximum load (kg)
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580
90	600
91	615
92	630
93	650

TABLE 6 (CONTINUED)

Load-capacity index	Corresponding maximum load (kg)
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.C(A)

TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR CONVENTIONAL AND LOW SECTION HEIGHT BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
6.00-13	NL			770	820	860	900	930	970	1010							4	29.37	6.00
	ML			770	820	860	900	930	970	1010	1040	1080							
	HL			770	820	860	900	930	970	1010	1040	1080	1110	1140					
6.50-13	NL			890	930	980	1030	1070	1110	1150						4½	30.75	6.60	
	ML			890	930	980	1030	1070	1110	1150	1190	1230							
	HL			890	930	980	1030	1070	1110	1150	1190	1230	1270	1300					
7.00-13	NL			980	1030	1080	1130	1180	1230	1270						5	31.88	7.10	
	ML			980	1030	1080	1130	1180	1230	1270	1310	1360							
	HL			980	1030	1080	1130	1180	1230	1270	1310	1360	1400	1440					
6.00-14	NL			840	900	930	980	1020	1060	1100						4	30.64	6.10	
	ML			840	900	930	980	1020	1060	1100	1130	1170							
	HL			840	900	930	980	1020	1060	1100	1130	1170	1210	1240					
6.45-14	NL			860	910	960	1000	1040	1080	1120						4½	30.92	6.60	
	ML			860	910	960	1000	1040	1080	1120	1160	1200							
	HL			860	910	960	1000	1040	1080	1120	1160	1200	1240	1270					
6.50-14	NL			930	990	1030	1080	1130	1170	1210						4½	31.75	6.60	
	ML			930	990	1030	1080	1130	1170	1210	1250	1300							
	HL			930	990	1030	1080	1130	1170	1210	1250	1300	1330	1370					
6.95-14	NL			950	1000	1050	1100	1140	1190	1230						5	31.96	7.00	
	ML			950	1000	1050	1100	1140	1190	1230	1270	1310							
	HL			950	1000	1050	1100	1140	1190	1230	1270	1310	1350	1390					
7.00-14	NL			1030	1100	1140	1190	1240	1290	1340						5	32.88	7.10	
	ML			1030	1100	1140	1190	1240	1290	1340	1380	1430							
	HL			1030	1100	1140	1190	1240	1290	1340	1380	1430	1470	1520					
7.35-14	NL			1040	1100	1160	1210	1260	1310	1360						5	32.92	7.30	
	ML			1040	1100	1160	1210	1260	1310	1360	1400	1450							
	HL			1040	1100	1160	1210	1260	1310	1360	1400	1450	1490	1540					
7.50-14	NL			1150	1230	1280	1340	1390	1450	1500						5½	34.19	7.65	
	ML			1150	1230	1280	1340	1390	1450	1500	1550	1600							
	HL			1150	1230	1280	1340	1390	1450	1500	1550	1600	1650	1700					
7.75-14	NL			1150	1210	1270	1330	1390	1440	1500						5½	34.09	7.75	
	ML			1150	1210	1270	1330	1390	1440	1500	1550	1600							
	HL			1150	1210	1270	1330	1390	1440	1500	1550	1600	1650	1690					
8.00-14	NL			1240	1320	1380	1440	1500	1560	1620						6	35.17	8.10	
	ML			1240	1320	1380	1440	1500	1560	1620	1670	1730							
	HL			1240	1320	1380	1440	1500	1560	1620	1670	1730	1780	1830					
8.25-14	NL			1250	1310	1380	1440	1500	1560	1620						6	35.11	8.20	
	ML			1250	1310	1380	1440	1500	1560	1620	1670	1730							
	HL			1250	1310	1380	1440	1500	1560	1620	1670	1730	1780	1830					
8.50-14	NL			1330	1420	1480	1550	1610	1670	1740						6	35.91	8.35	
	ML			1330	1420	1480	1550	1610	1670	1740	1790	1850							
	HL			1330	1420	1480	1550	1610	1670	1740	1790	1850	1910	1960					
8.55-14	NL			1360	1430	1510	1580	1640	1710	1770						6	36.06	8.50	
	ML			1360	1430	1510	1580	1640	1710	1770	1830	1890							
	HL			1360	1430	1510	1580	1640	1710	1770	1830	1890	1950	2000					
8.85-14	NL			1430	1510	1580	1660	1730	1790	1860						6½	36.82	8.95	
	ML			1430	1510	1580	1660	1730	1790	1860	1920	1990							
	HL			1430	1510	1580	1660	1730	1790	1860	1920	1990	2050	2100					
9.00-14	NL			1430	1510	1580	1660	1730	1790	1860						6½	36.91	8.80	
	ML			1430	1510	1580	1660	1730	1790	1860	1920	1990							
	HL			1430	1510	1580	1660	1730	1790	1860	1920	1990	2050	2100					

TABLE 1.0(A) (CONTINUED)

ADR 23A

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (P.S.I.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
9.50-14	NL			1540	1640	1700	1780	1850	1930	2000							6½	37.74	9.05
	ML			1540	1640	1700	1780	1850	1930	2000	2060	2130							
	HL			1540	1640	1700	1780	1850	1930	2000	2060	2130	2200	2260					
6.00-15	NL			890	940	980	1030	1070	1110	1150							4	31.64	6.10
	ML			890	940	980	1030	1070	1110	1150	1190	1230							
	HL			890	940	980	1030	1070	1110	1150	1190	1230	1270	1300					
6.50-15	NL			980	1040	1080	1130	1180	1230	1270							4½	32.75	6.60
	ML			980	1040	1080	1130	1180	1230	1270	1320	1360							
	HL			980	1040	1080	1130	1180	1230	1270	1320	1360	1400	1440					
6.70-15	NL			1110	1190	1230	1290	1340	1400	1450							4½	33.95	7.00
	ML			1110	1190	1230	1290	1340	1400	1450	1500	1550							
	HL			1110	1190	1230	1290	1340	1400	1450	1500	1550	1590	1640					
6.85-15	NL			950	1000	1050	1100	1140	1190	1230							5	32.48	6.90
	ML			950	1000	1050	1100	1140	1190	1230	1270	1320							
	HL			950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1390					
7.00-15	NL	1170	1240	1310	1380	1450	1515	1580	1640	1700							5	36.02	7.35
	ML	1170	1240	1310	1380	1450	1515	1580	1640	1700	1760	1820							
	HL	1170	1240	1310	1380	1450	1515	1580	1640	1700	1760	1820	1870	1930					
7.10-15	NL			1190	1270	1320	1380	1440	1500	1550							5	34.89	7.40
	ML			1190	1270	1320	1380	1440	1500	1550	1600	1660							
	HL			1190	1270	1320	1380	1440	1500	1550	1600	1660	1710	1760					
7.35-15	NL			1070	1130	1180	1240	1290	1340	1390							5½	33.86	7.50
	ML			1070	1130	1180	1240	1290	1340	1390	1440	1480							
	HL			1070	1130	1180	1240	1290	1340	1390	1440	1480	1530	1570					
7.60-15	NL			1310	1400	1450	1520	1580	1640	1710							5½	36.05	7.90
	ML			1310	1400	1450	1520	1580	1640	1710	1760	1820							
	HL			1310	1400	1450	1520	1580	1640	1710	1760	1820	1880	1930					
7.75-15	NL			1150	1210	1270	1330	1380	1440	1490							5½	34.53	7.65
	ML			1150	1210	1270	1330	1380	1440	1490	1540	1590							
	HL			1150	1210	1270	1330	1380	1440	1490	1540	1590	1640	1690					
8.00-15	NL			1380	1470	1530	1600	1670	1730	1800							6	36.84	8.30
	ML			1380	1470	1530	1600	1670	1730	1800	1860	1920							
	HL			1380	1470	1530	1600	1670	1730	1800	1860	1920	1980	2040					
8.15-15	NL			1240	1300	1370	1430	1490	1550	1610							6	35.50	8.15
	ML			1240	1300	1370	1430	1490	1550	1610	1660	1720							
	HL			1240	1300	1370	1430	1490	1550	1610	1660	1720	1770	1820					
8.20-15	NL			1470	1570	1630	1710	1780	1850	1920							6	37.50	8.50
	ML			1470	1570	1630	1710	1780	1850	1920	1980	2050							
	HL			1470	1570	1630	1710	1780	1850	1920	1980	2050	2110	2170					
8.25-15	NL	1030	1190	1250	1310	1380	1440	1500	1560	1620							6	35.57	8.20
	ML	1030	1190	1250	1310	1380	1440	1500	1560	1620	1670	1730							
	HL	1030	1190	1250	1310	1380	1440	1500	1560	1620	1670	1730	1780	1830					
8.45-15	NL			1340	1410	1480	1550	1620	1680	1740							6	36.37	8.35
	ML			1340	1410	1480	1550	1620	1680	1740	1800	1860							
	HL			1340	1410	1480	1550	1620	1680	1740	1800	1860	1920	1970					
8.55-15	NL	1220	1290	1360	1430	1510	1580	1640	1710	1770							6	36.57	8.45
	ML	1220	1290	1360	1430	1510	1580	1640	1710	1770	1830	1890							
	HL	1220	1290	1360	1430	1510	1580	1640	1710	1770	1830	1890	1950	2000					
8.85-15	NL			1430	1510	1580	1650	1720	1790	1860							6½	37.29	8.80
	ML			1430	1510	1580	1650	1720	1790	1860	1920	1980							
	HL			1430	1510	1580	1650	1720	1790	1860	1920	1980	2040	2100					

TABLE 1.0 (A) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (P.S.I.)													Test rim width (inches)	Minimum size factor (inches)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38	40			
8.90-15	NL			1700	1810	1880	1970	2050	2130	2210					6½	39.54	9.30
	ML			1700	1810	1880	1970	2050	2130	2210	2290	2360					
	HL			1700	1810	1880	1970	2050	2130	2210	2290	2360	2430	2500			
9.00-15	NL			1460	1540	1620	1690	1760	1830	1900					6	37.45	8.50
	ML			1460	1540	1620	1690	1760	1830	1900	1970	2030					
	HL			1460	1540	1620	1690	1760	1830	1900	1970	2030	2090	2150			
9.15-15	NL			1510	1600	1680	1750	1830	1900	1970					6½	37.92	9.05
	ML			1510	1600	1680	1750	1830	1900	1970	2030	2100					
	HL			1510	1600	1680	1750	1830	1900	1970	2030	2100	2160	2230			
6.00-16	NL			1075	1135	1195	1250	1300	1350	1400					4	34.17	6.25
	ML			1075	1135	1195	1250	1300	1350	1400	1450	1500					
6.50-16	NL	1090	1150	1215	1280	1345	1405	1465	1525	1580					4½	35.59	6.80
	ML	1090	1150	1215	1280	1345	1405	1465	1525	1580	1635	1690					
	HL	1090	1150	1215	1280	1345	1405	1465	1525	1580	1635	1690	1740	1790			
6.70-16	NL		1185	1240	1300	1355	1410	1465	1525	1580					4½	35.60	7.40
	ML		1185	1240	1300	1355	1410	1465	1525	1580	1635	1690					
	HL		1185	1240	1300	1355	1410	1465	1525	1580	1635	1690	1740	1795			
7.00-16	NL			1365	1440	1515	1585	1650	1715	1780					5	37.02	7.35
	ML			1365	1440	1515	1585	1650	1715	1780	1840	1900					
7.50-16	NL			1565	1650	1735	1810	1890	1960	2035					5½	38.78	8.00
	ML			1565	1650	1735	1810	1890	1960	2035	2105	2175					
6.50-17	NL	1215	1275	1330	1390	1450	1500	1560	1620						5	37.00	7.60
	ML	1215	1275	1330	1390	1450	1500	1560	1620	1680	1740						
	HL	1215	1275	1330	1390	1450	1500	1560	1620	1680	1740	1795	1850				
L84-15	NL			1510	1600	1680	1750	1830	1900	1970					6	37.88	8.65
	ML			1510	1600	1680	1750	1830	1900	1970	2030	2100					
	HL			1510	1600	1680	1750	1830	1900	1970	2030	2100	2160	2230			

TABLE 1.0(B)

THE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '70 SERIES' BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
A70-13	NL	720	770	810	860	900	940	980	1020	1060					5 1/2	30.27	7.30
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
B70-13	NL	780	840	890	930	980	1030	1070	1110	1150				5 1/2	31.05	7.55	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
C70-13	NL	840	890	950	1000	1050	1100	1140	1190	1230				5 1/2	31.68	7.80	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
D70-13	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5 1/2	32.34	8.00	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
A70-14	NL	720	770	810	860	900	940	980	1020	1060				5	30.62	6.95	
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160				1200
B70-14	NL	780	840	890	930	980	1030	1070	1110	1150				5 1/2	31.60	7.40	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
C70-14	NL	840	890	950	1000	1050	1100	1140	1190	1230				5 1/2	32.21	7.65	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
D70-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5 1/2	32.81	7.85	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
E70-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				5 1/2	33.45	8.05	
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540				1580
F70-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				5 1/2	34.16	8.30	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650				1700
G70-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				6	35.18	8.75	
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780				1830
H70-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				6	36.19	9.10	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950				2010
J70-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860				6 1/2	36.87	9.50	
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040				2100
L70-14	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970				6 1/2	37.62	9.75	
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170				2230
A70-15	NL	720	770	810	860	900	940	980	1020	1060				4 1/2	30.00	6.60	
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160				1200
C70-15	NL	840	890	950	1000	1050	1100	1140	1190	1230				5 1/2	32.75	7.50	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1390
D70-15	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5 1/2	33.37	7.70	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490

TABLE 1.0(B) (CONTINUED)

ADR 23A

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
E70-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400							6	34.13	8.10
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490							
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580					
F70-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500							6	34.89	8.35
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610							
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700					
G70-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620							6	35.66	8.60
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730							
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830					
H70-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770							6	36.64	8.95
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890							
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010					
J70-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860							6½	37.36	9.35
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980							
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100					
K70-15	NL	1290	1380	1460	1540	1620	1690	1770	1830	1900							6½	37.66	9.40
	ML	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030							
	HL	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030	2090	2150					
L70-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970							6½	38.09	9.60
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100							
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230					

TABLE 1.0(C)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
'SUPER BALLOON' SIZES																			
4.40-10	ML	285	310	330	350	365	385	400	420	435							3	22.67	4.40
4.80-10	NL	320	355	390	430	470	490	510	535	555							3½	23.90	5.00
	ML	320	355	390	430	470	490	510	535	555	575	595							
5.20-10	ML	350	395	440	485	530	555	575	605	625							3½	24.84	5.20
	ML	350	395	440	485	530	555	575	605	625	650	670							
	HL	350	395	440	485	530	555	575	605	625	650	670	695	715					
5.90-10	NL	385	430	475	515	550	580	605	630	650							4	24.00	5.80
	ML	385	430	475	515	550	580	605	630	650	675	700							
5.95-10	ML	500	530	560	590	620	650	670	700	730							4	25.05	5.79
4.80-12	ML	330	380	420	465	500	535	575	610	640							3	25.85	4.80
5.20-12	NL	395	445	495	545	595	625	655	685	710							3½	26.79	5.20
	ML	395	445	495	545	595	625	655	685	710	735	760							
	HL	395	445	495	545	595	625	655	685	710	735	760	785	810					
5.60-12	NL	460	520	575	620	670	715	760	795	825							4	27.83	5.71
	ML	460	520	575	620	670	715	760	795	825	855	885							
	HL	460	520	575	620	670	715	760	795	825	855	885	915	940					
5.90-12	NL	460	505	550	595	640	665	700	730	755							4	26.00	5.90
	ML	460	505	550	595	640	665	700	730	755	785	810							
6.20-12	NL	505	555	605	655	705	735	775	805	835							4½	27.00	6.30
	ML	505	555	605	655	705	735	775	805	835	865	895							
5.20-13	NL	430	485	540	590	640	670	710	740	765							3½	27.72	5.20
	ML	430	485	540	590	640	670	710	740	765	795	820							
	HL	430	485	540	590	640	670	710	740	765	795	820	850	875					
5.60-13	NL	495	560	620	675	725	770	810	850	880							4	28.92	5.71
	ML	495	560	620	675	725	770	810	850	880	910	945							
	HL	495	560	620	675	725	770	810	850	880	910	945	975	1005					
5.90-13	NL	555	625	695	755	815	860	895	935	970							4	29.74	5.91
	ML	555	625	695	755	815	860	895	935	970	1005	1040							
	HL	555	625	695	755	815	860	895	935	970	1005	1040	1075	1105					
6.15-13	NL			720	750	790	830	860	900	930							4½	28.79	6.18
	ML			720	750	790	830	860	900	930	960	990							
6.20-13	NL	520	580	640	700	750	780	820	850	880							4½	28.00	6.30
	ML	520	580	640	700	750	780	820	850	880	910	945							
6.40-13	NL	630	705	785	845	915	945	985	1025	1060							4½	31.26	6.42
	ML	630	705	785	845	915	945	985	1020	1060	1100	1140							
	HL	630	705	785	845	915	945	985	1020	1060	1100	1140	1175	1210					
6.45-13	NL			825	870	910	955	995	1035	1070							4½	29.92	6.60
	ML			825	870	910	955	995	1035	1070	1110	1145							
6.70-13	NL	690	775	860	935	1000	1045	1090	1135	1175							4½	32.14	6.69
	ML	690	775	860	935	1000	1045	1090	1135	1175	1220	1260							
	HL	690	775	860	935	1000	1045	1090	1135	1175	1220	1260	1305	1340					
6.90-13	NL	695	745	795	845	915	955	1005	1045	1085							5	30.00	7.20
	ML	695	745	795	845	915	955	1005	1045	1085	1120	1160							
6.95-13	NL			900	950	995	1040	1085	1130	1170							5	30.96	7.00
	ML			900	950	995	1040	1085	1130	1170	1210	1250							

TABLE 1.0 (C) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
5.20-14	NL	475	535	595	645	695	735	785	825	855					3 1/2	28.89	5.20
	ML	475	535	595	645	695	735	785	825	855	885	915					
	HL	475	535	595	645	695	735	785	825	855	885	915	945	975			
5.60-14	NL	530	595	660	715	770	815	855	890	920					4	29.94	5.71
	ML	530	595	660	715	770	815	855	890	920	955	990					
	HL	530	595	660	715	770	815	855	890	920	955	990	1020	1050			
5.90-14	NL	585	660	730	785	850	880	925	970	1005					4	30.76	5.91
	ML	585	660	730	785	850	880	925	970	1005	1040	1080					
	HL	585	660	730	785	850	880	925	970	1005	1040	1080	1115	1145			
6.15-14	NL			760	800	840	880	920	950	990					4 1/2	29.83	6.18
	ML			760	800	840	880	920	950	990	1020	1050					
6.40-14	NL	660	745	825	890	960	1000	1050	1090	1130					4 1/2	32.19	6.42
	ML	660	745	825	890	960	1000	1050	1090	1130	1170	1210					
	HL	660	745	825	890	960	1000	1050	1090	1130	1170	1210	1250	1290			
5.0-15	NL	460	520	575	610	660	690	720	750	775					4	28.53	5.39
	ML	460	520	575	610	660	690	720	750	775	805	835					
	HL	460	520	575	610	660	690	720	750	775	805	835	860	885			
5.20-15	NL	505	570	630	685	740	780	830	870	900					3 1/2	29.75	5.20
	ML	505	570	630	685	740	780	830	870	900	935	965					
	HL	505	570	630	685	740	780	830	870	900	935	965	1000	1030			
5.5-15	NL	520	585	650	710	760	790	830	860	890					4	29.54	5.79
	ML	520	585	650	710	760	790	830	860	890	925	955					
	HL	520	585	650	710	760	790	830	860	890	925	955	985	1015			
5.60-15	NL	555	625	695	755	815	860	895	935	970					4	30.87	5.71
	ML	555	625	695	755	815	860	895	935	970	1005	1040					
	HL	555	625	695	755	815	860	895	935	970	1005	1040	1075	1105			
5.90-15	NL	615	695	770	825	890	935	980	1015	1050					4	31.77	5.91
	ML	615	695	770	825	890	935	980	1015	1050	1090	1130					
	HL	615	695	770	825	890	935	980	1015	1050	1090	1130	1165	1200			
5.35-15	NL			800	840	880	930	960	1000	1040					4 1/2	30.85	6.18
	ML			800	840	880	930	960	1000	1040	1080	1110					
6.40-15	NL			875	950	1010	1055	1100	1150	1190					4 1/2	33.20	6.42
	ML			875	950	1010	1055	1100	1150	1190	1230	1260					
7.60-16	NL		1300	1380	1450	1530	1600	1660	1730	1790					5 1/2	37.32	7.60
	ML		1300	1380	1450	1530	1600	1660	1730	1790	1850	1910					
LOW SECTION SIZES																	
5.00-12	NL	370	420	465	505	540	565	580	605	625					3 1/2	25.62	5.04
	ML	370	420	465	505	540	565	580	605	625	650	670					
	HL	370	420	465	505	540	565	580	605	625	650	670	695	715			
5.50-12	NL	415	470	520	560	605	635	665	695	720					4	26.93	5.59
	ML	415	470	520	560	605	635	665	695	720	745	770					
	HL	415	470	520	560	605	635	665	695	720	745	770	800	820			
6.00-12	NL	485	545	605	655	705	735	785	815	845					4 1/2	28.33	6.14
	ML	485	545	605	655	705	735	785	815	845	875	905					
	HL	485	545	605	655	705	735	785	815	845	875	905	935	965			
5.00-13	NL	410	460	510	545	585	610	635	660	685					3 1/2	26.64	5.04
	ML	410	460	510	545	585	610	635	660	685	710	735					
	HL	410	460	510	545	585	610	635	660	685	710	735	755	780			

TABLE 1.0 (C) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)													Test rim width (inches)	Minimum size factor (inches)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38	40			
5.50-13	NL	445	495	550	595	640	670	710	740	765					4	27.95	5.59
	ML	445	495	550	595	640	670	710	740	765	795	820					
	HL	445	495	550	595	640	670	710	740	765	795	820	850	875			
7.25-13	NL	730	825	915	990	1070	1110	1160	1200	1245				5	32.51	7.24	
	ML	730	825	915	990	1070	1110	1160	1200	1245	1290	1335					
	HL	730	825	915	990	1070	1110	1160	1200	1245	1290	1335	1380				1420
7.50-13	NL	775	875	970	1040	1120	1180	1225	1270	1315				5 1/2	33.22	7.48	
	ML	775	875	970	1040	1120	1180	1225	1270	1315	1365	1410					
	HL	775	875	970	1040	1120	1180	1225	1270	1315	1365	1410	1460				1500
5.50-15L	NL	505	570	630	675	725	760	800	840	870				4	29.97	5.59	
	ML	505	570	630	675	725	760	800	840	870	900	935					
	HL	505	570	630	675	725	760	800	840	870	900	935	965				995
6.00-15L	NL	595	665	740	800	860	890	930	970	1005				4 1/2	31.29	6.14	
	ML	595	665	740	800	860	890	930	970	1005	1040	1080					
	HL	595	665	740	800	860	890	930	970	1005	1040	1080	1115				1145
6.50-15L	NL	675	755	840	900	970	1010	1060	1105	1145				4 1/2	32.68	6.54	
	ML	675	755	840	900	970	1010	1060	1105	1145	1185	1230					
	HL	675	755	840	900	970	1010	1060	1105	1145	1185	1230	1270				1305
7.00-15L	NL	760	855	950	1025	1100	1145	1190	1235	1280				5	33.85	7.01	
	ML	760	855	950	1025	1100	1145	1190	1235	1280	1325	1375					
	HL	760	855	950	1025	1100	1145	1190	1235	1280	1325	1375	1420				1460
'SUPER LOW SECTION' SIZES																	
145-10/5.95-10	NL	380	430	475	515	550	580	605	630	650				4	24.76	5.79	
	ML	380	430	475	515	550	580	605	630	650	675	700					
	HL	380	430	475	515	550	580	605	630	650	675	700	725				745
125-12/5.35-12	NL	335	380	420	450	485	510	535	550	570				3 1/2	24.68	5.00	
	ML	335	380	420	450	485	510	535	550	570	590	610					
	HL	335	380	420	450	485	510	535	550	570	590	610	630				650
135-12/5.65-12	NL	370	420	465	505	540	570	590	620	640				4	25.53	5.39	
	ML	370	420	465	505	540	570	590	620	640	665	690					
	HL	370	420	465	505	540	570	590	620	640	665	690	710				730
145-12/5.95-12	NL	440	495	550	595	640	665	700	730	755				4	26.69	5.79	
	ML	440	495	550	595	640	665	700	730	755	785	810					
	HL	440	495	550	595	640	665	700	730	755	785	810	840				865
155-12/6.15-12	NL	485	545	605	655	705	735	775	805	835				4 1/2	27.36	6.18	
	ML	485	545	605	655	705	735	775	805	835	865	895					
	HL	485	545	605	655	705	735	775	805	835	865	895	925				950
135-13/5.65-13	NL	415	470	520	555	595	625	655	685	710				4	26.53	5.39	
	ML	415	470	520	555	595	625	655	685	710	735	760					
	HL	415	470	520	555	595	625	655	685	710	735	760	785				810
145-13/5.95-13	NL	470	525	585	620	670	705	745	770	800				4	27.61	5.79	
	ML	470	525	585	620	670	705	745	770	800	825	855					
	HL	470	525	585	620	670	705	745	770	800	825	855	885				910
155-13/6.15-13	NL	515	575	640	700	750	780	820	850	880				4 1/2	28.44	6.18	
	ML	515	575	640	700	750	780	820	850	880	910	945					
	HL	515	575	640	700	750	780	820	850	880	910	945	975				1005
165-13/6.45-13	NL	575	645	715	770	825	865	905	935	970				4 1/2	29.52	6.57	
	ML	575	645	715	770	825	865	905	935	970	1005	1040					
	HL	575	645	715	770	825	865	905	935	970	1005	1040	1075				1105
175-13/6.95-13	NL	635	715	795	845	915	955	1005	1045	1085				5	30.34	7.01	
	ML	635	715	795	845	915	955	1005	1045	1085	1120	1160					
	HL	635	715	795	845	915	955	1005	1045	1085	1120	1160	1200				1235

TABLE 1.0(C) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
185-13/7.35-13	NL	695	785	870	945	1010	1060	1115	1160	1205					5½	31.41	7.40
	ML	695	785	870	945	1010	1060	1115	1160	1205	1245	1290					
	HL	695	785	870	945	1010	1060	1115	1160	1205	1245	1290	1335	1370			
135-14/5.65-14	NL	440	495	550	595	640	665	700	730	755					4	27.54	5.59
	ML	440	495	550	595	640	665	700	730	755	785	810					
	HL	440	495	550	595	640	665	700	730	755	785	810	840	865			
145-14/5.95-14	NL	495	560	620	665	715	750	785	815	845					4	28.54	5.79
	ML	495	560	620	665	715	750	785	815	845	875	905					
	HL	495	560	620	665	715	750	785	815	845	875	905	935	965			
155-14/6.15-14	NL	540	610	675	730	780	825	860	895	925					4½	29.45	6.18
	ML	540	610	675	730	780	825	860	895	925	960	995					
	HL	550	610	675	730	780	825	860	895	925	960	995	1030	1060			
125-15/5.35-15	NL	395	445	495	535	570	600	625	650	675					3½	27.69	5.00
	ML	395	445	495	535	570	600	625	650	675	700	720					
	HL	395	445	495	535	570	600	625	650	675	700	720	745	770			
135-15/5.65-15	NL	460	520	575	610	660	690	720	750	775					4	28.53	5.39
	ML	460	520	575	610	660	690	720	750	775	805	835					
	HL	460	520	575	610	660	690	720	750	775	805	835	860	885			
145-15/5.95-15	NL	520	585	650	710	760	790	830	860	890					4	29.54	5.79
	ML	520	585	650	710	760	790	830	860	890	925	955					
	HL	520	585	650	710	760	790	830	860	890	925	955	985	1015			
155-15/6.35-15	NL	585	660	730	780	835	875	915	950	985					4½	30.45	6.18
	ML	585	660	730	780	835	875	915	950	985	1020	1055					
	HL	585	660	730	780	835	875	915	950	985	1020	1055	1090	1125			
175-15/7.15-15	NL	705	795	880	955	1020	1070	1125	1170	1215					5	32.42	7.01
	ML	705	795	880	955	1020	1070	1125	1170	1215	1255	1300					
	HL	705	795	880	955	1020	1070	1125	1170	1215	1255	1300	1345	1385			
165-14/6.45-14	NL	650	715	770	815	880	925	970	1000	1035					4½	30.79	6.57
	ML	650	715	770	815	880	925	970	1000	1035	1080	1115					
	HL	650	715	770	815	880	925	970	1000	1035	1080	1115	1145	1170			
175-14/6.95-14	NL	715	780	850	915	980	1025	1070	1115	1160					5	31.65	7.01
	ML	715	780	850	915	980	1025	1070	1115	1160	1200	1235					
	HL	715	780	850	915	980	1025	1070	1115	1160	1200	1235	1270	1310			
185-14/7.35-14	NL	805	870	940	1000	1080	1135	1190	1235	1290					5½	32.66	7.40
	ML	805	870	940	1000	1080	1135	1190	1235	1290	1325	1370					
	HL	805	870	940	1000	1080	1135	1190	1235	1290	1325	1370	1400	1435			
195-14/7.75-14	NL	860	950	1025	1105	1180	1235	1290	1345	1400					5½	33.67	7.80
	ML	860	950	1025	1105	1180	1235	1290	1345	1400	1445	1490					
	HL	860	950	1025	1105	1180	1235	1290	1345	1400	1445	1490	1535	1580			
205-14/8.25-14	NL	940	1025	1115	1190	1270	1335	1400	1455	1510					6	34.84	8.19
	ML	940	1025	1115	1190	1270	1335	1400	1455	1510	1565	1610					
	HL	940	1025	1115	1190	1270	1335	1400	1455	1510	1565	1610	1655	1700			
215-14/8.55-14	NL	1015	1115	1200	1290	1380	1445	1520	1590	1640					6	35.75	8.58
	ML	1015	1115	1200	1290	1380	1445	1520	1590	1650	1700	1740					
	HL	1015	1115	1200	1290	1380	1445	1520	1590	1650	1700	1740	1785	1830			
225-14/8.85-14	NL	1080	1180	1280	1380	1465	1540	1620	1700	1750					6½	36.69	8.98
	ML	1080	1180	1280	1380	1465	1540	1620	1700	1750	1810	1850					
	HL	1080	1180	1280	1380	1465	1540	1620	1700	1750	1810	1850	1915	1970			
165-15/6.85-15	NL	685	750	805	860	915	970	1015	1060	1105					4½	31.73	6.57
	ML	685	750	805	860	915	970	1015	1060	1105	1135	1180					
	HL	685	750	805	860	915	970	1015	1060	1105	1135	1180	1200	1235			

TABLE 1.0 (C) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
185-15/7.35-15	NL	815	905	970	1050	1115	1180	1235	1280	1325					5½	33.56	7.40
	ML	815	905	970	1050	1115	1180	1235	1280	1325	1370	1410					
	HL	815	905	970	1050	1115	1180	1235	1280	1325	1370	1410	1445	1490			
195-15/7.75-15	NL	880	970	1060	1135	1215	1280	1335	1390	1445					5½	34.61	7.80
	ML	880	970	1060	1135	1215	1280	1335	1390	1445	1490	1535					
	HL	880	970	1060	1135	1215	1280	1335	1390	1445	1490	1535	1580	1620			
205-15/8.15-15	NL	970	1060	1145	1225	1300	1370	1445	1500	1565					6	35.79	8.19
	ML	970	1060	1145	1225	1300	1370	1445	1500	1565	1610	1665					
	HL	970	1060	1145	1225	1300	1370	1445	1500	1565	1610	1665	1720	1765			
215-15/8.85-15	NL	1050	1145	1235	1335	1435	1500	1590	1640	1700					6	36.69	8.58
	ML	1050	1145	1235	1335	1435	1500	1590	1640	1700	1740	1800					
	HL	1050	1145	1235	1335	1435	1500	1590	1640	1700	1740	1800	1850	1910			
235-15	NL	1150	1295	1435	1545	1660	1735	1825	1895	1965					6½	38.26	9.37
	ML	1150	1295	1435	1545	1660	1735	1825	1895	1965	2035	2110					
	HL	1150	1295	1435	1545	1660	1735	1825	1895	1965	2035	2110	2180	2245			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

AIR 23 A

TABLE 1.0(D)
TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR DASH(-) RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
145-10	NL	495	525	545	565	585	605	625	640	655					4½	24.56	5.79
	ML	495	525	545	565	585	605	625	640	655	670	685					
	HL	495	525	545	565	585	605	625	640	655	670	685	700	710			
125-12	NL	405	430	445	465	480	495	505	525	535					3½	24.68	5.00
	ML	405	430	445	465	480	495	505	525	535	550	560					
	HL	405	430	445	465	480	495	505	525	535	550	560	575	580			
135-12	NL	480	510	530	550	565	585	600	620	635					4	25.53	5.39
	ML	480	510	530	550	565	585	600	620	635	650	665					
	HL	480	510	530	550	565	585	600	620	635	650	665	675	685			
145-12	NL	570	605	625	650	675	695	715	740	760					4	26.49	5.79
	ML	570	605	625	650	675	695	715	740	760	775	790					
	HL	570	605	625	650	675	695	715	740	760	775	790	805	815			
155-12	NL	630	670	695	720	745	770	795	820	840					4½	27.36	6.18
	ML	630	670	695	720	745	770	795	820	840	860	875					
	HL	630	670	695	720	745	770	795	820	840	860	875	890	905			
135-13	NL	515	545	565	590	610	630	650	670	690					4	26.53	5.39
	ML	515	545	565	590	610	630	650	670	690	705	715					
	HL	515	545	565	590	610	630	650	670	690	705	715	730	740			
145-13	NL	605	640	665	695	720	740	765	790	815					4	27.41	5.79
	ML	605	640	665	695	720	740	765	790	815	830	845					
	HL	605	640	665	695	720	740	765	790	815	830	845	855	870			
155-13	NL	670	710	735	765	790	815	840	870	895					4½	28.44	6.18
	ML	670	710	735	765	790	815	840	870	895	910	925					
	HL	670	710	735	765	790	815	840	870	895	910	925	940	955			
165-13	NL	700	750	800	850	890	930	970	1010	1050					4½	29.52	6.57
	ML	700	750	800	850	890	930	970	1010	1050	1090	1130					
	HL	700	750	800	850	890	930	970	1010	1050	1090	1130	1170	1200			
175-13	NL			810	860	920	980	1040	1100	1150					4½	30.16	6.75
	ML			810	860	920	980	1040	1100	1150	1200	1240					
	HL			810	860	920	980	1040	1100	1150	1200	1240	1300	1350			
185-13	NL			870	940	1010	1080	1140	1210	1270					5	31.42	7.25
	ML			870	940	1010	1080	1140	1210	1270	1330	1390					
	HL			870	940	1010	1080	1140	1210	1270	1330	1390	1450	1510			
195-13	NL			970	1040	1110	1180	1250	1320	1400					5½	32.38	7.70
	ML			970	1040	1110	1180	1250	1320	1400	1450	1520					
	HL			970	1040	1110	1180	1250	1320	1400	1450	1520	1580	1640			
135-14	NL	555	585	610	635	655	675	695	720	740					4	27.54	5.39
	ML	555	585	610	635	655	675	695	720	740	750	765					
	HL	555	585	610	635	655	675	695	720	740	750	765	780	790			
145-14	NL	645	680	710	735	760	785	810	840	865					4	28.34	5.79
	ML	645	680	710	735	760	785	810	840	865	885	905					
	HL	645	680	710	735	760	785	810	840	865	885	905	920	935			
155-14	NL	630	680	720	760	800	840	880	920	950					4½	29.45	6.18
	ML	630	680	720	760	800	840	880	920	950	980	1010					
	HL	630	680	720	760	800	840	880	920	950	980	1010	1040	1070			
165-14	NL	740	790	840	890	940	980	1020	1060	1100					4½	30.53	6.57
	ML	740	790	840	890	940	980	1020	1060	1100	1140	1180					
	HL	740	790	840	890	940	980	1020	1060	1100	1140	1180	1220	1250			
175-14	NL			830	900	960	1030	1100	1160	1230					5	31.49	7.00
	ML			830	900	960	1030	1100	1160	1230	1280	1350					
	HL			830	900	960	1030	1100	1160	1230	1280	1350	1400	1470			

TABLE 1.0(D) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
185-14	NL			920	1000	1070	1140	1220	1290	1360					5	32.59	7.30
	ML			920	1000	1070	1140	1220	1290	1360	1420	1500					
	HL			920	1000	1070	1140	1220	1290	1360	1420	1500	1560	1640			
195-14	NL			1020	1100	1180	1270	1340	1420	1500					5½	33.69	7.80
	ML			1020	1100	1180	1270	1340	1420	1500	1570	1650					
	HL			1020	1100	1180	1270	1340	1420	1500	1570	1650	1720	1800			
205-14	NL			1100	1180	1270	1380	1450	1540	1620					6	34.82	8.80
	ML			1100	1180	1270	1380	1450	1540	1620	1700	1770					
	HL			1100	1180	1270	1380	1450	1540	1620	1700	1770	1860	1940			
215-14	NL			1200	1300	1390	1510	1580	1670	1770					6	35.79	8.60
	ML			1200	1300	1390	1510	1580	1670	1770	1850	1920					
	HL			1200	1300	1390	1510	1580	1670	1770	1850	1920	2010	2100			
225-14	NL			1320	1420	1510	1610	1710	1800	1900					6½	36.44	8.95
	ML			1320	1420	1510	1610	1710	1800	1900	1970	2050					
	HL			1320	1420	1510	1610	1710	1800	1900	1970	2050	2150	2230			
125-15	NL	495	525	545	565	585	605	625	640	655					3½	27.69	5.00
	ML	495	525	545	565	585	605	625	640	655	670	685					
	HL	495	525	545	565	585	605	625	640	655	670	685	700	710			
135-15	NL	585	620	645	670	695	715	735	755	775					4	28.53	5.39
	ML	585	620	645	670	695	715	735	755	775	795	810					
	HL	585	620	645	670	695	715	735	755	775	795	810	825	840			
145-15	NL	680	720	750	780	805	830	855	875	895					4	29.34	5.79
	ML	680	720	750	780	805	830	855	875	895	920	940					
	HL	680	720	750	780	805	830	855	875	895	920	940	960	975			
155-15	NL	740	785	815	850	880	905	930	955	980					4½	30.45	6.18
	ML	740	785	815	850	880	905	930	955	980	1005	1025					
	HL	740	785	815	850	880	905	930	955	980	1005	1025	1045	1060			
165-15	NL	770	820	870	920	970	1020	1070	1110	1150					4½	31.45	6.57
	ML	770	820	870	920	970	1020	1070	1110	1150	1190	1230					
	HL	770	820	870	920	970	1020	1070	1110	1150	1190	1230	1270	1310			
175-15	NL			990	1050	1100	1150	1200	1250	1300					5	32.27	7.00
	ML			990	1050	1100	1150	1200	1250	1300	1350	1400					
	HL			990	1050	1100	1150	1200	1250	1300	1350	1400	1440	1480			
180-15	NL	925	980	1020	1060	1095	1130	1170	1190	1230					4½	32.04	6.62
	ML	925	980	1020	1060	1095	1130	1170	1190	1230	1260	1280					
	HL	925	980	1020	1060	1095	1130	1170	1190	1230	1260	1280	1305	1325			
185-15	NL			1000	1070	1140	1210	1280	1350	1420					5½	33.58	7.45
	ML			1000	1070	1140	1210	1280	1350	1420	1480	1540					
	HL			1000	1070	1140	1210	1280	1350	1420	1480	1540	1600	1660			
195-15	NL			1080	1160	1240	1330	1400	1470	1550					5½	34.22	7.65
	ML			1080	1160	1240	1330	1400	1470	1550	1620	1680					
	HL			1080	1160	1240	1330	1400	1470	1550	1620	1680	1760	1820			
205-15	NL			1190	1280	1370	1450	1530	1620	1700					6	35.20	8.21
	ML			1190	1280	1370	1450	1530	1620	1700	1760	1840					
	HL			1190	1280	1370	1450	1530	1620	1700	1760	1840	1920	2000			
215-15	NL			1280	1380	1480	1570	1660	1760	1860					6	36.00	8.49
	ML			1280	1380	1480	1570	1660	1760	1860	1940	2020					
	HL			1280	1380	1480	1570	1660	1760	1860	1940	2020	2100	2200			
220-15	NL			1320	1420	1520	1610	1695	1785	1875					6	36.49	8.35
	ML			1320	1420	1520	1610	1695	1785	1875	1960	2050					
	HL			1320	1420	1520	1610	1695	1785	1875	1960	2050	2135	2225			

TABLE 1.0(D) (CONTINUED)

ADE 23A

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
225-15	NL			1370	1470	1580	1670	1780	1880	1980							6½	36.94	8.98
	ML			1370	1470	1580	1670	1780	1880	1980	2060	2150							
	HL			1370	1470	1580	1670	1780	1880	1980	2060	2150	2240	2340					
230-15	NL			1405	1515	1625	1725	1825	1925	2020							6½	37.30	8.80
	ML			1405	1515	1625	1725	1825	1925	2020	2110	2190							
	HL			1405	1515	1625	1725	1825	1925	2020	2110	2190	2280	2360					
235-15	NL			1430	1540	1640	1750	1850	1960	2060							6½	37.75	9.26
	ML			1430	1540	1640	1750	1850	1960	2060	2160	2250							
	HL			1430	1540	1640	1750	1850	1960	2060	2160	2250	2350	2450					
240-15	NL			1455	1570	1680	1790	1890	1990	2090							6¾	38.28	9.05
	ML			1455	1570	1680	1790	1890	1990	2090	2190	2280							
	HL			1455	1570	1680	1790	1890	1990	2090	2190	2280	2380	2480					
185-16	NL			1140	1210	1270	1330	1390	1450	1500							5½	34.14	7.40
	ML			1140	1210	1270	1330	1390	1450	1500	1550	1600							
	HL			1140	1210	1270	1330	1390	1450	1500	1550	1600	1650	1700					
165-400	NL	800	860	920	980	1030	1080	1130	1180	1220							4.65	32.04	6.62
	ML	800	860	920	980	1030	1080	1130	1180	1220	1260	1300							
	HL	800	860	920	980	1030	1080	1130	1180	1220	1260	1300	1340	1380					

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(E)

ADR 23 A

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR "77 SERIES" BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
G77-14	NL			1250	1310	1380	1440	1500	1560	1620					6	35.04	8.45
	ML			1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL			1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
5.9-10	NL	385	430	475	515	550	580	605	630	660				4	24.00	5.80	
	ML	385	430	475	515	550	580	605	630	660	675	700					
5.9-12	NL	460	505	550	595	640	665	700	730	755				4	26.00	5.90	
	ML	460	505	550	595	640	665	700	730	755	785	810					
6.2-12	NL	485	545	605	655	705	735	775	805	835				4	27.21	6.06	
	ML	485	545	605	655	705	735	775	805	835	865	895					
	HL	485	545	605	655	705	735	775	805	835	865	895	925				950
6.2-13	NL	515	575	640	700	750	780	820	850	880				4	28.19	6.06	
	ML	515	575	640	700	750	780	820	850	880	910	945					
	HL	515	575	640	700	750	780	820	850	880	910	945	975				1005
6.5-13	NL	575	645	715	770	825	865	905	935	970				4½	29.18	6.54	
	ML	575	645	715	770	825	865	905	935	970	1005	1040					
	HL	575	645	715	770	825	865	905	935	970	1005	1040	1075				1105
6.9-13	NL	635	715	795	845	915	955	1005	1045	1085				4½	29.92	6.77	
	ML	635	715	795	845	915	955	1005	1045	1085	1120	1160					
6.2-15	NL	585	660	730	780	835	875	915	950	985				4	30.17	6.06	
	ML	585	660	730	780	835	875	915	950	985	1020	1055					
	HL	585	660	730	780	835	875	915	950	985	1020	1055	1090				1125
6.9-15	NL	705	795	880	955	1020	1070	1125	1170	1215				4½	31.93	6.77	
	ML	705	795	880	955	1020	1070	1125	1170	1215	1255	1300					
	HL	705	795	880	955	1020	1070	1125	1170	1215	1255	1300	1345				1385

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (F)

ADR 23A

TYRE LOAD RATING TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTH FOR TYPE 'R' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
5.20R10	NL	435	460	485	510	535	560	585	615	635					3½	24.84	5.20
	ML	435	460	485	510	535	560	585	615	635	660	685					
	HL	435	460	485	510	535	560	585	615	635	660	685	710	735			
5.00R12	NL	480	495	515	535	555	575	595	615	635					3½	25.62	5.04
	ML	480	495	515	535	555	575	595	615	635	650	670					
	HL	480	495	515	535	555	575	595	615	635	650	670	690	710			
5.20R12	NL	515	540	565	590	615	640	665	695	715					3½	26.79	5.20
	ML	515	540	565	590	615	640	665	695	715	740	765					
	HL	515	540	565	590	615	640	665	695	715	740	765	790	815			
5.50R12	NL	520	545	570	595	620	650	670	705	725					4	26.93	5.59
	ML	520	545	570	595	620	650	670	705	725	750	775					
	HL	520	545	570	595	620	650	670	705	725	750	775	800	825			
5.60R12	NL	600	630	655	685	715	740	770	800	825					4	27.83	5.71
	ML	600	630	655	685	715	740	770	800	825	850	875					
	HL	600	630	655	685	715	740	770	800	825	850	875	905	930			
5.00R13	NL	535	555	575	590	615	630	650	670	690					3½	26.64	5.04
	ML	535	555	575	590	615	630	650	670	690	705	725					
	HL	535	555	575	590	615	630	650	670	690	705	725	745	765			
5.20R13	NL	570	595	620	645	670	695	720	750	770					3½	27.72	5.20
	ML	570	595	620	645	670	695	720	750	770	795	820					
	HL	570	595	620	645	670	695	720	750	770	795	820	845	870			
5.50R13	NL	575	600	625	650	675	695	725	750	775					4	27.95	5.59
	ML	575	600	625	650	675	695	725	750	775	795	825					
	HL	575	600	625	650	675	695	725	750	775	795	825	850	875			
5.60R13	NL	655	685	710	740	765	795	825	855	880					4	28.92	5.71
	ML	655	685	710	740	765	795	825	855	880	905	935					
	HL	655	685	710	740	765	795	825	855	880	905	935	960	990			
6.00R13	NL	675	705	735	760	790	815	845	875	900					4	29.37	6.00
	ML	675	705	735	760	790	815	845	875	900	925	950					
	HL	675	705	735	760	790	815	845	875	900	925	950	975	1005			
5.90R13	NL	705	780	805	830	860	885	915	940	965					4	29.74	5.91
	ML	705	780	805	830	860	885	915	940	965	990	1015					
	HL	705	780	805	830	860	885	915	940	965	990	1015	1045	1070			
6.40R13	NL	810	840	870	905	940	970	1005	1040	1070					4½	31.26	6.42
	ML	810	840	870	905	940	970	1005	1040	1070	1100	1135					
	HL	810	840	870	905	940	970	1005	1040	1070	1100	1135	1165	1200			
6.50R13	NL	800	830	860	890	925	960	995	1030	1060					4½	30.75	6.60
	ML	800	830	860	890	925	960	995	1030	1060	1090	1120					
	HL	800	830	860	890	925	960	995	1030	1060	1090	1120	1150	1180			
6.70R13	NL	690	775	860	935	1000	1045	1090	1135	1175					4½	32.14	6.69
	ML	690	775	860	935	1000	1045	1090	1135	1175	1220	1260					
	HL	690	775	860	935	1000	1045	1090	1135	1175	1220	1260	1305	1340			
7.00R13	NL	870	910	950	985	1025	1060	1100	1145	1175					5	31.88	7.10
	ML	870	910	950	985	1025	1060	1100	1145	1175	1215	1255					
	HL	870	910	950	985	1025	1060	1100	1145	1175	1215	1255	1295	1335			
7.25R13	NL	940	980	1020	1060	1100	1135	1175	1215	1255					5	32.51	7.24
	ML	940	980	1020	1060	1100	1135	1175	1215	1255	1290	1330					
	HL	940	980	1020	1060	1100	1135	1175	1215	1255	1290	1330	1370	1410			
5.20R14	NL	605	640	670	700	730	760	795	830	855					3½	28.89	5.20
	ML	605	640	670	700	730	760	795	830	855	885	915					
	HL	605	640	670	700	730	760	795	830	855	885	915	950	980			

TABLE 1.0(F) (CONTINUED)

ADR 23A

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (P.S.I.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
5.90R14	NL	750	785	815	845	875	905	935	970	995					4	30.76	5.91
	ML	750	785	815	845	875	905	935	970	995	1025	1055					
	HL	750	785	815	845	875	905	935	970	995	1025	1055	1085 1115				
7.00R14	NL	925	960	1000	1040	1075	1115	1155	1195	1235				5	32.88	7.10	
	ML	925	960	1000	1040	1075	1115	1155	1195	1235	1270	1320					
	HL	925	960	1000	1040	1075	1115	1155	1195	1235	1270	1320	1350 1380				
7.50R14	NL	1065	1100	1140	1180	1220	1260	1300	1340	1380				5½	34.19	7.65	
	ML	1065	1100	1140	1180	1220	1260	1300	1340	1380	1415	1460					
	HL	1065	1100	1140	1180	1220	1260	1300	1340	1380	1415	1460	1500 1540				
5.60R15	NL	705	780	805	830	860	885	915	940	965				4	30.87	5.71	
	ML	705	780	805	830	860	885	915	940	965	990	1015					
	HL	705	780	805	830	860	885	915	940	965	990	1015	1045 1070				
6.40R15	NL	885	925	965	1005	1040	1080	1120	1160	1200				4½	33.26	6.42	
	ML	885	925	965	1005	1040	1080	1120	1160	1200	1235	1275					
	HL	885	925	965	1005	1040	1080	1120	1160	1200	1235	1275	1310 1350				
6.70R15	NL	975	1015	1055	1095	1130	1170	1215	1255	1290				4½	33.95	7.00	
	ML	975	1015	1055	1095	1130	1170	1215	1255	1290	1325	1365					
	HL	975	1015	1055	1095	1130	1170	1215	1255	1290	1325	1365	1405 1445				
7.60R15	NL	1160	1200	1245	1285	1325	1370	1415	1465	1500				5½	36.00	7.90	
	ML	1160	1200	1245	1285	1325	1370	1415	1465	1500	1535	1575					
	HL	1160	1200	1245	1285	1325	1370	1415	1465	1500	1535	1575	1610 1655				

TABLE 1.0(G)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '70 SERIES' TYPE 'R' RADIAL PLY TYRE

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
AR70-12	NL	720	770	810	860	900	940	980	1020	1060					5½	29.74	7.50
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
ZR70-12	NL	640	700	750	790	830	860	900	940	970					5	28.81	7.05
	ML	640	700	750	790	830	860	900	940	970	1010	1040					
	HL	640	700	750	790	830	860	900	940	970	1010	1040	1080	1110			
AR70-13	NL	720	770	810	860	900	940	980	1020	1060				5	30.04	7.15	
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160				1200
BR70-13	NL	780	840	890	930	980	1030	1070	1110	1150				5½	31.04	7.60	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
CR70-13	NL	840	890	950	1000	1050	1100	1140	1190	1230				5½	31.65	7.85	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
DR70-13	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5½	32.29	8.95	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
WR70-13	NL	565	605	640	680	710	740	770	800	830				4½	27.97	6.25	
	ML	565	605	640	680	710	740	770	800	830	860	890					
	HL	565	605	640	680	710	740	770	800	830	860	890	920				945
YR70-13	NL	600	650	690	730	770	810	840	870	900				4.50	28.56	6.50	
	ML	600	650	690	730	770	810	840	870	900	930	960					
	HL	600	650	690	730	770	810	840	870	900	930	960	990				1020
ZR70-13	NL	640	700	750	790	830	860	900	940	970				5	29.33	6.90	
	ML	640	700	750	790	830	860	900	940	970	1010	1040					
	HL	640	700	750	790	830	860	900	940	970	1010	1040	1080				1110
AR70-14	NL	720	770	810	860	900	940	980	1020	1060				5	30.60	7.00	
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160				1200
BR70-14	NL	780	840	890	930	980	1030	1070	1110	1150				5½	31.52	7.45	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
CR70-14	NL	840	890	950	1000	1050	1100	1140	1190	1230				5½	32.23	7.65	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
DR70-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5½	32.78	7.90	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
ER70-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				5½	33.34	8.10	
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540				1580
FR70-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				6	34.34	8.55	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650				1700
GR70-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				6	35.12	8.85	
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780				1830
HR70-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				6½	36.31	9.40	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950				2010
JR70-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860				6½	36.86	9.55	
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040				2100

TABLE 1.0(G) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
LR70-14	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					6 1/2	37.59	9.80
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			
BR70-15	NL	780	840	890	930	980	1030	1070	1110	1150				5	31.92	7.10	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
CR70-15	NL	840	890	950	1000	1050	1100	1140	1190	1230				5 1/2	32.74	7.50	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
DR70-15	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5 1/2	33.34	7.75	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
ER70-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				5 1/2	33.91	7.90	
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540				1580
FR70-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				6	34.87	8.40	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650				1700
GR70-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				6	35.65	8.65	
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780				1830
HR70-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				6 1/2	36.83	9.20	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950				2010
JR 70-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860				6 1/2	37.31	9.40	
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040				2100
KR70-15	NL	1290	1380	1460	1540	1620	1690	1770	1830	1900				6 1/2	37.62	9.50	
	ML	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030					
	HL	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030	2090				2150
LR70-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970				6 1/2	38.06	9.65	
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170				2230
MR70-15	NL	1420	1520	1610	1700	1780	1860	1940	2020	2090				7	38.93	10.15	
	ML	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230					
	HL	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230	2300				2370

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(H)

ADR 23A

THE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR TYPE "R" RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
145R10	NL	465	495	525	550	580	605	630	655	680					4	24.56	5.79
	ML	465	495	525	550	580	605	630	655	680	700	725					
	HL	465	495	525	550	580	605	630	655	680	700	725	750	770			
125R12	NL	370	400	430	450	475	495	515	535	555				3½	24.68	5.00	
	ML	370	400	430	450	475	495	515	535	555	575	595					
	HL	370	400	430	450	475	495	515	535	555	575	595	610				630
135R12	NL	440	475	505	535	560	585	610	635	655				4	25.53	5.39	
	ML	440	475	505	535	560	585	610	635	655	680	700					
	HL	440	475	505	535	560	585	610	635	655	680	700	725				745
145R12	NL	530	565	600	635	665	695	725	755	780				4	26.49	5.79	
	ML	530	565	600	635	665	695	725	755	780	810	835					
	HL	530	565	600	635	665	695	725	755	780	810	835	860				885
155R12	NL	590	630	665	700	735	770	800	835	865				4½	27.36	6.18	
	ML	590	630	665	700	735	770	800	835	865	895	925					
	HL	590	630	665	700	735	770	800	835	865	895	925	950				980
135R13	NL	480	515	545	575	600	630	655	680	705				4	26.53	5.39	
	ML	480	515	545	575	600	630	655	680	705	730	755					
	HL	480	515	545	575	600	630	655	680	705	730	755	780				800
145R13	NL	590	630	665	700	735	770	800	835	860				4	27.41	5.79	
	ML	590	630	665	700	735	770	800	835	860	890	920					
	HL	590	630	665	700	735	770	800	835	860	890	920	950				980
155R13	NL	645	690	730	770	810	845	885	915	950				4½	28.44	6.18	
	ML	645	690	730	770	810	845	885	915	950	985	1015					
	HL	645	690	730	770	810	845	885	915	950	985	1015	1045				1075
165R13	NL	680	730	770	820	860	900	930	970	1010				4½	29.18	6.40	
	ML	680	730	770	820	860	900	930	970	1010	1040	1080					
	HL	680	730	770	820	860	900	930	970	1010	1040	1080	1110				1140
175R13	NL	790	840	890	930	980	1030	1070	1110	1150				4½	30.16	6.75	
	ML	790	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	790	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
185R13	NL	870	930	980	1030	1080	1130	1180	1230	1270				5	31.42	7.25	
	ML	870	930	980	1030	1080	1130	1180	1230	1270	1310	1360					
	HL	870	930	980	1030	1080	1130	1180	1230	1270	1310	1360	1400				1440
195R13	NL	955	1010	1060	1110	1170	1220	1280	1320	1370				5½	32.38	7.70	
	ML	955	1010	1060	1110	1170	1220	1280	1320	1370	1420	1470					
	HL	955	1010	1060	1110	1170	1220	1280	1320	1370	1420	1470	1510				1550
135R14	NL	515	550	585	615	645	675	705	730	760				4	27.54	5.39	
	ML	515	550	585	615	645	675	705	730	760	785	810					
	HL	515	550	585	615	645	675	705	730	760	785	810	835				860
145R14	NL	595	635	675	715	750	785	815	850	880				4	28.34	5.79	
	ML	595	635	675	715	750	785	815	850	880	910	940					
	HL	595	635	675	715	750	785	815	850	880	910	940	965				995
155R14	NL	690	740	780	820	860	900	940	970	1010				4	29.51	6.05	
	ML	690	740	780	820	860	900	940	970	1010	1040	1080					
	HL	690	740	780	820	860	900	940	970	1010	1040	1080	1110				1140
165R14	NL	760	810	860	910	960	1000	1040	1080	1120				4½	30.65	6.55	
	ML	760	810	860	910	960	1000	1040	1080	1120	1160	1200					
	HL	760	810	860	910	960	1000	1040	1080	1120	1160	1200	1240				1270
175R14	NL	840	900	950	1000	1050	1100	1140	1190	1230				5	31.49	7.00	
	ML	840	900	950	1000	1050	1100	1140	1190	1230	1270	1310					
	HL	840	900	950	1000	1050	1100	1140	1190	1230	1270	1310	1350				1390

TABLE 1.0(H) (Continued)

ADR 23A

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width inch. (ins)	Min. size factor inch. (ins)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
185R14	NL	920	980	1040	1100	1160	1210	1260	1310	1360					5	32.59	7.30
	ML	920	980	1040	1100	1160	1210	1260	1310	1360	1400	1450					
	HL	920	980	1040	1100	1160	1210	1260	1310	1360	1400	1450	1490	1540			
195R14	NL	1020	1090	1150	1210	1270	1330	1390	1440	1500					5½	33.69	7.80
	ML	1020	1090	1150	1210	1270	1330	1390	1440	1500	1550	1600					
	HL	1020	1090	1150	1210	1270	1330	1390	1440	1500	1550	1600	1650	1690			
205R14	NL	1110	1190	1250	1310	1380	1440	1500	1560	1620					6	34.82	8.30
	ML	1110	1190	1250	1310	1380	1440	1500	1560	1620	1670	1730					
	HL	1110	1190	1250	1310	1380	1440	1500	1560	1620	1670	1730	1780	1830			
215R14	NL	1210	1290	1360	1430	1510	1580	1640	1710	1770					6	35.79	8.60
	ML	1210	1290	1360	1430	1510	1580	1640	1710	1770	1830	1890					
	HL	1210	1290	1360	1430	1510	1580	1640	1710	1770	1830	1890	1950	2000			
225R14	NL	1270	1350	1430	1510	1580	1660	1730	1790	1860					6½	36.44	8.95
	ML	1270	1350	1430	1510	1580	1660	1730	1790	1860	1920	1990					
	HL	1270	1350	1430	1510	1580	1660	1730	1790	1860	1920	1990	2050	2100			
125R13	NL	460	490	520	550	575	605	630	655	680					3½	27.69	5.00
	ML	460	490	520	550	575	605	630	655	680	705	725					
	HL	460	490	520	550	575	605	630	655	680	705	725	745	770			
135R15	NL	545	580	615	650	680	715	745	775	800					4	28.53	5.39
	ML	545	580	615	650	680	715	745	775	800	830	855					
	HL	545	580	615	650	680	715	745	775	800	830	855	880	910			
145R15	NL	640	680	720	760	795	830	865	900	935					4	29.34	5.79
	ML	640	680	720	760	795	830	865	900	935	965	995					
	HL	640	680	720	760	795	830	865	900	935	965	995	1025	1055			
155R15	NL	690	735	780	825	865	905	940	980	1015					4½	30.45	6.18
	ML	690	735	780	825	865	905	940	980	1015	1050	1085					
	HL	690	735	780	825	865	905	940	980	1015	1050	1085	1115	1150			
165R15	NL	770	820	870	910	960	1000	1050	1090	1130					4½	31.18	6.40
	ML	770	820	870	910	960	1000	1050	1090	1130	1170	1200					
	HL	770	820	870	910	960	1000	1050	1090	1130	1170	1200	1240	1270			
175R15	NL	840	900	950	1000	1050	1100	1140	1190	1230					5	32.27	6.90
	ML	840	900	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	900	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1390			
185R15	NL	950	1010	1070	1130	1180	1240	1290	1340	1390					5½	33.58	7.45
	ML	950	1010	1070	1130	1180	1240	1290	1340	1390	1440	1480					
	HL	950	1010	1070	1130	1180	1240	1290	1340	1390	1440	1480	1530	1570			
195R15	NL	1020	1090	1150	1210	1270	1330	1380	1440	1490					5½	34.22	7.65
	ML	1020	1090	1150	1210	1270	1330	1380	1440	1490	1540	1590					
	HL	1020	1090	1150	1210	1270	1330	1380	1440	1490	1540	1590	1640	1690			
205R15	NL	1100	1170	1240	1300	1370	1430	1490	1550	1610					6	35.20	8.21
	ML	1100	1170	1240	1300	1370	1430	1490	1550	1610	1660	1720					
	HL	1100	1170	1240	1300	1370	1430	1490	1550	1610	1660	1720	1770	1820			
215R15	NL	1190	1270	1340	1410	1480	1550	1620	1680	1740					6	36.00	8.49
	ML	1190	1270	1340	1410	1480	1550	1620	1680	1740	1800	1860					
	HL	1190	1270	1340	1410	1480	1550	1620	1680	1740	1800	1860	1920	1970			
225R15	NL	1270	1350	1430	1510	1580	1650	1720	1790	1860					6½	36.94	8.98
	ML	1270	1350	1430	1510	1580	1650	1720	1790	1860	1920	1980					
	HL	1270	1350	1430	1510	1580	1650	1720	1790	1860	1920	1980	2040	2100			
235R15	NL	1340	1430	1510	1600	1680	1750	1830	1900	1970					6½	37.75	9.26
	ML	1340	1430	1510	1600	1680	1750	1830	1900	1970	2030	2100					
	HL	1340	1430	1510	1600	1680	1750	1830	1900	1970	2030	2100	2160	2230			
175R16	NL	920	980	1040	1100	1160	1210	1260	1310	1360					5	33.49	7
	ML	920	980	1040	1100	1160	1210	1260	1310	1360	1400	1450					
	HL	920	980	1040	1100	1160	1210	1260	1310	1360	1400	1450	1490	1540			
205R16	NL	1100	1170	1240	1300	1370	1430	1490	1550	1610					6	36.52	8.19
	ML	1100	1170	1240	1300	1370	1430	1490	1550	1610	1660	1720					
	HL	1100	1170	1240	1300	1370	1430	1490	1550	1610	1660	1720	1770	1820			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 23A

TABLE 1.0 (J)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '78 SERIES' BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38			
A78-13	NL	720	770	810	860	900	940	980	1020	1060	1090	1130		4½	29.74	6.60
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200		
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200		
E78-13	NL	780	840	890	930	980	1030	1070	1110	1150				5	30.72	7.05
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230				
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300		
C78-13	NL	840	890	950	1000	1050	1100	1140	1190	1230				5½	31.56	7.45
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320				
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400		
E78-14	NL	780	840	890	930	980	1030	1070	1110	1150				4½	31.04	6.65
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230				
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300		
C78-14	NL	840	890	950	1000	1050	1100	1140	1190	1230				5	31.95	7.05
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320				
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400		
D78-13	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5½	32.18	7.70
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410				
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490		
D78-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5	32.52	7.35
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410				
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490		
E78-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				5½	33.29	7.65
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490				
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580		
F78-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				5½	34.04	7.90
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610				
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700		
G78-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				6	35.02	8.35
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730				
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830		
E78-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				6	36.06	8.70
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890				
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010		
J78-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860				6	36.58	8.80
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980				
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100		
A78-15	NL	720	770	810	860	900	940	980	1020	1060				4½	30.85	6.35
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130				
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200		
C78-15	NL	840	890	950	1000	1050	1100	1140	1190	1230				5	32.45	6.95
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320				
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400		
D78-15	NL	890	950	1010	1070	1120	1170	1220	1270	1320				5	33.05	7.15
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410				
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490		
E78-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				5	33.65	7.35
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490				
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580		
F78-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				5½	34.56	7.70
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610				
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700		

TABLE 1.0(J) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
G78-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					5½	35.36	8.05
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
H78-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					6	36.50	8.55
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
J78-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					6	37.02	8.70
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
L78-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					6	37.73	8.85
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			
N78-15	NL	1500	1600	1700	1790	1880	1970	2050	2130	2210					7	39.50	9.80
	ML	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360					
	HL	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360	2430	2500			
Y78-12	NL	600	650	690	730	770	810	840	870	900					4½	27.90	6.35
	HL	600	650	690	730	770	810	840	870	900	930	960					
Y78-13	NL	600	650	690	730	770	810	840	870	900					4½	28.44	6.20
	HL	600	650	690	730	770	810	840	870	900	930	960					
Z78-12	NL	640	700	750	790	830	860	900	940	970					4½	28.52	6.55
	HL	640	700	750	790	830	860	900	940	970	1010	1040					
Z78-13	NL	640	700	750	790	830	860	900	940	970					4½	29.04	6.40
	HL	640	700	750	790	830	860	900	940	970	1010	1040					
B78-15	NL	780	840	850	930	980	1030	1070	1110	1150					4½	31.62	6.55
	ML	780	840	850	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	850	930	980	1030	1070	1110	1150	1190	1230	1270	1300			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(K)

ADR 23A

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR "60 SERIES" BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
A60-13	NL	720	770	810	860	900	940	980	1020	1060					5½	30.00	7.85
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
B60-13	NL	780	840	890	930	980	1030	1070	1110	1150				6	30.95	8.35	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
C60-13	NL	840	890	950	1000	1050	1100	1140	1190	1230				6	31.58	8.60	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
J60-13	NL	890	950	1010	1070	1120	1170	1220	1270	1320				6	32.20	8.85	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
D60-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320				6	32.72	8.85	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				1490
E60-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				7	33.69	9.30	
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540				1580
F60-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				7	34.44	9.55	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650				1700
G60-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				7	35.23	9.85	
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780				1830
H60-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				7	36.20	10.25	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950				2010
J60-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860				7	36.70	10.45	
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040				2100
L60-14	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970				8	37.83	11.10	
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170				2230
B60-15	NL	780	840	890	930	980	1030	1070	1110	1150				5½	31.65	7.80	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270				1300
C60-15	NL	840	890	950	1000	1050	1100	1140	1190	1230				6	32.66	8.25	
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360				1400
E60-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400				6	33.83	8.70	
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540				1580
F60-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				7	34.75	9.40	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650				1700
G60-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620				7	35.73	9.70	
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780				1830
E60-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				7	36.70	10.05	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950				2010

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
J60-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					7	37.20	10.25
	FL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
L60-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					7	37.91	10.50
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (L)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR SERIES 50 CANTILEVERED SIDEWALL TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
E50C-16	NL			1070	1130	1190	1240	1300	1350	1400					3½	33.31	7.95
	ML			1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL			1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
F50C-16	NL			1160	1220	1280	1340	1400	1450	1500					3½	34.04	8.20
	ML			1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL			1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
G50C-17	NL			1250	1310	1380	1440	1500	1560	1620					3½	35.34	8.45
	ML			1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL			1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
H50C-17	NL			1360	1440	1510	1580	1650	1710	1770					3½	36.30	8.80
	ML			1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL			1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
L50C-18	NL			1520	1600	1680	1750	1830	1900	1970					3½	38.00	9.10
	ML			1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL			1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 23A

TABLE 1.0 (4)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR "78 SERIES" RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
2R78-12	NL	640	700	750	790	830	860	900	940	970					4½	28.34	6.45
	NL	640	700	750	790	830	860	900	940	970	1010	1040					
	HL	640	700	750	790	830	860	900	940	970	1010	1040	1080	1110			
YR78-12	NL	600	650	690	730	770	810	840	870	900					4	27.51	6.05
	NL	600	650	690	730	770	810	840	870	900	930	960					
	HL	600	650	690	730	770	810	840	870	900	930	960	990	1020			
AR78-13	NL	720	770	810	860	900	940	980	1020	1060					4½	29.55	6.50
	NL	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
BR78-13	NL	780	840	890	930	980	1030	1070	1110	1150					4½	30.31	6.75
	NL	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR78-13	NL	840	890	950	1000	1050	1100	1140	1190	1230					5	31.13	7.15
	NL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
YR78-13	NL	600	650	690	730	770	810	840	870	900					4	28.02	5.90
	NL	600	650	690	730	770	810	840	870	900	930	960					
	HL	600	650	690	730	770	810	840	870	900	930	960	990	1020			
2R78-13	NL	640	700	750	790	830	860	900	940	970					4½	28.85	6.30
	NL	640	700	750	790	830	860	900	940	970	1010	1040					
	HL	640	700	750	790	830	860	900	940	970	1010	1040	1080	1110			
BR78-14	NL	780	840	890	930	980	1030	1070	1110	1150					4½	30.84	6.60
	NL	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR78-14	NL	840	890	950	1000	1050	1100	1140	1190	1230					5	31.67	7.00
	NL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
DR78-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320					5	32.26	7.20
	NL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
ER78-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					5	32.86	7.40
	NL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
FR78-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					5½	33.78	7.85
	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
GR78-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					6	34.78	8.30
	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
HR78-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					6	35.77	8.60
	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
JR78-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					6½	36.47	8.95
	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
YR78-14	NL	600	650	690	730	770	810	840	870	900					4	28.58	5.75
	NL	600	650	690	730	770	810	840	870	900	930	960					
	HL	600	650	690	730	770	810	840	870	900	930	960	990	1020			
AR78-15	NL	720	770	810	860	900	940	980	1020	1060					4½	30.66	6.25
	NL	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			

TABLE 1.0(M) (CONTINUED)

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
BR78-15	NL	780	840	890	930	980	1030	1070	1110	1150					4½	31.38	6.45
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR78-15	NL	840	890	950	1000	1050	1100	1140	1190	1230					5	32.24	6.85
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
WR78-15	NL			640	680	710	740	770	800	830					4	28.59	5.45
	ML			640	680	710	740	770	800	830	860	890					
	HL			640	680	710	740	770	800	830	860	890	920	940			
ER78-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					5½	33.58	7.45
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
FR78-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					5½	34.28	7.70
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
GR78-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					6	35.30	8.15
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
HR78-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					6	36.23	8.45
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
JR78-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					6½	36.98	8.80
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
LR78-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					6½	37.66	9.00
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			
MR78-15	NL	1420	1520	1610	1700	1780	1860	1940	2020	2090					6½	38.35	9.20
	ML	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230					
	HL	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230	2300	2370			
NR78-15	NL	1500	1600	1700	1790	1880	1970	2050	2130	2210					7	39.17	9.7
	ML	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360					
	HL	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360	2430	2500			
ZR78-15	NL	640	700	750	790	830	860	900	940	970					4	29.76	5.80
	ML	640	700	750	790	830	860	900	940	970	1010	1040					
	HL	640	700	750	790	830	860	900	940	970	1010	1040	1080	1110			

TABLE 1.0(N)
 TYRE LOAD RATING TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS
 FOR '70 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)													Test rim width (ins)	Min. size factor (ins)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38	40			
165/70R10	NL	585	600	615	630	650	665	680	700	715	730	745	760	780	4½	25.50	6.50
	ML	585	600	615	630	650	665	680	700	715	730	745	760				
	HL	585	600	615	630	650	665	680	700	715	730	745	760				
145/70R12	NL	500	515	535	550	570	590	605	620	640	660	675	695	710	4	25.50	5.67
	ML	500	515	535	550	570	590	605	620	640	660	675	695				
	HL	500	515	535	550	570	590	605	620	640	660	675	695				
155/70R12	NL	580	595	615	630	650	665	685	700	720	735	750	765	780	4	26.13	5.93
	ML	580	595	615	630	650	665	685	700	720	735	750	765				
	HL	580	595	615	630	650	665	685	700	720	735	750	765				
165/70R12	NL	665	680	700	720	740	760	780	795	815	835	850	870	890	4½	27.43	6.50
	ML	665	680	700	720	740	760	780	795	815	835	850	870				
	HL	665	680	700	720	740	760	780	795	815	835	850	870				
175/70R12	NL			780	805	830	855	880	900	925	950	970	995	1020	5	28.2	6.92
	ML			780	805	830	855	880	900	925	950	970	995				
	HL			780	805	830	855	880	900	925	950	970	995				
145/70R13	NL	545	560	580	600	615	630	650	665	685	700	720	735	750	4	26.44	5.67
	ML	545	560	580	600	615	630	650	665	685	700	720	735				
	HL	545	560	580	600	615	630	650	665	685	700	720	735				
155/70R13	NL	630	650	665	685	705	725	740	760	780	800	820	835	855	4	27.17	5.93
	ML	630	650	665	685	705	725	740	760	780	800	820	835				
	HL	630	650	665	685	705	725	740	760	780	800	820	835				
165/70R13	NL			750	770	795	815	835	860	880	900	920	940	960	4½	28.45	6.50
	ML			750	770	795	815	835	860	880	900	920	940				
	HL			750	770	795	815	835	860	880	900	920	940				
175/70R13	NL			845	865	890	910	935	955	980	1000	1025	1045	1070	5	29.31	6.92
	ML			845	865	890	910	935	955	980	1000	1025	1045				
	HL			845	865	890	910	935	955	980	1000	1025	1045				
185/70R13	NL			940	965	990	1015	1040	1065	1090	1115	1140	1165	1190	5	30.39	7.31
	ML			940	965	990	1015	1040	1065	1090	1115	1140	1165				
	HL			940	965	990	1015	1040	1065	1090	1115	1140	1165				
195/70R13	NL			1045	1070	1100	1125	1155	1180	1210	1240	1265	1290	1320	5½	31.20	7.74
	ML			1045	1070	1100	1125	1155	1180	1210	1240	1265	1290				
	HL			1045	1070	1100	1125	1155	1180	1210	1240	1265	1290				
205/70R13	NL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490	5½	32.2	8.05
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450				
155/70R14	NL			700	720	740	760	780	795	815	835	850	870	890	4	28.15	5.93
	ML			700	720	740	760	780	795	815	835	850	870				
	HL			700	720	740	760	780	795	815	835	850	870				
165/70R14	NL			725	765	800	835	875	905	940	970	1005	1035	1065	4½	29.31	6.50
	ML			725	765	800	835	875	905	940	970	1005	1035				
	HL			725	765	800	835	875	905	940	970	1005	1035				
175/70R14	NL			880	905	925	950	975	1000	1025	1050	1075	1100	1125	5	30.33	6.92
	ML			880	905	925	950	975	1000	1025	1050	1075	1100				
	HL			880	905	925	950	975	1000	1025	1050	1075	1100				
185/70R14	NL			990	1015	1045	1070	1100	1130	1155	1180	1210	1235	1265	5	31.39	7.31
	ML			990	1015	1045	1070	1100	1130	1155	1180	1210	1235				
	HL			990	1015	1045	1070	1100	1130	1155	1180	1210	1235				
195/70R14	NL			1090	1120	1155	1185	1220	1250	1280	1310	1340	1375	1405	5½	32.30	7.74
	ML			1090	1120	1155	1185	1220	1250	1280	1310	1340	1375				
	HL			1090	1120	1155	1185	1220	1250	1280	1310	1340	1375				

TYRE LOAD RATING TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR '70 SERIES' RADIAL FLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)													Test rim width (ins)	Min. size factor (ins)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38	40			
205/70R14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					5½	33.42	8.10
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
215/70R14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					6	34.34	8.55
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
225/70R14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					6	35.12	8.85
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
155/70R15	NL	690	710	730	750	770	790	810	830	850					4	29.20	5.93
	ML	690	710	730	750	770	790	810	830	850	870	890					
	HL	690	710	730	750	770	790	810	830	850	870	890	910	930			
175/70R15	NL			940	965	990	1015	1040	1065	1090					5	31.36	6.92
	ML			940	965	990	1015	1040	1065	1090	1115	1140					
	HL			940	965	990	1015	1040	1065	1090	1115	1140	1165	1190			
135/70R15	NL			1040	1070	1100	1130	1155	1180	1210					5	32.34	7.31
	ML			1040	1070	1100	1130	1155	1180	1210	1235	1265					
	HL			1040	1070	1100	1130	1155	1180	1210	1235	1265	1290	1320			
195/70R15	NL	890	950	1010	1070	1120	1170	1220	1270	1320					5½	33.34	7.75
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
205/70R15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					5½	33.91	7.95
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
215/70R15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					6	34.87	8.40
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
225/70R15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					6	35.65	8.65
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
235/70R15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					6½	36.83	9.20
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 23A

TABLE 1.0(O)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR 'LOW SECTION' TYPE 'R' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
14OR12	NL			490	520	550	580	610	640	660	690	710			4	26.2	5.40
	ML			490	520	550	580	610	640	660	690	710	740	770			
	HL			490	520	550	580	610	640	660	690	710	740	770			
15OR12	NL			570	610	640	670	700	730	760	790	820			4	27.19	5.75
	ML			570	610	640	670	700	730	760	790	820	850	880			
	HL			570	610	640	670	700	730	760	790	820	850	880			
15OR13	NL			600	640	680	720	750	780	810	840	870			4	28.17	5.75
	ML			600	640	680	720	750	780	810	840	870	900	940			
	HL			600	640	680	720	750	780	810	840	870	900	940			
16OR13	NL			670	700	740	780	820	860	900	940	980			4½	29.23	6.25
	ML			670	700	740	780	820	860	900	940	980	1010	1040			
	HL			670	700	740	780	820	860	900	940	980	1010	1040			
17OR13	NL			720	760	800	840	880	920	960	1000	1040			5	30.08	6.60
	ML			720	760	800	840	880	920	960	1000	1040	1080	1110			
	HL			720	760	800	840	880	920	960	1000	1040	1080	1110			
15OR14	NL			640	670	710	750	780	820	860	900	940			4	29.16	5.75
	ML			640	670	710	750	780	820	860	900	940	970	1000			
	HL			640	670	710	750	780	820	860	900	940	970	1000			
18OR15	NL			920	970	1020	1070	1120	1170	1230	1280	1330			5	32.97	6.85
	ML			920	970	1020	1070	1120	1170	1230	1280	1330	1380	1430			
	HL			920	970	1020	1070	1120	1170	1230	1280	1330	1380	1430			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(P)

TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR SERIES 45 CANTILEVERED SIDEWALL TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
G45C-16	NL			1250	1310	1380	1440	1500	1560	1620					5	35.53	9.70
	ML			1250	1310	1380	1440	1500	1560	1620	1680						
	HL			1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			

TABLE 1.0(R)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '60 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)													Test rim width (inches)	Minimum size factor (inches)	Section width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38	40			
AR60-13	NL	720	770	810	860	900	940	980	1020	1060					5½	30.00	7.35
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
BR60-13	NL	780	840	890	930	980	1030	1070	1110	1150					6	30.95	8.35
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR60-13	NL	840	890	950	1000	1050	1100	1140	1190	1230					6	31.58	8.60
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
DR60-13	NL	890	950	1010	1070	1120	1170	1220	1270	1320					6½	32.40	9.05
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
ER60-13	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					6	32.81	9.05
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
ER60-13	NL	950	1010	1070	1130	1190	1290	1300	1350	1400					6½	33.01	9.25
	ML	950	1010	1070	1130	1190	1290	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1290	1300	1350	1400	1440	1490	1540	1580			
AR60-14	NL	720	770	810	860	900	940	980	1020	1060					5½	30.54	7.70
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
ER60-14	NL	780	840	890	930	980	1030	1070	1110	1150					5½	31.27	8.00
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR60-14	NL	840	890	950	1000	1050	1100	1140	1190	1230					6	32.10	8.45
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
DR60-14	NL	890	950	1010	1070	1120	1170	1220	1270	1320					6	32.72	8.65
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
ER60-14	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					6½	33.50	9.10
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
FR60-14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					6½	34.25	9.35
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
GR60-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					7	35.24	9.85
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
HR60-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					7	36.20	10.25
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
JR60-14	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					7	36.71	10.45
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
LR60-14	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					8	37.84	11.10
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			
AR60-15	NL	720	770	810	860	900	940	980	1020	1060					5	30.90	7.35
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			

TABLE 1.0(R) (CONTINUED)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '60 SERIES' RADIAL FLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
BR60-15	NL	780	840	890	930	980	1030	1070	1110	1150					5½	31.85	7.80
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
CR60-15	NL	840	890	950	1000	1050	1100	1140	1190	1230					5½	32.46	8.05
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
DR60-15	NL	890	950	1010	1070	1120	1170	1220	1270	1320					6	33.25	8.50
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
ER60-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400					6	33.84	8.70
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490					
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580			
FR60-15	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500					6½	34.75	9.20
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
GR60-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					6½	35.52	9.50
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
HR60-16	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					7	36.70	10.05
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
JR60-15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					7	37.20	10.29
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
LR60-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					7	37.91	10.50
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(S)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR '60 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
185/60 R 13	NL			780	815	845	880	915	945	980					5	28.61	7.28
	ML			780	815	845	880	915	945	980	1010	1045					
	HL			780	815	845	880	915	945	980	1010	1045	1075	1110			
205/60 R 14	NL	780	840	890	930	980	1030	1070	1110	1150				6	31.62	8.19	
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
245/60 R 14	NL	1020	1090	1160	1220	1280	1340	1400	1450	1500				6 1/2	34.25	9.35	
	ML	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610					
	HL	1020	1090	1160	1220	1280	1340	1400	1450	1500	1550	1610	1650	1700			
265/60 R 14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				7	36.20	10.25	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
215/60 R 15	NL	890	950	1010	1070	1120	1170	1220	1270	1320				6	33.25	8.50	
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			
235/60 R 15	NL	1035	1105	1175	1235	1300	1360	1415	1470	1525				7	34.73	9.25	
	ML	1035	1105	1175	1235	1300	1360	1415	1470	1525	1575	1630					
	HL	1035	1105	1175	1235	1300	1360	1415	1470	1525	1575	1630	1680	1725			
255/60 R 15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770				7	36.70	10.05	
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			

*Amended March 1985

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 23A

TABLE 1.0(T)

DELETED

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(U)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTH FOR "60 SERIES" CANTILEVERED TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (ins)	Min. size factor (ins)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
C60C-15	NL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400	4	31.92	7.35
	NL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			

TABLE 1.0(V)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR SERIES "50" BIAS PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)			
		16	18	20	22	24	26	28	30	32	34	36	38				40		
B50-13	NL	780	840	890	930	980	1030	1070	1110	1150							6½	30.84	9.15
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230							
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300					
F50-14	NL	1020	1090	1160	1220	1280	1310	1400	1450	1500							7	34.10	10.20
	ML	1020	1090	1160	1220	1280	1310	1400	1450	1500	1550	1610							
	HL	1020	1090	1160	1220	1280	1310	1400	1450	1500	1550	1610	1650	1700					
G50-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620							8	35.29	10.95
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730							
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830					
H50-14	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770							8	36.24	11.35
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890							
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010					
J50-14	NL	1420	1520	1610	1700	1780	1860	1940	2020	2090							9	38.51	12.55
	ML	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230							
	HL	1420	1520	1610	1700	1780	1860	1940	2020	2090	2160	2230	2300	2370					
K50-14	NL	1500	1600	1700	1790	1880	1970	2050	2130	2210							9	39.17	12.85
	ML	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360							
	HL	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360	2430	2500					
L50-15	NL	950	1010	1070	1130	1190	1240	1300	1350	1400							6½	33.74	9.50
	ML	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490							
	HL	950	1010	1070	1130	1190	1240	1300	1350	1400	1440	1490	1540	1580					
M50-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620							7	35.38	10.35
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730							
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830					
N50-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770							8	36.76	11.15
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890							
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010					
O50-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970							8	37.94	11.65
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100							
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230					
P50-15	NL	1500	1600	1700	1790	1880	1970	2050	2130	2210							9	39.65	12.65
	ML	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360							
	HL	1500	1600	1700	1790	1880	1970	2050	2130	2210	2280	2360	2430	2500					

TABLE 1 -TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (W)

TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR '50 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
BR50-13	NL	780	840	890	930	980	1030	1070	1110	1150					6½	30.84	9.15
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
GR50-14	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					8	35.29	10.95
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
GR50-15	NL	1100	1180	1250	1310	1380	1440	1500	1560	1620					7	35.38	10.35
	ML	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730					
	HL	1100	1180	1250	1310	1380	1440	1500	1560	1620	1680	1730	1780	1830			
ER50-15	NL	1200	1290	1360	1440	1510	1580	1650	1710	1770					8	36.76	11.15
	ML	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890					
	HL	1200	1290	1360	1440	1510	1580	1650	1710	1770	1830	1890	1950	2010			
LR50-15	NL	1340	1430	1520	1600	1680	1750	1830	1900	1970					8	37.94	11.65
	ML	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100					
	HL	1340	1430	1520	1600	1680	1750	1830	1900	1970	2040	2100	2170	2230			

TABLE 1.0(X)

TYRE LOAD RATING TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR '50 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
175/50R13	NL	500	535	565	595	625	655	680	710	735					5½	26.67	7.13
	ML	500	535	565	595	625	655	680	710	735	760	785					
	HL	500	535	565	595	625	655	680	710	735	760	785	810	835			
195/50R15	NL	650	690	730	770	810	850	890	920	955					6	30.16	7.91
	ML	650	690	730	770	810	850	890	920	955	990	1020					
	HL	650	690	730	770	810	850	890	920	955	990	1020	1050	1080			
205/50R15	NL	720	770	810	860	900	940	980	1020	1060					6	30.82	8.19
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
225/50R15	NL	840	890	950	1000	1050	1100	1140	1190	1230					6½	32.37	8.98
	ML	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320					
	HL	840	890	950	1000	1050	1100	1140	1190	1230	1270	1320	1360	1400			
285/50R15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					8	36.84	11.26
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
195/50R16	NL	685	730	775	815	855	895	935	970	1005					6	31.16	7.91
	ML	685	730	775	815	855	895	935	970	1005	1040	1075					
	HL	685	730	775	815	855	895	935	970	1005	1040	1075	1110	1140			
225/50R16	NL	880	940	1000	1060	1110	1160	1210	1255	1300					6½	33.34	8.98
	ML	880	940	1000	1060	1110	1160	1210	1255	1300	1345	1390					
	HL	880	940	1000	1060	1110	1160	1210	1255	1300	1345	1390	1435	1475			
255/50R16	NL	1090	1160	1230	1300	1365	1425	1485	1545	1600					7½	35.71	10.24
	ML	1090	1160	1230	1300	1365	1425	1485	1545	1600	1655	1710					
	HL	1090	1160	1230	1300	1365	1425	1485	1545	1600	1655	1710	1760	1815			
265/50R16	NL	1160	1235	1310	1385	1450	1520	1580	1645	1709					8	36.55	10.71
	ML	1160	1235	1310	1385	1450	1520	1580	1645	1709	1765	1820					
	HL	1160	1235	1310	1385	1450	1520	1580	1645	1709	1765	1820	1875	1930			

TABLE 1.0(Y)
TYRE LOAD RATINGS, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS FOR BIAS PLY TYRES-ADDITIONAL SIZES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
165-380/6.5-15	NL	750	800	850	900	950	990	1030	1070	1110					4½	31.40	6.27
	ML	750	800	850	900	950	990	1030	1070	1110	1150	1190					

TABLE 1.0(Z)

TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR '55 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
165/55 R 12	NL	440	470	500	525	550	580	605	625	655					4½	25.25	6.49
	ML	440	470	500	525	550	580	605	625	655	675	695					
	HL	440	470	500	525	550	580	605	625	655	675	695	715	735			
185/55 R 13	NL	580	670	655	690	725	760	790	820	850					5½	28.01	7.44
	ML	580	670	655	690	725	760	790	820	850	880	910					
	HL	580	670	655	690	725	760	790	820	850	880	910	940	965			
225/55R13	NL	830	890	940	980	1030	1080	1120	1160	1200					6	30.98	8.78
	ML	830	890	940	980	1030	1080	1120	1160	1200	1240	1280					
	HL	830	890	940	980	1030	1080	1120	1160	1200	1240	1280	1320	1350			
195/55 R 14	NL	670	715	755	800	835	875	915	950	985					6	29.85	7.91
	ML	670	715	755	800	835	875	915	950	985	1015	1050					
	HL	670	715	755	800	835	875	915	950	985	1015	1050	1080	1115			
205/55R14	NL	720	770	810	860	900	940	980	1020	1060					6	30.59	8.19
	ML	720	770	810	860	900	940	980	1020	1060	1090	1130					
	HL	720	770	810	860	900	940	980	1020	1060	1090	1130	1160	1200			
225/55R14	NL	845	905	960	1015	1070	1120	1170	1220	1265					6½	32.19	8.98
	ML	845	905	960	1015	1070	1120	1170	1220	1265	1310	1355					
	HL	845	905	960	1015	1070	1120	1170	1220	1265	1310	1355	1400	1440			
195/55R15	NL	685	730	775	815	855	895	935	970	1005					6	30.85	7.91
	ML	685	730	775	815	855	895	935	970	1005	1040	1075					
	HL	685	730	775	815	855	895	935	970	1005	1040	1075	1110	1140			
205/55 R 15	NL	765	820	870	915	960	1005	1045	1090	1130					6	31.59	8.19
	ML	765	820	870	915	960	1005	1045	1090	1130	1165	1205					
	HL	765	820	870	915	960	1005	1045	1090	1130	1165	1205	1240	1280			
215/55 R 15	NL	815	870	920	970	1020	1065	1115	1155	1200					6½	32.45	8.70
	ML	815	870	920	970	1020	1065	1115	1155	1200	1240	1280					
	HL	815	870	920	970	1020	1065	1115	1155	1200	1240	1280	1320	1360			
225/55 R 15	NL	880	940	1000	1060	1110	1160	1210	1255	1300					6½	33.19	8.98
	ML	880	940	1000	1060	1110	1160	1210	1255	1300	1345	1390					
	HL	880	940	1000	1060	1110	1160	1210	1255	1300	1345	1390	1435	1475			
235/55R15	NL	970	1035	1100	1160	1215	1270	1325	1375	1430					7	34.02	9.45
	ML	970	1035	1100	1160	1215	1270	1325	1375	1430	1475	1525					
	HL	970	1035	1100	1160	1215	1270	1325	1375	1430	1475	1525	1570	1615			
275/55R15	NL	1260	1350	1430	1500	1580	1650	1720	1790	1860					8	37.19	10.98
	ML	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980					
	HL	1260	1350	1430	1500	1580	1650	1720	1790	1860	1920	1980	2040	2100			
205/55R16	NL	780	840	890	930	980	1030	1070	1110	1150					6	32.57	8.19
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL	780	840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
245/55 R 16	NL	1090	1160	1230	1300	1365	1425	1485	1545	1600					7½	35.93	9.92
	ML	1090	1160	1230	1300	1365	1425	1485	1545	1600	1655	1710					
	HL	1090	1160	1230	1300	1365	1425	1485	1545	1600	1655	1710	1760	1815			

* Amended March 1985

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
TABLE 1.0(AA)

ADR 23 A

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR '35 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
345/35R15	NL	960	1030	1090	1150	1210	1270	1320	1370	1420					11½	37.42	13.58
	ML	960	1030	1090	1150	1210	1270	1320	1370	1420	1470	1520					
	HL	960	1030	1090	1150	1210	1270	1320	1370	1420	1470	1520	1560	1610			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0(BB)

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR '40 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
205/40R13	NL	460	490	520	545	575	600	625	650	675					7	27.13	8.11
	ML	460	490	520	545	575	600	625	650	675	695	720					
	HL	460	490	520	545	575	600	625	650	675	695	720	740	765			
285/40R15	NL	890	950	1010	1070	1120	1170	1220	1270	1320					9½	34.59	11.22
	ML	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410					
	HL	890	950	1010	1070	1120	1170	1220	1270	1320	1360	1410	1450	1490			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
TABLE 1.0(CC)

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR '45 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum size factor (inches)	Section width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
235/45R15	NL	760	840	890	930	980	1030	1070	1110	1150					8	32.11	9.29
	ML	780	840	890	930	980	1030	1070	1110	1150	1190	1230					
	HL		840	890	930	980	1030	1070	1110	1150	1190	1230	1270	1300			
245/45 R 16	NL	940	1000	1060	1120	1180	1230	1290	1340	1390					8	33.68	9.57
	ML	940	1000	1060	1120	1180	1230	1290	1340	1390	1430	1475					
	HL	940	1000	1060	1120	1180	1230	1290	1340	1390	1430	1475	1520	1565			

* Amended March 1985

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (DD)

TYRE LOAD RATINGS TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR
MILIMETRIC '55 SERIES' RADIAL PLY TYRES (TR OR JM RIMS)

TYRE SIZE DESIGNATION	LOAD RANGE	MAXIMUM TYRE LOADS (POUNDS) AT VARIOUS COLD INFLATION PRESSURES (p.s.i.)												TEST RIM WIDTH (mm)	MINIMUM SIZE FACTOR (inches)	SECTION WIDTH (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
190/55R340	NL	650	695	735	775	810	850	885	920	950	985	1015			150	28.89	7.75
	ML	650	695	735	775	810	850	885	920	950	985	1015	1045	1075			
	HL	650	695	735	775	810	850	885	920	950	985	1015	1045	1075			
190/55R365	NL	670	720	760	800	840	880	915	950	985	1020	1050			150	29.87	7.75
	ML	670	720	760	800	840	880	915	950	985	1020	1050	1080	1110			
	HL	670	720	760	800	840	880	915	950	985	1020	1050	1080	1110			
190/55R390	NL	725	775	825	870	910	950	950	1030	1065					135	30.59	7.52
	ML	725	775	825	870	910	950	950	1030	1065	1100	1135					
	HL	725	775	825	870	910	950	950	1030	1065	1100	1135	1170	1205			
220/55R390	NL	915	975	1035	1090	1145	1200	1250	1295	1345					165	33.15	8.82
	ML	915	975	1035	1090	1145	1200	1250	1295	1345	1390	1435					
	HL	915	975	1035	1090	1145	1200	1250	1295	1345	1390	1435	1480	1520			
240/55R 390	NL	1055	1125	1195	1260	1320	1380	1440	1495	1550					180	34.80	9.64
	ML	1055	1125	1195	1260	1320	1380	1440	1495	1550	1600	1655					
	HL	1055	1125	1195	1260	1320	1380	1440	1495	1550	1600	1655	1705	1755			
240/55 R 415	NL	1095	1170	1240	1300	1370	1430	1490	1545	1600					180	35.78	9.64
	ML	1095	1170	1240	1300	1370	1430	1490	1545	1600	1655	1710					
	HL	1095	1170	1240	1300	1370	1430	1490	1545	1600	1655	1710	1760	1810			

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (EE)

TYRE LOAD RATINGS TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR
MILLIMETRIC '60 SERIES' RADIAL PLY TYRES (TR OR JM RIMS)

TYRE SIZE DESIGNATION	LOAD RANGE	MAXIMUM TYRE LOADS (POUNDS) AT VARIOUS COLD INFLATION PRESSURES (p.s.i.)												TEST RIM WIDTH (mm)	MINIMUM SIZE FACTOR (inches)	SECTION WIDTH (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
200/60R365	NL	790	845	895	945	990	1035	1080	1120	1160					135	31.22	7.75
	ML	790	845	895	945	990	1035	1080	1120	1160	1200	1235					
	HL	790	845	895	945	990	1035	1080	1120	1160	1200	1235	1270	1310			
200/60R390	NL	850	905	960	1010	1060	1105	1155	1200	1240					150	32/32	8.03
	ML	850	905	960	1010	1060	1105	1155	1200	1240	1285	1325					
	HL	850	905	960	1010	1060	1105	1155	1200	1240	1285	1325	1365	1405			

* Amended March 1985

Crown Copyright Reserved

July 1985

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTH

TABLE 1.0 (FF)

TYRE LOAD RATINGS TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

MILLIMETRIC '65 SERIES' RADIAL PLY TYRES (TD or TR RIMS)

Tyre Size Designation	Load Range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (mm)	Minimum size factor (inches)	Section Width (inches)	
		16	18	20	22	24	26	28	30	32	34	36	38				40
160/65R340	NL	565	600	635	670	705	735	765	795	825					120	27.60	6.45
	ML	565	600	635	670	705	735	765	795	825	855	880					
	HL	565	600	635	670	705	735	765	795	825	855	880	905 935				
170/65R340	NL	635	675	715	755	790	830	865	895	930				120	28.34	6.73	
	ML	635	675	715	755	790	830	865	895	930	960	990					
	HL	635	675	715	755	790	830	865	895	930	960	990	1020 1050				
180/65R340	NL	670	720	760	800	840	880	915	950	985				135	29.34	7.24	
	ML	670	720	760	800	840	880	915	950	985	1020	1050					
	HL	670	720	760	800	840	880	915	950	985	1020	1050	1080 1110				
200/65R340	NL	790	845	895	940	990	1035	1075	1120	1160				150	31.10	8.03	
	ML	790	845	895	940	990	1035	1075	1120	1160	1200	1235					
	HL	790	845	895	940	990	1035	1075	1120	1160	1200	1235	1270 1310				
160/65R365	NL	600	640	675	715	750	780	815	845	875				120	28.58	6.45	
	ML	600	640	675	715	750	780	815	845	875	905	935					
	HL	600	640	675	715	750	780	815	845	875	905	935	965 990				
170/65R365	NL	670	720	760	800	840	880	915	950	985				120	29.33	6.73	
	ML	670	720	760	800	840	880	915	950	985	1020	1050					
	HL	670	720	760	800	840	880	915	950	985	1020	1050	1080 1110				
210/65R365	NL	890	950	1005	1060	1110	1160	1210	1260	1300				165	33.08	8.54	
	ML	890	950	1005	1060	1110	1160	1210	1260	1300	1345	1390					
	HL	890	950	1005	1060	1110	1160	1210	1260	1300	1345	1390	1430 1470				
180/65R390	NL	725	775	820	865	905	945	985	1025	1065				135	31.33	7.24	
	ML	725	775	820	865	905	945	985	1025	1065	1100	1135					
	HL	725	775	820	865	905	945	985	1025	1065	1100	1135	1170 1205				
190/65R390	NL	815	870	925	975	1020	1070	1115	1155	1200				150	32.36	7.75	
	ML	815	870	925	975	1020	1070	1115	1155	1200	1240	1280					
	HL	815	870	925	975	1020	1070	1115	1155	1200	1240	1280	1320 1355				
220/65R390	NL	1030	1100	1165	1230	1290	1345	1400	1455	1510				150	34.69	8.58	
	ML	1030	1100	1165	1230	1290	1345	1400	1455	1510	1560	1610					
	HL	1030	1100	1165	1230	1290	1345	1400	1455	1510	1560	1610	1660 1705				

TABLE 1 - TYRE LOAD RATINGS, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.0 (GG)

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS FOR

'80 SERIES' RADIAL PLY TYRES

Tyre Size Designation	Load Range	Maximum tyre loads (pounds) at various cold inflation pressures (p.s.i.)												Test rim width (inches)	Minimum Size factor (inches)	Section Width (inches)
		16	18	20	22	24	26	28	30	32	34	36	38			
215/80R16	NL	1290	1380	1460	1540	1620	1690	1770	1830	1900				6	37.38	8.50
	ML	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030				
	HL	1290	1380	1460	1540	1620	1690	1770	1830	1900	1970	2030	2090 2150			

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 23A

TABLE 1.1(A)
TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS
FOR 'P' TYPE '50 SERIES' RADIAL PLY TYRES

Tyre Size Designation	Load Range	Maximum tyre loads (kilogrammes) at various cold inflation pressures (kPa)									Test rim Width (Inches)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
P215/50R13	SL	350	380	405	430	450	475	495			6	749	216
	EL	350	380	405	430	450	475	495	515	535			
P235/50R15	SL	405	440	470	500	525	550	575			6½	787	235
	EL	405	440	470	500	525	550	575	600	620			
P245/50R14	SL	460	495	530	565	595	625	650			7	835	248
	EL	460	495	530	565	595	625	650	675	705			
P265/50R14	SL	525	570	610	645	680	715	745			7	868	262
	EL	525	570	610	645	680	715	745	775	805			
P245/50R15	SL	480	520	555	590	620	655	680			7	860	248
	EL	480	520	555	590	620	655	680	710	735			
P265/50R15	SL	550	595	635	675	710	745	780			7	893	262
	EL	550	595	635	675	710	745	780	810	840			
P275/50R15	SL	585	635	680	720	760	795	830			8	921	279
	EL	585	635	680	720	760	795	830	865	895			
P285/50R15	SL	625	675	720	765	805	845	885			8	936	286
	EL	625	675	720	765	805	845	885	920	955			
P295/50R15	SL	660	715	765	810	855	895	935			8	953	294
	EL	660	715	765	810	855	895	935	975	1010			
P305/50R15	SL	700	760	810	860	905	950	995			8	970	301
	EL	700	760	810	860	905	950	995	1035	1070			

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.1(B)

Tyre Load Rating, Test Rims, Minimum Size Factors, and Section Widths

ADR 23 A

For "P" Type "60 Series" Radial Ply Tyres

Tyre Size Designation	Load Range	Maximum tyre loads (kilogrammes) at various cold inflation pressures (kPa)									Test rim Width (inches)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
P175/60R13	SL	290	310	335	355	375	390	410			5	705	177
	EL	290	310	335	355	375	390	410	425	440			
P185/60R13	SL	315	340	365	390	410	430	450			5	724	184
	EL	315	340	365	390	410	430	450	465	485			
P195/60R13	SL	345	375	400	425	445	470	490			5½	747	196
	EL	345	375	400	425	445	470	490	510	530			
P185/60R14	SL	335	360	385	410	430	455	475			5	750	184
	EL	335	360	385	410	430	455	475	490	510			
P195/60R14	SL	365	395	420	445	470	495	515			5½	773	196
	EL	365	395	420	445	470	495	515	540	560			
P205/60R14	SL	395	430	460	485	515	540	560			5½	792	203
	EL	395	430	460	485	515	540	560	585	605			
P215/60R14	SL	430	465	495	530	555	585	610			6	816	216
	EL	430	465	495	530	555	585	610	635	660			
P225/60R14	SL	465	505	535	570	600	630	660			6	834	223
	EL	465	505	535	570	600	630	660	685	710			
P235/60R14	SL	500	540	580	615	645	680	710			6½	857	235
	EL	500	540	580	615	645	680	710	740	765			
P245/60R14	SL	540	580	620	660	695	730	760			7	882	248
	EL	540	580	620	660	695	730	760	795	825			
P185/60R15	SL	350	380	405	430	455	475	495			5	775	184
	EL	350	380	405	430	455	475	495	515	535			
P195/60R15	SL	385	415	445	470	495	520	540			5½	798	196
	EL	385	415	445	470	495	520	540	565	585			
P205/60R15	SL	415	450	480	510	540	565	590			5½	817	203
	EL	415	450	480	510	540	565	590	615	635			
P215/60R15	SL	450	490	520	555	585	610	640			6	841	216
	EL	450	490	520	555	585	610	640	665	690			
P225/60R15	SL	490	525	565	595	630	660	690			6	859	223
	EL	490	525	565	595	630	660	690	720	745			
P235/60R15	SL	525	565	605	645	680	710	745			6½	882	235
	EL	525	565	605	645	680	710	745	775	800			
P245/60R15	SL	565	610	650	690	730	765	795			7	907	248
	EL	565	610	650	690	730	765	795	830	860			
P255/60R15	SL	605	650	695	740	780	820	855			7	925	255
	EL	605	650	695	740	780	820	855	890	925			
P265/60R15	SL	645	695	745	790	835	875	915			7	943	262
	EL	645	695	745	790	835	875	915	950	985			

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

ADR 234

TABLE 1.1(C)

TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS, AND SECTION WIDTHS
FOR 'P' TYPE '65 SERIES' RADIAL PLY TYRES

Tyre Size Designation	Load Range	Maximum Tyre Loads (Kilogrammes) at Various Cold Inflation pressure (kPa)									Test rim Width (inches)	Minimum Size Factor (mm)	Section Width (mm)																																																																																																																																																																																																																																																																																																																																																																				
		120	140	160	180	200	220	240	260	280																																																																																																																																																																																																																																																																																																																																																																							
P175/65R13	SL	310	335	360	380	400	420	440	455	475	5	723	177																																																																																																																																																																																																																																																																																																																																																																				
	EL	310	335	360	380	400	420	440	455	475				P185/65R13	SL	340	370	395	415	440	460	480	500	520	5	741	184	EL	340	370	395	415	440	460	480	500	520	P195/65R13	SL	375	400	430	455	480	505	525	550	570	5½	767	196	EL	375	400	430	455	480	505	525	550	570	P2 65R13	SL	405	435	465	495	520	545	570	595	615	5½	785	203	EL	405	435	465	495	520	545	570	595	615	P175/65R14	SL	330	355	380	400	425	445	465	480	500	5	749	177	EL	330	355	380	400	425	445	465	480	500	P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184	EL	360	390	415	440	465	485	510	530	550	P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675
P185/65R13	SL	340	370	395	415	440	460	480	500	520	5	741	184																																																																																																																																																																																																																																																																																																																																																																				
	EL	340	370	395	415	440	460	480	500	520				P195/65R13	SL	375	400	430	455	480	505	525	550	570	5½	767	196	EL	375	400	430	455	480	505	525	550	570	P2 65R13	SL	405	435	465	495	520	545	570	595	615	5½	785	203	EL	405	435	465	495	520	545	570	595	615	P175/65R14	SL	330	355	380	400	425	445	465	480	500	5	749	177	EL	330	355	380	400	425	445	465	480	500	P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184	EL	360	390	415	440	465	485	510	530	550	P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																				
P195/65R13	SL	375	400	430	455	480	505	525	550	570	5½	767	196																																																																																																																																																																																																																																																																																																																																																																				
	EL	375	400	430	455	480	505	525	550	570				P2 65R13	SL	405	435	465	495	520	545	570	595	615	5½	785	203	EL	405	435	465	495	520	545	570	595	615	P175/65R14	SL	330	355	380	400	425	445	465	480	500	5	749	177	EL	330	355	380	400	425	445	465	480	500	P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184	EL	360	390	415	440	465	485	510	530	550	P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																												
P2 65R13	SL	405	435	465	495	520	545	570	595	615	5½	785	203																																																																																																																																																																																																																																																																																																																																																																				
	EL	405	435	465	495	520	545	570	595	615				P175/65R14	SL	330	355	380	400	425	445	465	480	500	5	749	177	EL	330	355	380	400	425	445	465	480	500	P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184	EL	360	390	415	440	465	485	510	530	550	P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																				
P175/65R14	SL	330	355	380	400	425	445	465	480	500	5	749	177																																																																																																																																																																																																																																																																																																																																																																				
	EL	330	355	380	400	425	445	465	480	500				P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184	EL	360	390	415	440	465	485	510	530	550	P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																												
P185/65R14	SL	360	390	415	440	465	485	510	530	550	5	767	184																																																																																																																																																																																																																																																																																																																																																																				
	EL	360	390	415	440	465	485	510	530	550				P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196	EL	395	425	455	480	505	530	555	580	600	P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																				
P195/65R14	SL	395	425	455	480	505	530	555	580	600	5½	792	196																																																																																																																																																																																																																																																																																																																																																																				
	EL	395	425	455	480	505	530	555	580	600				P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203	EL	425	460	495	525	550	580	605	630	655	P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																												
P205/65R14	SL	425	460	495	525	550	580	605	630	655	5½	811	203																																																																																																																																																																																																																																																																																																																																																																				
	EL	425	460	495	525	550	580	605	630	655				P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216	EL	465	500	535	570	600	630	655	680	710	P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																				
P215/65R14	SL	465	500	535	570	600	630	655	680	710	6	837	216																																																																																																																																																																																																																																																																																																																																																																				
	EL	465	500	535	570	600	630	655	680	710				P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223	EL	500	540	580	615	645	680	710	740	765	P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																												
P225/65R14	SL	500	540	580	615	645	680	710	740	765	6	855	223																																																																																																																																																																																																																																																																																																																																																																				
	EL	500	540	580	615	645	680	710	740	765				P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177	EL	345	370	400	420	445	465	485	505	525	P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																				
P175/65R15	SL	345	370	400	420	445	465	485	505	525	5	774	177																																																																																																																																																																																																																																																																																																																																																																				
	EL	345	370	400	420	445	465	485	505	525				P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184	EL	380	410	435	460	485	510	535	555	575	P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																												
P185/65R15	SL	380	410	435	460	485	510	535	555	575	5	792	184																																																																																																																																																																																																																																																																																																																																																																				
	EL	380	410	435	460	485	510	535	555	575				P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196	EL	410	445	475	505	530	560	585	605	630	P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																																																				
P195/65R15	SL	410	445	475	505	530	560	585	605	630	5½	818	196																																																																																																																																																																																																																																																																																																																																																																				
	EL	410	445	475	505	530	560	585	605	630				P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203	EL	450	485	520	550	580	605	635	660	685	P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																																																																												
P205/65R15	SL	450	485	520	550	580	605	635	660	685	5½	836	203																																																																																																																																																																																																																																																																																																																																																																				
	EL	450	485	520	550	580	605	635	660	685				P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216	EL	485	525	560	595	625	660	685	715	740	P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																																																																																																				
P215/65R15	SL	485	525	560	595	625	660	685	715	740	6	862	216																																																																																																																																																																																																																																																																																																																																																																				
	EL	485	525	560	595	625	660	685	715	740				P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																																																																																																																												
P225/65R15	SL	525	565	605	645	675	710	740	770	800	6	881	223																																																																																																																																																																																																																																																																																																																																																																				
	EL	525	565	605	645	675	710	740	770	800																																																																																																																																																																																																																																																																																																																																																																							

TABLE 1.1 (1)
Tyre Load Rating, Test Rims, Minimum Size Factors, and Section Widths
For "P" Type "70 Series" Radial Ply Tyres

Tyre Size Designation	Load Range	Maximum tyre loads (kilogrammes) at various cold inflation pressures (kPa)									Test rim Width (inches)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
P175/70R12	SL	315	340	365	385	405	425	445			5	714	177
	EL	315	340	365	385	405	425	445	465	480			
P185/70R12	SL	345	375	400	425	445	470	490			5	735	184
	EL	345	375	400	425	445	470	490	510	530			
P195/70R12	SL	375	405	435	460	485	510	530			5½	761	196
	EL	375	405	435	460	485	510	530	550	570			
P165/70R13	SL	300	325	350	370	390	410	425			4½	715	165
	EL	300	325	350	370	390	410	425	445	460			
P175/70R13	SL	335	360	385	405	430	450	470			5	740	177
	EL	335	360	385	405	430	450	470	490	510			
P185/70R13	SL	365	395	420	450	470	495	515			5	761	184
	EL	365	395	420	450	470	495	515	540	560			
P195/70R13	SL	400	430	460	490	515	540	565			5½	786	196
	EL	400	430	460	490	515	540	565	590	610			
P205/70R13	SL	435	470	505	535	560	590	615			5½	806	203
	EL	435	470	505	535	560	590	615	640	665			
P175/70R14	SL	350	380	405	430	455	475	495			5	766	177
	EL	350	380	405	430	455	475	495	515	535			
P185/70R14	SL	385	415	445	470	495	520	545			5	787	184
	EL	385	415	445	470	495	520	545	565	590			
P195/70R14	SL	420	455	485	515	545	570	595			5½	812	196
	EL	420	455	485	515	545	570	595	620	645			
P205/70R14	SL	460	495	530	560	590	620	650			5½	832	203
	EL	460	495	530	560	590	620	650	675	700			
P215/70R14	SL	500	535	575	610	640	675	705			6	858	216
	EL	500	535	575	610	640	675	705	730	760			
P225/70R14	SL	540	580	620	660	695	730	760			6	879	223
	EL	540	580	620	660	695	730	760	790	820			
P235/70R14	SL	580	625	670	710	750	785	820			6½	904	235
	EL	580	625	670	710	750	785	820	855	885			
P245/70R14	SL	625	675	720	765	805	845	880			7	930	248
	EL	625	675	720	765	805	845	880	920	955			
P175/70R15	SL	370	400	425	450	475	500	520			5	791	177
	EL	370	400	425	450	475	500	520	545	565			
P105/70R15	SL	405	435	465	495	520	550	570			5	812	184
	EL	405	435	465	495	520	550	570	595	620			
P195/70R15	SL	440	475	510	540	570	600	625			5½	837	196
	EL	440	475	510	540	570	600	625	650	675			
P205/70R15	SL	480	520	555	590	620	650	680			5½	857	203
	EL	480	520	555	590	620	650	680	705	735			

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
 TABLE 1.1(E)
 Tyre Load Rating, Test Rims, Minimum Size Factors, and Section Widths
 For "P" Type "75 Series" Radial Ply Tyres

ADR 23 A

Tyre Size Designation	Load Range	Maximum tyre loads (kilogrammes) at various cold inflation pressures (kPa)									Test rim Width (inches)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
P165/75 R13	SL	320	350	370	395	415	435	455			4½	731	165
	EL	320	350	370	395	415	435	455	475	490			
P175/75 R13	SL	355	385	410	435	460	480	505			5	756	177
	EL	355	385	410	435	460	480	505	525	545			
P185/75 R13	SL	390	420	450	480	505	530	555			5	778	184
	EL	390	420	450	480	505	530	555	575	595			
P175/75 R14	SL	375	405	435	460	485	510	530			5	782	177
	EL	375	405	435	460	485	510	530	550	573			
P185/75 R14	SL	410	445	475	505	530	560	585			5	804	184
	EL	410	445	475	505	530	560	585	605	630			
P195/75 R14	SL	450	485	520	550	580	610	635			5½	829	196
	EL	450	485	520	550	580	610	635	665	690			
P205/75 R14	SL	490	530	565	600	635	665	695			5½	852	203
	EL	490	530	565	600	635	665	695	720	750			
P215/75 R14	SL	535	575	615	650	690	720	755			6	878	216
	EL	535	575	615	650	690	720	755	785	815			
P175/75 R15	SL	395	425	455	480	510	535	555			5	807	177
	EL	395	425	455	480	510	535	555	580	600			
P185/75 R15	SL	430	465	500	530	560	585	610			5	829	184
	EL	430	465	500	530	560	585	610	635	660			
P195/75 R15	SL	470	510	545	580	610	640	670			5½	854	196
	EL	470	510	545	580	610	640	670	695	720			
P205/75 R15	SL	515	555	595	630	665	695	725			5½	877	203
	EL	515	555	595	630	665	695	725	755	785			
P215/75 R15	SL	555	600	645	685	720	755	790			6	903	216
	EL	555	600	645	685	720	755	790	820	850			
P225/75 R15	SL	605	650	695	740	780	815	850			6	925	223
	EL	605	650	695	740	780	815	850	885	920			
P235/75 R15	SL	650	700	750	795	840	880	920			6½	950	235
	EL	650	700	750	795	840	880	920	955	990			
P245/75 R15	SL	700	755	810	860	905	950	990			7	979	248
	EL	700	755	801	860	905	950	990	1030	1070			

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.1(F)
Tyre Load Rating, Test Rims, Minimum Size Factors, and Section Widths
For "P" Type "80 Series" Radial Ply Tyres

ADR 23A

Tyre Size Designation	Load Range	Maximum tyre loads (kilogrammes) at various cold inflation pressures (kPa)									Test rim Width (inches)	Minimum Size Factor (mm)	Section Width (mm)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
		120	140	160	180	200	220	240	260	280																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
P155/80R12	SL	290	315	340	360	380	395	415			4½	698	157																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	290	315	340	360	380	395	415	430	445				P165/80R12	SL	325	350	375	400	420	440	460			4½	721	165	EL	325	350	375	400	420	440	460	480	495	P155/80R13	SL	310	335	355	380	400	420	435			4½	723	157	EL	310	335	355	380	400	420	435	455	470	P165/80R13	SL	345	370	395	420	445	465	485			4½	746	165	EL	345	370	395	420	445	465	485	505	525	P175/80R13	SL	380	410	440	465	490	515	535			5	773	177	EL	380	410	440	465	490	515	535	560	580	P185/80R13	SL	415	450	480	510	540	565	595			5	796	184	EL	415	450	480	510	540	565	595	615	640	P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595
P165/80R12	SL	325	350	375	400	420	440	460			4½	721	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	325	350	375	400	420	440	460	480	495				P155/80R13	SL	310	335	355	380	400	420	435			4½	723	157	EL	310	335	355	380	400	420	435	455	470	P165/80R13	SL	345	370	395	420	445	465	485			4½	746	165	EL	345	370	395	420	445	465	485	505	525	P175/80R13	SL	380	410	440	465	490	515	535			5	773	177	EL	380	410	440	465	490	515	535	560	580	P185/80R13	SL	415	450	480	510	540	565	595			5	796	184	EL	415	450	480	510	540	565	595	615	640	P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																				
P155/80R13	SL	310	335	355	380	400	420	435			4½	723	157																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	310	335	355	380	400	420	435	455	470				P165/80R13	SL	345	370	395	420	445	465	485			4½	746	165	EL	345	370	395	420	445	465	485	505	525	P175/80R13	SL	380	410	440	465	490	515	535			5	773	177	EL	380	410	440	465	490	515	535	560	580	P185/80R13	SL	415	450	480	510	540	565	595			5	796	184	EL	415	450	480	510	540	565	595	615	640	P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																												
P165/80R13	SL	345	370	395	420	445	465	485			4½	746	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	345	370	395	420	445	465	485	505	525				P175/80R13	SL	380	410	440	465	490	515	535			5	773	177	EL	380	410	440	465	490	515	535	560	580	P185/80R13	SL	415	450	480	510	540	565	595			5	796	184	EL	415	450	480	510	540	565	595	615	640	P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																				
P175/80R13	SL	380	410	440	465	490	515	535			5	773	177																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	380	410	440	465	490	515	535	560	580				P185/80R13	SL	415	450	480	510	540	565	595			5	796	184	EL	415	450	480	510	540	565	595	615	640	P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																												
P185/80R13	SL	415	450	480	510	540	565	595			5	796	184																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	415	450	480	510	540	565	595	615	640				P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133	EL	260	280	300	320	335	350	365	380	395	P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																				
P135/80R14	SL	260	280	300	320	335	350	365			3½	695	133																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	260	280	300	320	335	350	365	380	395				P145/80R14	SL	290	315	335	360	375	395	415			4	722	145	EL	290	315	335	360	375	395	415	430	445	P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																												
P145/80R14	SL	290	315	335	360	375	395	415			4	722	145																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	290	315	335	360	375	395	415	430	445				P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157	EL	325	355	375	400	420	440	460	480	500	P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																				
P155/80R14	SL	325	355	375	400	420	440	460			4½	749	157																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	325	355	375	400	420	440	460	480	500				P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165	EL	360	390	420	445	470	490	510	535	555	P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																												
P165/80R14	SL	360	390	420	445	470	490	510			4½	772	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	360	390	420	445	470	490	510	535	555				P175/80R14	SL	400	430	460	490	515	540	565			5	799	177	EL	400	430	460	490	515	540	565	590	610	P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																				
P175/80R14	SL	400	430	460	490	515	540	565			5	799	177																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	400	430	460	490	515	540	565	590	610				P185/80R14	SL	440	475	510	540	565	595	620			5	822	184	EL	440	475	510	540	565	595	620	645	670	P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																												
P185/80R14	SL	440	475	510	540	565	595	620			5	822	184																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	440	475	510	540	565	595	620	645	670				P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196	EL	480	520	555	590	620	650	680	710	735	P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																				
P195/80R14	SL	480	520	555	590	620	650	680			5½	849	196																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	480	520	555	590	620	650	680	710	735				P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203	EL	525	565	605	640	675	710	740	770	800	P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																												
P205/80R14	SL	525	565	605	640	675	710	740			5½	871	203																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	525	565	605	640	675	710	740	770	800				P215/80R14	SL	570	615	655	695	735	770	805			6	899	216	EL	570	615	655	695	735	770	805	835	870	P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																				
P215/80R14	SL	570	615	655	695	735	770	805			6	899	216																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	570	615	655	695	735	770	805	835	870				P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133	EL	275	295	315	335	355	370	385	405	420	P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																												
P135/80R15	SL	275	295	315	335	355	370	385			3½	720	133																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	275	295	315	335	355	370	385	405	420				P145/80R15	SL	305	330	355	375	395	415	435			4	747	145	EL	305	330	355	375	395	415	435	450	470	P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																				
P145/80R15	SL	305	330	355	375	395	415	435			4	747	145																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	305	330	355	375	395	415	435	450	470				P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157	EL	345	370	395	420	445	465	485	505	525	P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																																												
P155/80R15	SL	345	370	395	420	445	465	485			4½	774	157																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	345	370	395	420	445	465	485	505	525				P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165	EL	380	410	440	465	490	515	540	560	580	P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																																																																				
P165/80R15	SL	380	410	440	465	490	515	540			4½	797	165																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	380	410	440	465	490	515	540	560	580				P175/80R15	SL	420	455	485	515	540	570	595			5	824	177	EL	420	455	485	515	540	570	595	620	640	P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																																																																																												
P175/80R15	SL	420	455	485	515	540	570	595			5	824	177																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	420	455	485	515	540	570	595	620	640				P185/80R15	SL	460	500	530	565	595	625	650			5	847	184	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
P185/80R15	SL	460	500	530	565	595	625	650			5	847	184																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
	EL	460	500	530	565	595	625	650	680	705																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															

TABLE 1.1 - TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS
TABLE 1.1(G)

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR MILLIMETRIC '60 SERIES' RADIAL PLY TYRES

Tyre size designation	Load range	Maximum tyre loads (kg) at various cold inflation pressures (kPa)									Test Rim Width (ins)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
175/60R13	SL	245	270	295	325	350	375	400			5	705	177
195/60R13	SL	300	330	360	395	425	455	487			5.5	747	196
205/60R13	SL	315	350	380	415	450	480	515			5.5	766	203
215/60R13	SL	345	380	415	450	490	525	560			6	790	216
225/60R13	SL	355	395	430	470	505	545	580			6	808	223
235/60R13	SL	385	425	465	510	550	590	630			6.5	831	235
185/60R14	SL	290	320	350	385	415	445	475			5	750	184
195/60R14	SL	315	350	380	415	450	480	515			5.5	773	196
215/60R14	SL	355	395	430	470	505	545	580			6	816	216
225/60R14	SL	375	415	455	495	535	575	615			6	834	223
235/60R14	SL	410	455	495	540	585	625	670			6.5	857	235
195/60R15	SL	325	360	395	425	460	495	530			5.5	798	196
205/60R15	SL	355	395	430	470	505	545	580			5.5	817	203
225/60R15	SL	385	425	465	510	550	590	630			6	859	223

TABLE 1.1 - LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.1(H)

TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR MILLIMETRIC '65 SERIES' RADIAL PLY TYRES

Tyre Size Designation	Load Range	Maximum tyre loads (kg) at various cold inflation pressures (kPa)									Test Rim Width (ins)	Minimum Size Factor (mm)	Section Width (mm)
		120	140	160	180	200	220	240	260	280			
175/65R12	SL	260	290	315	340	370	395	425			5	697	177
155/65R13	SL	225	245	270	295	320	340	365			4.5	678	157
165/65R13	SL	245	270	295	320	350	375	400			4.5	698	165
175/65R13	SL	275	305	335	360	390	420	450			5	723	177
185/65R13	SL	305	340	370	405	435	470	500			5	741	184
195/65R13	SL	315	355	395	435	470	510	545			5.5	767	196
155/65R14	SL	230	255	280	300	325	350	375			4.5	703	157
165/65R14	SL	260	290	315	340	370	395	425			4.5	723	165
175/65R14	SL	290	320	350	385	415	445	475			5	749	177
185/65R14	SL	315	350	380	415	450	480	515			5	767	184
195/65R14	SL	345	380	415	450	490	525	560			5.5	793	196
205/65R14	SL	370	405	445	485	525	560	600			5.5	811	203
185/65R15	SL	335	370	405	440	475	510	545			5	792	184
195/65R15	SL	355	395	430	470	505	545	580			5.5	818	196
205/65R15	SL	390	430	470	510	550	590	630			5.5	836	203

TABLE 1.1 - LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS

TABLE 1.1 (J)

TYRE LOAD RATING, TEST RIMS, MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR MILLIMETRIC '70' SERIES RADIAL PLY TYRES

TYRE SIZE DESIGNATION	LOAD RANGE	MAXIMUM TYRE LOADS (KG) AT VARIOUS COLD INFLATION PRESSURES (kPa)								TYRE RIM WIDTH (ins)	MINIMUM SIZE FACTOR (mm)	SECTION WIDTH (mm)	
		120	140	160	180	200	220	240	260				280
145/70 R 10	SL	155	175	195	215	235	255	272			4	595	144
155/70 R 10	SL	175	200	220	245	265	285	307			4	613	151
145/70 R 14	SL	210	235	265	290	315	340	365			4	696	144
145/70 R 15	SL	220	250	280	305	335	360	387			4	723	144
165/70 R 15	SL	275	310	345	375	410	445	475			4.5	770	165

TABLE 1.1 (K)

TYRE LOAD RATING TEST RIMS MINIMUM SIZE FACTORS AND SECTION WIDTHS
FOR MILLIMETRIC '80 SERIES' RADIAL PLY TYRES

TYRE SIZE DESIGNATION	LOAD RANGE	MAXIMUM TYRE LOADS (KILOGRAMS) AT VARIOUS COLD INFLATION PRESSURES (kPa)								TEST RIM WIDTH (ins)	MAXIMUM SIZE FACTOR (mm)	SECTION WIDTH (mm)	
		120	140	160	180	200	220	240	260				280
175/80 R 16	SL	445	480	515	545	570	600	630			5	849	177

* Amended March 1985

TABLE 2 - APPROVED RIMS

TABLE 2.0 Part A
APPROVED RIMS FOR TYRES

Tyre Size Designation	Approved Rims	Tyre Size Designation	Approved Rims
4.40-10	3.00B; 3.00D; 3.50B; 3.50D; 3½JJ	8.50-14	6JJ; 5½JJ; 5½K; 6K; 6L; 6½JJ; 6½K; 7JJ;
4.80-10	3.00B; 3.00D; 3.50B; 4JJ	9.00-14	6½K; 5½JJ; 6JJ; 6K; 6½JJ; 7JJ; 7L;
5.20-10	3½JJ; 3.50B; 3.50D; 4JJ; 4½JJ	9.50-14	6½K; 6JJ; 6K; 6½JJ; 7JJ; 7L; 7½L
5.90-10	4JJ; 4½JJ; 5JJ	6.00-15	4JJ; 4½JJ; 4½K; 5JJ;
4.80-12	3½JJ; 3.00B; 3.00D; 3.50B; 4JJ	6.50-15	4½K; 4½JJ; 5JJ; 5½JJ; 5K
5.20-12	3½JJ; 3.50D; 4JJ; 4½JJ	7.00-15	5.00F; 5K; 5½K; 5.00B; 5.50F
5.60-12	4.00C; 4JJ; 4.00B; 4½JJ; 4.00; 4.50C; 5JJ	8.00-15	6L; 5½JJ; 5½K; 6JJ; 6½JJ; 6½K; 6½L; 7JJ
5.90-12	4JJ; 4½JJ; 5JJ	9.00-15	6JJ; 5½JJ; 6½JJ; 7JJ; 6½K
5.20-13	3½JJ; 3.50D; 4JJ; 4½JJ	8.15-15	5½JJ; 6JJ; 6½JJ; 7JJ; 5½K; 6K; 6L
5.60-13	4JJ; 4½JJ; 5JJ	8.20-15	5½JJ; 5½K; 6½JJ; 6½K; 6½L; 7JJ
5.90-13	4JJ; 4½JJ; 5JJ	8.45-15	5½JJ; 5½K; 6½JJ; 6½K; 7JJ;
6.20-13	4JJ; 4½JJ; 5JJ	8.55-15	6½JJ;
6.40-14	4½JJ; 5JJ; 5½JJ	8.90-15	7JJ; 8JJ
6.90-13	5JJ; 5½JJ; 6JJ	7.50-16	5.50F
4.60-14	4½JJ; 5JJ; 4½K; 4.50B; 5K; 5½JJ; 5.00E	7.60-16	5½JJ; 6JJ
5.20-15	3.50D; 3½JJ; 4JJ; 4.00B; 4½JJ; 4½K	6.50-17	5.00F
5.60-15	5K	6.00-16	4.00B; 4.50E
6.70-15	4½JJ; 4½K; 5JJ; 5K; 4.50B; 5½JJ; 6JJ;	6.50-16	4.50B; 5.00E
	5.00F; 5½K; 6L	7.00-16	5.50F; 5.00F; 5.00E
7.10-15	4½JJ; 5K; 5½K; 6JJ; 4½K; 6L; 5.00F; 5.50F;	165-380	4JJ; 4½JJ; 5JJ
7.60-15	5JJ; 5½K; 5½JJ; 6L; 6½JJ; 5K; 5.50F; 6K	(6.5-15)	
8.20-15	6JJ; 6L;	5.95-10	3½JJ; 4JJ; 4½JJ; 5JJ; 3.50B
8.45-15	6JJ; 6K; 6L	6.20-12	4JJ; 4½JJ; 5JJ
8.90-15	6JJ; 6½JJ; 6½L; 7L	6.15-13	4JJ; 4½JJ; 5JJ
6.70-16	4½K; 5K; 5½JJ; 6JJ	6.45-13	4½JJ; 5JJ; 5½JJ
5.00-12	3.50B; 3½JJ; 3.50; 4JJ; 4.00; 4.00B; 4.00C	6.95-13	4½JJ; 5JJ; 5½JJ; 6JJ
5.50-12	3½JJ; 4JJ; 4½JJ	6.15-14	4JJ; 4½JJ; 5JJ
6.00-12	4JJ; 4½JJ; 5JJ	6.45-14	4½JJ; 4½K; 5JJ; 5K; 5½JJ
5.00-13	3.50D; 3½JJ; 4½JJ; 4½K	6.95-14	4½JJ; 5JJ; 5K; 5½JJ; 6JJ
5.50-13	4JJ	7.35-14	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6½JJ
6.00-13	4JJ; 4½JJ; 5JJ; 4.00C; 4.50C; 4½K	7.75-14	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6K; 6½JJ
6.50-13	4½JJ; 5JJ; 5½JJ; 4½K; 5K; 5½K	8.25-14	5½JJ; 5½K; 6JJ; 6K; 6½JJ; 7JJ; 6½K
7.00-13	5K; 6K; 4½K; 5½K; 4½JJ; 5JJ; 5½JJ; 6JJ	8.55-14	5½JJ; 6JJ; 6K; 6½JJ; 6½K; 7JJ
7.25-13	5JJ; 5½JJ; 6JJ	8.85-14	6JJ; 6K; 6½JJ; 7JJ
7.50-13	5½JJ; 5½K; 5JJ; 5K; 6JJ; 6K	6.35-15	4JJ; 4½JJ; 5JJ
5.50-15L	4JJ; 3½JJ; 4½JJ; 4½K	6.85-15	4½JJ; 4½K; 5JJ; 5K; 5½JJ; 6JJ; 5½K
6.00-15L	4½JJ; 4½K; 4JJ; 5JJ	7.35-15	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6½JJ
6.50-15L	4½JJ; 4½K; 5JJ; 5½JJ	7.75-15	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6½JJ
6.50-15L	4½JJ; 4½K;	8.25-15	5½JJ; 5½K; 6JJ; 6K; 6L; 6½JJ; 7JJ
7.00-15L	5JJ; 5K; 4½JJ; 4½K; 5½JJ; 5½K; 5.50F; 6JJ	8.55-15	5½JJ; 5½K; 6JJ; 6K; 6L; 6½K; 7JJ
5.0-15	3½JJ; 3.50B; 3.50D; 4JJ; 4.00C	8.85-15	6JJ; 6K; 6L; 6½JJ; 7JJ
5.5-15	4JJ; 4½JJ; 5JJ	9.15-15	6JJ; 6K; 6L; 6½JJ; 7JJ
6.00-14	4JJ; 4½JJ; 5JJ; 4.00C; 4.50C	145 R 10	3½JJ; 4JJ; 4½JJ; 5JJ; 3.50; 3.50B; 4.00;
6.50-14	5½K; 4½JJ; 4½K; 5JJ; 5K; 5½JJ		4.00B; 4.00C; 4.50C; 3.50D; 5.00C
7.00-14	4½JJ; 5JJ; 5K; 5½JJ; 5½K; 6JJ	125 R 12	3½JJ; 3.50B; 3.50D; 3.50; 4JJ; 4.00;
7.50-14	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6K; 6½JJ		4.00B; 4.00C
8.00-14	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6K; 6½JJ; 6½K	135 R 12	4JJ; 3½JJ; 3.50; 3.50B; 3.50D; 4.00;
			4.00B; 4.00C; 4½JJ; 4.50; 4.50B; 4.50C

NOTE: It is permissible to use existing J or JK rims where 'JJ' rims are specified in the above table.

** From Table 1.

TABLE 2.0 PART A (CONTINUED)
APPROVED RIMS FOR TYRES

AGR 23A

Tyre Size Designation	Approved Rims
145 R 12	4JJ; 4½JJ; 5JJ; 4.00; 4.00B; 4.00C; 4.50; 4.50B; 4.50C
155 R 12	4JJ; 4½JJ; 5JJ; 4.00; 4.00B; 4.00C; 4.50; 4.50B; 4.50C; 5.00C
135 R 13	4JJ; 3½JJ; 3.50; 3.50B; 3.50D; 4.00; 4.00B; 4.00C; 4½JJ; 4.50; 4.50B; 4.50C;
145 R 13	4JJ; 4½JJ; 4.50B; 5JJ; 4.00; 4.00B; 4.00C; 4.50; 4.50C; 5.00; 5.00B
155 R 13	4.50B; 4JJ; 4½JJ; 5JJ; 4.00C; 4.50; 4.50C; 5.00; 5.00B
165 R 13	4.50B; 4½JJ; 5JJ; 5½JJ; 4.50; 4.50B; 5.00; 5.00B; 5K; 5.50; 5.50B; 5½K
175 R 13	4½JJ; 5JJ; 5½JJ; 6JJ; 5K; 5½K; 6K; 5.50B
185 R 13	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 5½K; 6K; 6½K
195 R 13	5JJ; 5½JJ; 6JJ; 6½JJ;
135 R 14	4JJ; 4.00C; 3½JJ; 3.50; 3.50B; 3.50D; 4.00; 4.00B; 4½JJ
145 R 14	4JJ; 4.00; 4.00B; 4.00C; 4½JJ; 5JJ
155 R 14	4JJ; 4½JJ; 5JJ; 4.00C; 4.50C;
165 R 14	4½JJ; 5JJ; 5K; 5½JJ; 5½K; 4½K; 4JJ
175 R 14	4½JJ; 5JJ; 5K; 5½JJ; 6JJ; 5½K; 6K; 4½K
185 R 14	5JJ; 5K; 5½JJ; 5½K; 6JJ; 6K; 6½JJ; 6L; 6½K
195 R 14	5JJ; 5½JJ; 5½K; 6JJ; 6K; 6½JJ; 5K; 6½K
205 R 14	5½JJ; 5½K; 6JJ; 6K; 6½K; 6½JJ; 7JJ; 6½L; 7K; 7L
215 R 14	5½JJ; 5½K; 6JJ; 6K; 6½K; 6½JJ; 7JJ; 6L; 6½L; 7K; 7L; 7½K; 7½L
225 R 14	6JJ; 6K; 6½JJ; 6½K; 7L; 7JJ; 6½L; 7K; 7½K
125 R 15	3½JJ; 3.50B; 3.50D; 3.50; 4.00; 4.00B; 4.00C; 4JJ
135 R 15	3½JJ; 4JJ; 4½JJ; 3.50; 3.50B; 3.50D; 4.00C
145 R 15	4JJ; 4½JJ; 5JJ;
155 R 15	4JJ; 4½JJ; 5JJ; 5.00C; 4.50C
165 R 15	4½JJ; 5JJ; 5K; 5½JJ; 4½K; 5½K
175 R 15	4½JJ; 5JJ; 5K; 5½JJ; 5½K; 6JJ; 4½K; 6K
185 R 15	5JJ; 5½JJ; 5½K; 6JJ; 6L; 6½JJ; 5K; 6K; 6½K
195 R 15	5JJ; 5½JJ; 5½K; 6JJ; 6L; 6½JJ; 5K; 6K; 6½K
205 R 15	5½JJ; 5½K; 6JJ; 6½JJ; 6½L; 7JJ; 7L; 6K; 6L; 6½K; 7K
215 R 15	5½JJ; 5½K; 6JJ; 6L; 6½JJ; 6½L; 7JJ; 7L; 6K; 6½K; 7K
225 R 15	6JJ; 6L; 6½JJ; 6½L; 7JJ; 7L; 6½K; 7K; 7½K; 7½L
235 R 15	6JJ; 6L; 6½JJ; 6½L; 7JJ; 7L;
205 R 16	5½JJ; 5½K; 6JJ; 6½JJ; 6½L; 7JJ; 7L; 6K; 6L; 6½K; 7K
6.70-13	4½JJ; 5JJ; 5½JJ; 6JJ;
5.20-14	3½JJ; 3.50D; 4JJ; 4½JJ
5.60-14	4JJ; 4½JJ; 5JJ
5.90-14	4JJ; 4½JJ; 5JJ
5.60-15	4JJ; 4½JJ; 5JJ
5.90-15	4JJ; 4½JJ; 5JJ
6.40-15	4½JJ; 4½K; 5JJ; 5K; 5½JJ
BR50-13	6½JJ
GR50-14	8JJ
GB50-15	7JJ
HR50-15	8JJ
LR50-15	8JJ
AR60-13	5½JJ; 6JJ; 6½JJ; 7JJ
BR60-13	5½JJ; 6JJ; 6½JJ; 7JJ;
CF 60-13	6JJ; 6½JJ; 7JJ; 8JJ;
DR60-13	6JJ; 6½JJ; 7JJ; 8JJ;
ER60-13	6½JJ; 7JJ; 8JJ;
AR60-14	5½JJ; 6JJ; 6½JJ; 7JJ

Tyre Size Designation	Approved Rims
HR60-14	5½JJ; 6JJ; 6½JJ; 7JJ;
CR60-14	6JJ; 6½JJ; 7JJ;
DR60-14	6JJ; 6½JJ; 7JJ; 8JJ;
ER60-14	6JJ; 6½JJ; 7JJ; 8JJ
FR60-14	6½JJ; 7JJ; 8JJ;
GR60-14	6½JJ; 7JJ; 8JJ; 9JJ
HR60-14	7JJ; 8JJ; 9JJ;
JR60-14	7JJ; 8JJ; 9JJ;
LR60-14	8JJ; 9JJ; 10JJ;
AR60-15	5JJ; 5½JJ; 6JJ
BR60-15	5½JJ; 6JJ; 6½JJ; 7JJ
CR60-15	5½JJ; 6JJ; 6½JJ; 7JJ
DR60-15	6JJ; 6½JJ; 7JJ;
ER60-15	6JJ; 6½JJ; 7JJ; 8JJ
FR60-15	6½JJ; 7JJ; 8JJ;
GR60-15	6½JJ; 7JJ; 8JJ;
HR60-15	7JJ; 8JJ; 9JJ;
JR60-15	7JJ; 8JJ; 9JJ;
LR60-15	7JJ; 8JJ; 9JJ;
A70-13	5JJ; 5½JJ; 6JJ; 4½JJ
B70-13	5JJ; 5½JJ; 6JJ; 6½JJ;
C70-13	5½JJ; 6JJ; 6½JJ; 5JJ
D70-13	5½K; 5½JJ; 6JJ; 6½JJ; 7JJ; 5JJ
A70-14	4½JJ; 5JJ; 5½JJ; 6JJ;
B70-14	5JJ; 5½JJ; 6JJ; 4½JJ
C70-14	5JJ; 5½JJ; 6JJ; 6½JJ;
D70-14	5½JJ; 6JJ; 6½JJ;
E70-14	5½JJ; 6JJ; 6½JJ; 7JJ
F70-14	6JJ; 6½JJ; 7JJ; 5½JJ
G70-14	6JJ; 6½JJ; 7JJ;
H70-14	6½JJ; 7JJ; 8JJ; 6JJ
J70-14	6½JJ; 7JJ; 8JJ;
L70-14	6½JJ; 7JJ; 8JJ
C70-15	5JJ; 5½JJ; 6JJ; 6½JJ
D70-15	5JJ; 5½JJ; 6JJ; 6½JJ
E70-15	5½JJ; 6JJ; 6½JJ; 7JJ
F70-15	5½JJ; 6JJ; 6½JJ; 7JJ
G70-15	6JJ; 6½JJ; 7JJ; 7½K
H70-15	6JJ; 6½JJ; 7JJ; 8JJ; 7½K; 7½JJ
J70-15	6½JJ; 7JJ; 8JJ;
K70-15	6½JJ; 7JJ; 8JJ;
L70-15	6½JJ; 7JJ; 8JJ;
ZR70-12	5JJ; 5½JJ; 6JJ;
AR70-12	5JJ; 5½JJ; 6JJ;
ZR70-13	4.50B; 4½JJ; 5JJ; 5½JJ; 6JJ;
AR70-13	5JJ; 5½JJ; 6JJ; 4½JJ;
BR70-13	5JJ; 5½JJ; 6JJ; 6½JJ;
CR70-13	5½JJ; 6JJ; 6½JJ;
DR70-13	5½JJ; 6JJ; 6½JJ; 7JJ; 5JJ
AR70-14	5JJ; 5½JJ; 6JJ;
HR70-14	5JJ; 5½JJ; 6JJ;
CR70-14	5JJ; 5½JJ; 6JJ; 6½JJ;
DR70-14	5½JJ; 6JJ; 6½JJ; 6½K;
ER70-14	5½JJ; 6JJ; 6½JJ; 7JJ;
FR70-14	6JJ; 6½JJ; 7JJ; 7½JJ

NOTE: It is permissible to use existing J or JJ rims where 'JJ' rims are specified in the above table.
** Table 1

TABLE 2.0 - PART A (CONTINUED)
APPROVED RIMS FOR TYRES

Tyre ** Size Designation	Approved Rims
GR70-14	6JJ; 6½JJ; 7JJ; 6L; 7L
HR70-14	6½JJ; 7JJ; 8JJ; 6L; 7L
JR70-14	6½JJ; 7JJ; 7L; 8JJ
LR70-14	6½JJ; 7JJ; 7L; 8JJ
CR70-15	5JJ; 5½JJ; 6JJ; 6½JJ
DR70-15	5½JJ; 6JJ; 6½JJ
ER70-15	5½JJ; 6JJ; 6½JJ; 7JJ; 6L
FR70-15	6K; 5½JJ; 6JJ; 6½JJ; 7JJ; 6L
GR70-15	6K; 6JJ; 6½JJ; 7JJ; 6L; 7L; 7½K
HR70-15	6L; 6K; 6JJ; 6½JJ; 7JJ; 8JJ; 7L
JR70-15	6JJ; 6½JJ; 7JJ; 8JJ; 7L
KR70-15	6½JJ; 7JJ; 8JJ; 7L
LR70-15	6JJ; 6½JJ; 7JJ; 8JJ
MR70-15	7JJ; 8JJ; 9JJ
YR70-13	4½JJ; 5JJ; 5½JJ
Y78-12	4½JJ; 5JJ; 5½JJ; 4JJ
Z78-12	4½JJ; 5JJ; 5½JJ; 4JJ
Y78-13	4JJ; 4½JJ; 5JJ
Z78-13	4½JJ; 5JJ; 5½JJ; 4JJ
A78-13	4½JJ; 5JJ; 5½JJ
B78-13	4½JJ; 5JJ; 5½JJ; 6JJ
C78-13	5JJ; 5½JJ; 6JJ
D78-13	5½JJ; 5JJ; 6JJ; 6½JJ
B78-14	4½JJ; 5JJ; 5½JJ; 5K; 4½K
C78-14	5JJ; 5½JJ; 6JJ; 5K; 4½JJ
D78-14	5JJ; 5½JJ; 6JJ; 6½JJ; 5K
E78-14	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 5½K
F78-14	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 5½K; 6K; 7JJ
G78-14	5½JJ; 6JJ; 6½JJ; 7JJ; 5½K; 6K
H78-14	6JJ; 6½JJ; 7JJ; 6K; 6½K
J78-14	6JJ; 6K; 6½JJ; 7JJ
A78-15	4½JJ; 5JJ; 5½JJ
C78-15	4½JJ; 5JJ; 5½JJ; 6JJ; 4½K; 5K; 5½K
D78-15	5JJ; 5½JJ; 6JJ; 5K
E78-15	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 5½K
F78-15	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 5½K
G78-15	5½JJ; 6JJ; 6½JJ; 7JJ; 5½K; 6K; 6L
H78-15	6JJ; 6½JJ; 7JJ; 6K; 6L; 6½K
L84-15	5½JJ; 6JJ; 6½JJ; 7JJ
J78-15	6JJ; 6K; 6L; 6½JJ; 7JJ
L78-15	6JJ; 6K; 6L; 6½JJ; 7JJ
M78-15	7JJ; 8JJ; 6½JJ
N50-14	9JJ
C50-15	7JJ
A60-13	5½JJ; 6JJ; 6½JJ; 7JJ
B60-13	6JJ; 7JJ; 5½JJ; 6½JJ
C60-13	6JJ; 6½JJ; 7JJ; 8JJ
D60-13	6JJ; 6½JJ; 7JJ; 8JJ
D60-14	6JJ; 6½JJ; 7JJ; 8JJ
E60-14	7JJ; 6JJ; 6½JJ; 8JJ
F60-14	7JJ; 6½JJ; 8JJ
G60-14	7JJ; 8JJ; 9JJ; 6½JJ
H60-14	6½JJ; 7JJ; 8JJ; 9JJ
J60-14	7JJ; 8JJ; 9JJ
L60-14	8JJ; 9JJ; 10JJ
B60-15	5½JJ
C60-15	5½JJ; 6JJ; 6½JJ; 7JJ; 7K
E60-15	6JJ; 7JJ; 8JJ; 6½JJ

Tyre ** Size Designation	Approved Rims
P60-15	6½JJ; 7JJ; 8JJ
G60-15	7JJ; 8JJ; 9JJ; 6½JJ
H60-15	7JJ; 8JJ; 8K; 9JJ
J60-15	7JJ; 8JJ; 9JJ
L60-15	7JJ; 8JJ; 9JJ
E50C-16	16C - 3½
F50C-16	16C - 3½
G50C-17	17C - 3½
H50C-17	17C - 3½
L50C-18	18C - 3½; 18C - 4
AR78-13	4½JJ; 5JJ; 5½JJ
BR78-13	4½JJ; 5JJ; 6JJ; 5½JJ
CR78-13	5JJ; 5½JJ; 6JJ
BR78-14	4½JJ; 5JJ; 5½JJ
CR78-14	4½JJ; 5JJ; 5½JJ; 6JJ
DR78-14	5JJ; 6JJ; 5½JJ
ER78-14	5JJ; 5½JJ; 6JJ; 6½JJ
FR78-14	5½JJ; 6JJ; 6½JJ; 7JJ
GR78-14	6JJ; 5½JJ; 6½JJ; 7JJ
HR78-14	6JJ; 6½JJ; 7JJ
JR78-14	6JJ; 6½JJ; 7JJ
AR78-15	4½JJ; 4JJ; 5JJ
BR78-15	4½JJ; 5JJ; 5½JJ
CR78-15	5JJ
ER78-15	5½JJ; 5JJ; 6JJ
FR78-15	5½JJ; 5JJ; 6JJ; 6½JJ
GR78-15	5½JJ; 6JJ; 6½JJ; 7JJ
HR78-15	5½JJ; 6JJ; 6½JJ; 7JJ
JR78-15	7JJ; 6JJ; 6½JJ
LR78-15	6JJ; 6½JJ; 7JJ
MR78-15	6½JJ
NR78-15	7JJ
YR78-12	4JJ; 4½JJ; 5JJ
ZR78-12	4½JJ; 5JJ; 5½JJ
YR78-13	4JJ; 4½JJ; 5JJ
ZR78-13	4½JJ; 5JJ; 5½JJ
YR78-14	4JJ; 4½JJ; 5JJ
WR78-15	3½JJ; 4JJ; 4½JJ
ZR78-15	4JJ; 4½JJ; 5JJ
205/50R15	5½JJ; 5½K; 6JJ; 6L; 6½JJ; 6½K; 6½L; 7K; 7½K
225/50R15	6JJ; 6L; 6½JJ; 6½K; 6½L; 7K; 7½K; 8K; 8JJ
165/70R10	4½JJ
165/70R13	4½JJ; 5JJ; 5½JJ; 4JJ
175/70R13	5JJ; 5½JJ; 4½JJ; 5.50; 5.50B; 6JJ
185/70R13	5JJ; 5½JJ; 6JJ; 6½JJ; 4½JJ
195/70R13	5½JJ; 6JJ; 6½JJ; 5JJ
155/70R14	4JJ; 4½JJ; 5JJ; 4.00C; 4.50C; 5K
175/70R14	5JJ; 5½JJ; 4½JJ; 6JJ
185/70R14	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 6L; 4½JJ
195/70R14	5½JJ; 6JJ; 6½JJ; 5JJ
175/70R15	5JJ; 4½JJ; 5½JJ; 6JJ; 5K
185/70R15	5JJ; 5½JJ; 6JJ; 6½JJ; 5K; 6L
205/70R13	5½JJ; 6JJ; 6½JJ; 7JJ
205/70R14	5½JJ; 6JJ; 6½JJ; 7JJ
215/70R14	6JJ; 6L; 6½JJ; 7JJ
225/70R14	6JJ; 6L; 6½JJ; 7JJ; 7L; 7½K; 8JJ
195/70R15	5½JJ; 6JJ; 6½JJ; 6L
205/70R15	5½JJ; 6JJ; 6½JJ; 7JJ; 6½L; 6L
215/70R15	6JJ; 6L; 6½JJ; 7L; 5½JJ; 7JJ; 6½L
225/70R15	6JJ; 6½JJ; 7JJ; 6L; 7L; 7½K; 6½K; 7K
235/70R15	6K; 6½JJ; 6½JJ; 7JJ; 8JJ

NOTE: It is permissible to use existing J or JK Rims where 'JJ' Rims are specified in the above Table.

** From Table 1.

TABLE 2.0 PART A (CONTINUED)
APPROVED RIMS FOR TYRES

Tyre Size Designation	Approved Rims	Tyre Size Designation	Approved Rims
145-10	4JJ, 4½JJ, 5JJ, 5½JJ, 3.50B	5.9-10	4JJ, 5JJ, 4½JJ
125-12	3½JJ, 4JJ	5.9-12	4JJ, 4½JJ, 5JJ
135-12	3½JJ, 4JJ, 4½JJ	6.2-12	4JJ, 4½JJ, 5JJ
145-12	4JJ, 4½JJ, 5JJ	6.2-13	4JJ, 4½JJ, 5JJ
155-12	4JJ, 4½JJ, 5JJ	6.5-13	4½JJ, 5JJ, 5½JJ
135-13	3½JJ, 4JJ, 4½JJ	6.9-13	4½JJ, 5JJ, 5½JJ, 6JJ
145-13	4JJ, 4½JJ, 5JJ, 4.50B	6.2-15	4JJ, 4½JJ, 5JJ
155-13	4JJ, 4½JJ, 5JJ, 4.50B	6.9-15	4½JJ, 5JJ, 5½JJ, 6JJ
165-13	4½JJ, 5JJ, 5½JJ, 4.50B, 5.50B	5.20 R 10	3½JJ, 4JJ, 4½JJ
175-13	4½JJ, 5JJ, 5½JJ, 6JJ, 5.50B	5.00 R 12	3½JJ, 4JJ
185-13	5JJ, 5½JJ, 6JJ, 6½JJ	5.20 R 12	3½JJ, 4JJ, 4½JJ
195-13	5JJ, 5½JJ, 6JJ, 6½JJ	5.50 R 12	4JJ, 4½JJ
135-14	3½JJ, 4JJ, 4½JJ	5.60 R 12	4JJ, 4½JJ, 5JJ
145-14	4JJ, 4½JJ, 5JJ	5.00 R 13	3½JJ, 4JJ
155-14	4JJ, 4½JJ, 5JJ	5.20 R 13	3½JJ, 4JJ, 4½JJ
165-14	4½JJ, 5JJ, 5½JJ	5.50 R 13	4JJ, 4½JJ
175-14	4½JJ, 5JJ, 5½JJ, 6JJ	5.60 R 13	4JJ, 4½JJ, 5JJ
185-14	5JJ, 5½JJ, 6JJ, 6½JJ	6.00 R 13	4JJ, 4½JJ, 5JJ
195-14	5JJ, 5½JJ, 6JJ, 6½JJ	5.90 R 13	4JJ, 4½JJ, 5JJ
205-14	6JJ, 5½JJ, 6½JJ, 7JJ	6.40 R 13	4½JJ, 5JJ, 5½JJ
215-14	5½JJ, 6JJ, 6½JJ, 7JJ	6.50 R 13	4½JJ, 5JJ, 5½JJ
225-14	6JJ, 6½JJ, 7JJ	6.70 R 13	4½JJ, 5JJ, 5½JJ
125-15	3½JJ, 4JJ	7.00 R 13	4½JJ, 5JJ, 5½JJ, 6JJ
135-15	3½JJ, 4JJ, 4½JJ	7.25 R 13	5JJ, 5½JJ, 6JJ
145-15	4JJ, 4½JJ, 5JJ	5.20 R 14	3½JJ, 4JJ, 4½JJ
155-15	4JJ, 4½JJ, 5JJ	5.90 R 14	4JJ, 4½JJ, 5JJ
165-15	4½JJ, 5JJ, 5½JJ	7.00 R 14	4½JJ, 5JJ, 5½JJ, 6JJ
175-15	4½JJ, 5JJ, 5½JJ, 6JJ	7.50 R 14	5JJ, 5½JJ, 6JJ, 6½JJ
180-15	4½JJ, 5JJ, 5½JJ	5.60 R 15	4JJ, 4½JJ, 5JJ
185-15	5JJ, 5½JJ, 6JJ, 6½JJ	6.40 R 15	4½JJ, 5JJ, 5½JJ
195-15	5JJ, 5½JJ, 6JJ, 6½JJ	6.70 R 15	4½JJ, 5JJ, 5½JJ, 6JJ
205-15	5½JJ, 6JJ, 6½JJ, 7JJ	7.60 R 15	5JJ, 5½JJ, 6JJ, 6½JJ
215-15	5½JJ, 6JJ, 6½JJ, 7JJ	G35C-16	16C - 4½, 16C - 5
220-15	5½JJ, 6JJ, 6½JJ, 7JJ	AR60-15	6½JJ
225-15	6JJ, 6½JJ, 7JJ	FR60-15	7½JJ
230-15	6JJ, 6½JJ, 7JJ	HR60-15	9L
235-15	6JJ, 6½JJ, 7JJ, 8JJ	185/60 R13	5JJ, 5½JJ, 6JJ, 6½JJ
240-15	6JJ, 6½JJ, 7JJ	205/60R14	6JJ; 7JJ
185-16	5JJ, 5K, 5½JJ, 5½K, 6L	245/60R14	6½JJ; 7JJ; 8JJ
165-400	4.65	235/60R15	6½JJ; 7JJ; 8JJ
G77-14	5½JJ, 6JJ, 6½JJ, 7JJ	255/60R15	7JJ; 8JJ; 9JJ; 9L
		265/60R14	7JJ; 8JJ; 9JJ
		215/60R15	6JJ; 7JJ
		C60C-15	4JJ; 4½JJ
		H50-14	8JJ

NOTE: It is permissible to use existing J or JK rims where 'JJ' rims are specified in the above table.

** Table 1

TABLE 2.0 PART A (CONTINUED)
APPROVED RIMS FOR TYRES

TYRE SIZE DESIGNATION	APPROVED RIMS
5.9-10	4JJ, 5JJ, 4JJJ
5.9-12	4JJ, 4JJJ, 5JJ
6.2-12	4JJ, 4JJJ, 5JJ
6.2-13	4JJ, 4JJJ, 5JJ
6.5-13	4JJJ, 5JJ, 5JJJ
6.9-13	4JJ, 5JJ, 5JJJ
6.2-15	4JJ, 4JJJ, 5JJ, 6JJ
6.9-15	4JJJ, 5JJ, 5JJJ, 6JJ
5.20 R 10	3JJJ, 4JJ, 4JJJ
5.00 R 12	3JJJ, 4JJ, 4JJJ
5.50 R 12	4JJ, 4JJJ, 5JJ
5.60 R 12	4JJ, 4JJJ, 5JJ
5.00 R 13	3JJJ, 4JJ
5.20 R 13	3JJJ, 4JJ, 4JJJ
5.50 R 13	4JJ, 4JJJ, 5JJ
5.60 R 13	4JJ, 4JJJ, 5JJ
6.00 R 13	4JJ, 4JJJ, 5JJ
5.90 R 13	4JJJ, 5JJ, 5JJJ
6.40 R 13	4JJ, 5JJ, 5JJJ
6.50 R 13	4JJJ, 5JJ, 5JJJ
6.70 R 13	4JJJ, 5JJ, 5JJJ, 6JJ
7.00 R 13	4JJJ, 5JJ, 5JJJ, 6JJ
7.25 R 13	5JJ, 5JJJ, 6JJ
5.20 R 14	3JJJ, 4JJ, 4JJJ
4JJ, 4JJJ, 5JJ	
5.90 R 14	4JJ, 4JJJ, 5JJ
7.00 R 14	4JJJ, 5JJ, 5JJJ, 6JJ
7.50 R 14	5JJ, 5JJJ, 6JJ, 6JJJ
5.60 R 15	4JJ, 4JJJ, 5JJ
6.40 R 15	4JJJ, 5JJ, 5JJJ
6.70 R 15	4JJJ, 5JJ, 5JJJ, 6JJ
7.60 R 15	5JJ, 5JJJ, 6JJ
6JJJ	
G35C-16	16C - 41, 16C - 5
AR60-15	6JJJ,
FR60-15	7JJJ,
HR60-15	9L
C60C-15	4JJ, 4JJJ
H50-14	8JJ

Tyre Size Designation	Approved Rims
145-10	4JJ, 4JJJ, 5JJ, 3JJJ
3.50B	
135-12	3JJJ, 4JJ
135-12	3JJJ, 4JJ, 4JJJ
145-12	4JJ, 4JJJ, 5JJ
155-12	4JJ, 4JJJ, 5JJ
135-13	3JJJ, 4JJ, 4JJJ
145-13	4JJ, 4JJJ, 5JJ, 4.50B
155-13	4JJ, 4JJJ, 5JJ, 4.50B
163-13	4JJJ, 5JJ, 5JJJ
4.50B, 5.50B	
175-13	4JJ, 5JJ, 5JJJ, 6JJ
5.50B	
185-13	5JJ, 5JJJ, 6JJ, 6JJJ
195-13	6JJ, 5JJJ, 6JJ, 6JJJ
135-14	3JJJ, 4JJ, 4JJJ
145-14	4JJ, 4JJJ, 5JJ
155-14	4JJ, 4JJJ, 5JJ
165-14	4JJJ, 5JJ, 5JJJ
175-14	4JJJ, 5JJ, 5JJJ, 6JJ
185-14	5JJ, 5JJJ, 6JJ, 6JJJ
195-14	5JJ, 5JJJ, 6JJ, 6JJJ
205-14	6JJ, 5JJJ, 6JJJ, 7JJ
215-14	5JJJ, 6JJ, 6JJJ, 7JJ
225-14	6JJ, 6JJJ, 7JJ
3JJJ, 4JJ, 4JJJ	
135-15	3JJJ, 4JJ, 4JJJ
145-15	4JJ, 4JJJ, 5JJ
155-15	4JJ, 4JJJ, 5JJ
165-15	4JJJ, 5JJ, 5JJJ
175-15	4JJJ, 5JJ, 5JJJ, 6JJ
180-15	4JJJ, 5JJ, 5JJJ, 6JJ
185-15	5JJ, 5JJJ, 6JJ, 6JJJ
195-15	5JJ, 5JJJ, 6JJ, 6JJJ
205-15	5JJJ, 6JJ, 6JJJ, 7JJ
215-15	5JJJ, 6JJ, 6JJJ, 7JJ
220-15	5JJJ, 6JJ, 6JJJ, 7JJ
225-15	6JJ, 6JJJ, 7JJ
230-15	6JJ, 6JJJ, 7JJ
235-15	6JJ, 6JJJ, 7JJ, 8JJ
240-15	6JJ, 6JJJ, 7JJ
185-16	5JJ, 5K, 5JJJ, 5JK, 6L
165-400	4.65,
677-14	5JJJ, 6JJ, 6JJJ, 7JJ

NOTE: It is permissible to use existing J or JK rims where 'JJ' rims are specified in the above table.

Tyre Size Designation	Approved Rims
345/35 R15	11JJ; 11½JJ; 12JJ; 12½JJ; 13JJ; 13½JJ
205/40 R13	7JJ; 7½JJ; 8JJ
285/40 R15	9½JJ; 10JJ; 10½JJ; 11JJ
235/45 R15	8JJ; 8½JJ; 9JJ; 9½JJ
245/45 R16	8JJ; 8½JJ; 9JJ; 9½JJ
175/50 R13	5.00B; 5.50B; 5JJ; 5½JJ; 6JJ
195/50 R15	5½JJ; 6JJ; 6½JJ; 7JJ
285/50 R15	8JJ; 8½JJ; 9JJ; 9½JJ; 10JJ
195/50 R16	5½JJ; 6JJ; 6½JJ; 7JJ
225/50 R16	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
250/50 R16	7JJ; 7½JJ; 8JJ; 8½JJ; 9JJ
265/50 R16	7½JJ; 8JJ; 8½JJ; 9JJ; 9½JJ
165/55 R12	4½JJ; 4.50B; 5JJ; 5.00B; 5½JJ; 5.50B; 6JJ
185/55 R13	5JJ; 5½JJ; 6JJ; 6½JJ
195/55 R13	5½JJ; 6JJ; 6½JJ; 7JJ
225/55 R13	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
195/55 R14	5½JJ; 6JJ; 6½JJ; 7JJ
205/55 R14	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
225/55 R14	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
195/55 R15	5½JJ; 6JJ; 6½JJ; 7JJ
205/55 R15	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
215/55 R15	6JJ; 6½JJ; 7JJ; 7½JJ
225/55 R15	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
235/55 R15	6½JJ; 7JJ; 8JJ; 8½JJ
275/55 R15	7½JJ; 8JJ; 8½JJ; 9JJ; 9½JJ
205/55 R16	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
245/55 R16	7½JJ; 8JJ; 8½JJ; 9JJ; 9½JJ
175/60 R13	5JJ; 5½JJ; 6JJ; 6½JJ
185/60 R13	5JJ; 5½JJ; 6JJ; 6½JJ
195/60 R13	5½JJ; 6JJ; 6½JJ; 7JJ
205/60 R13	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
215/60 R13	6JJ; 6½JJ; 7JJ; 7½JJ
225/60 R13	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
235/60 R13	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ; 8½JJ
185/60 R14	5JJ; 5½JJ; 6JJ; 6½JJ
195/60 R14	5½JJ; 6JJ; 6½JJ; 7JJ
205/60 R14	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
215/60 R14	6JJ; 6½JJ; 7JJ; 7½JJ
225/60 R14	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ

e Size Designation	Approved Rims
235/60 R14	6JJ; 6½JJ; 7JJ; 7½JJ; 8½JJ
245/60 R14	6½JJ; 7JJ; 7½JJ; 8JJ; 8½JJ
265/60 R14	7JJ; 7½JJ; 8JJ; 8½JJ; 9JJ; 9½JJ
195/60 R15	5½JJ; 6JJ; 6½JJ; 7JJ
205/60 R15	5½JJ; 6JJ; 6½JJ; 7½JJ
215/60 R15	6JJ; 6½JJ; 7JJ; 7½JJ
225/60 R15	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ
235/60 R15	6JJ; 6½JJ; 7JJ; 7½JJ; 8JJ; 8½JJ
255/60 R15	7JJ; 7½JJ; 8JJ; 8½JJ; 9JJ; 9L
175/65 R12	5JJ; 5½JJ; 6JJ; 6½JJ; 5.00B; 5.50B
165/65 R13	4½JJ; 5JJ; 5½JJ; 4.50B; 5.00B; 5.05E
165/65 R13	4½JJ; 5JJ; 5½JJ; 6JJ; 4.50B; 5.00B; 5.50B
175/65 R13	5JJ; 5½JJ; 6JJ; 6½JJ; 5.00B; 5.50B
185/65 R13	5JJ; 5½JJ; 6JJ; 6½JJ; 5.00B; 5.50B
195/65 R13	5½JJ; 6JJ; 6½JJ; 7JJ
155/65 R14	4½JJ; 5JJ; 5½JJ; 4.50B; 5.00B; 5.50B
165/65 R14	4½JJ; 5JJ; 5½JJ; 6JJ; 4.50B; 5.00B; 5.50B
175/65 R14	5JJ; 5½JJ; 6JJ; 6½JJ; 5.00B; 5.50B
185/65 R14	5JJ; 5½JJ; 6JJ; 6½JJ; 5.00B; 5.50B
195/65 R14	5½JJ; 6JJ; 6½JJ; 7JJ
205/65 R14	5½JJ; 6JJ; 6½JJ; 7JJ; 7½JJ
185/65 R15	5JJ; 5½JJ; 6JJ; 6½JJ
195/65 R15	5½JJ; 6JJ; 6½JJ; 7JJ
155/65 R15	5½JJ; 6½JJ; 7JJ
145/70 R10	4.00B; 4.50B; 5.00B
155/70 R10	4.00B; 4.50B; 5.00B; 5.50B
145/70 R12	4.00B; 4JJ; 4.50B; 4½JJ; 5.00B; 5JJ
155/70 R12	4.00B; 4.50B; 5.00B; 3.50C; 4.00C; 4.50C; 3.50D; 4JJ; 4½JJ; 5JJ; 4K; 4½K; 5K
165/70 R12	4.50B; 5.00B; 5.50B; 6.00B; 4.50C; 5.00C; 6.00C; 4JJ; 4½JJ; 5JJ; 5½JJ; 4½K; 5K; 5½K
175/70 R12	5.00B; 5.50B; 6.00B
135/70 R13	3½JJ; 3.50B; 4JJ; 4.00B; 4½JJ; 4.50B
145/70 R13	3.50B; 4.00B; 4.50B; 4.00C; 4.50C; 3½JJ; 4JJ; 4½JJ; 5JJ; 4½K; 5K
155/70 R13	4.00; 4.50B; 5.00E; 5.50B; 3.50C; 4.00C; 4.50C; 3.50D; 4JJ; 4½JJ; 5JJ; 5½JJ; 4K; 4½K; 5K
155/70 R14	4JJ; 4.00B; 4½JJ; 4.50B; 5JJ; 5.50B
165/70 R14	4JJ; 4½JJ; 5JJ; 5½JJ; 6JJ; 4½K; 5K; 5½K; 4½L; 5L; 5½L

TABLE 2.0 - PART A (CONTINUED)

Tyre Size Designation	Approved Rims
235/70 R14	6½JJ; 7JJ; 7½JJ; 8JJ; 8½JJ
245/70 R14	7JJ; 7½JJ; 8JJ; 8½JJ
145/70 R15	4JJ; 4½JJ; 5JJ
165/70 R15	4½JJ; 5JJ; 5½JJ; 6JJ
245/70 R15	7JJ; 7½JJ; 8JJ; 8½JJ
255/70 R15	4.00B; 4.50B; 3.50C; 4.00C; 3.50D; 4JJ; 4½JJ; 5JJ; 5½JJ; 4K; 4½K; 5K
250/80 R16	6JJ; 6½JJ; 7JJ; 7½JJ

NOTE: It is permissible to use exchange J or JK Rims when 'JJ' Rims are specified in the above table

Nominal Tyre Section Width Designation *	Approved Rim Width (mm)
140	80, 95, 105, 120
150	95, 105, 120, 135
160	95, 105, 120, 135
170	105, 120, 135, 150
180	105, 120, 135, 150
190	120, 135, 150, 165
200	120, 135, 150, 165
210	135, 150, 165, 180
220	135, 150, 165, 180
230	150, 165, 180, 195
240	150, 165, 180, 195
250	165, 180, 195, 210
260	165, 180, 195, 210
270	180, 195, 210
280	180, 195, 210

* Table 1 refers

NOTE: The above data applies to both "TD" and "TR" tyres which are marked accordingly. TR tyres can be mounted on "TD" or "TR" rims, but only "TD" RIMS must be used for "TD" tyres.

TABLE 2 - APPROVED RIMS

TABLE 2.0 PART B

APPROVED RIMS FOR TYRES

Tyre ** Size Designation	Approved Rims
5.60-13	3½JJ
5.20-14	3.00D
8.25-15	5JJ; 5K
9.15-15	5½JJ; 5½K
145R12	3.50D; 3½JJ
145R13	3.50D; 3½JJ
155R13	5½JJ
165R13	4JJ
175R13	4JJ
205R14	7½K
205R15	7½K
D70-14	5JJ
G70-14	8JJ
C70-15	7JJ
F70-15	7½JJ; 8JJ
G70-15	8JJ
AR70-14	4½JJ
FR70-14	5½JJ; 8JJ

Tyre ** Size Designation	Approved Rims
DR70-15	5JJ
A78-13	4JJ; 6JJ
C78-14	4½JJ
D78-14	4½JJ
E78-14	4½JJ; 5L; 7JJ
G78-14	5JJ
E78-15	4½K
F78-15	4½K
G78-15	5JJ; 5K
M78-15	5½JJ; 5½K
195R14	7JJ
AR78-13	6JJ
ER78-14	7JJ
FR78-14	5JJ
185/70VR15	7JJ
195/70R14	5JJ
215/60VR15	8JJ
175/80R16	4½JJ; 5JJ; 5½JJ; 6JJ

Note: It is permissible to use existing J or JK Rims where 'JJ' Rims are specified in the above table

** From Table 1

TABLE 2.1 - PART AAPPROVED RIMS FOR 'P' TYPE RADIAL PLY TYRES

Nominal Tyre ** Section width Designation	Approval Rim Width (Inches)
P125	3½, 4, 4½, *5
P135	3½, 4, 4½, *5
P145	4, 4½, 5, *5½
P155	4, 4½, 5, 5½, *6
P165	4½, 5, 5½, 6, *6½
P175	4½, 5, 5½, 6, *6½, *7
P185	5, 5½, 6, 6½, *7
P195	5, 5½, 6, 6½, 7, *7½
P205	5½, 6, 6½, 7, 7½, *8
P215	5½, 6, 6½, 7, 7½, *8, *8½
P225	6, 6½, 7, 7½, 8, *8½, *9
P235	6, 6½, 7, 7½, 8, *8½, *9
P245	6½, 7, 7½, 8, 8½, 9
P255	6½, 7, 7½, 8, 8½, 9, *10
P265	7, 7½, 8, 8½, 9, *10
P275	7, 7½, 8, 8½, 9, 10, *11

** Table 1

Note: 3½ and 4 inch rim width in 13 inch nominal diameter and all 12 inch nominal diameter have 'B' contour. All others have 'JJ' contour for 14 and 15 inch nominal diameters and 'JB' for 13 inch diameters.

* Additional approved rims only for "55 Series" and below tyres.