

SECTION 10: MISCELLANEOUS

10.1 Speedometer

10.2 Driver's Field of View

10.3 Warning Device (Horn)

10.4 Windscreen Wipers

10.1 SPEEDOMETER

All Street Rods must be fitted with a speedometer. Speedometers in replica Street Rods must indicate the speed in kilometres per hour.

10.2 DRIVER'S FIELD OF VIEW

At the completion of all work, including the installation of the engine, bonnet and bonnet scoops, a person sitting in the driver's seat at its rearmost position must have: an unobstructed view of either the road 11 metres beyond their eye point on a flat, level surface, or the front edge of the original body, including when looking across the top of the bonnet scoop if fitted; and an unobstructed view above the horizontal plane. These requirements are illustrated in Figure 10.

For the purposes of these requirements, the driver's eye position is taken as being a point 730mm above and 270mm forward of the junction of the seat cushion and squab (back) with the seat in its lowest and rearmost position.

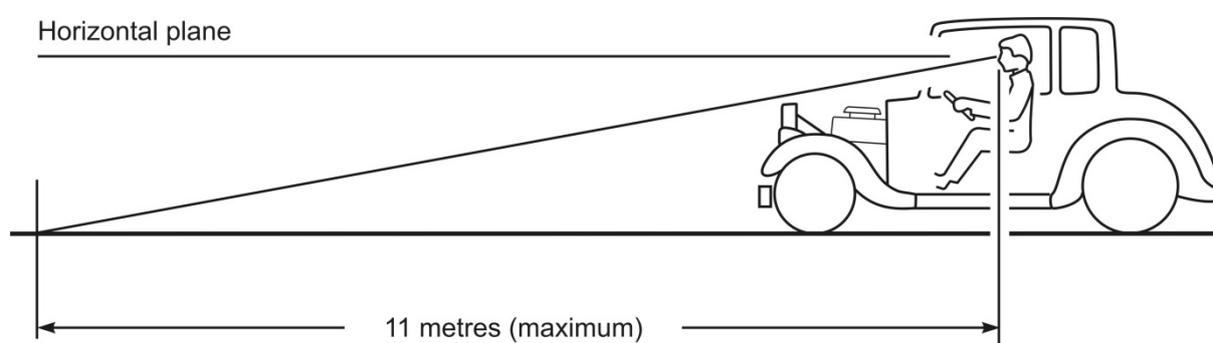


Figure 10 Requirements for the driver's forward field of view

10.3 WARNING DEVICE (HORN)

- 10.3.1 All Street Rods must be fitted with a horn or other warning device.
- 10.3.2 The device must not sound like a siren, exhaust whistle, compressions whistle or repeater horn. A klaxon or non-musical horn may be used.
- 10.3.3 The warning device must be capable of being operated from the normal driving position by a dedicated button or self-releasing switch.

10.4 WINDSCREEN WIPERS

- 10.4.1 With the exception of those Street Rods described in Paragraph 10.4.2, windscreen wipers must be fitted to all Street Rods. Both driver and passenger sides of the windscreen must be wiped.
- 10.4.2 Windscreen wipers are not required on open cars such as T-Buckets and Roadsters where the top of the windscreen is below the driver's normal line of vision in accordance with Rule 45 of the AVSR.
- 10.4.3 Open cars that require windscreen wipers may have removable wiper assemblies, providing they are carried in the Street Rod at all times.
- 10.4.4 The driver must be able to control the operation of the windscreen wipers from the normal driving position.
- 10.4.5 The wipers must be capable of continuous operation once they are switched on.